



The information in this document pertains to use in the UNITED STATES ONLY, Allowable Stress Design. Refer to the ALLJOIST® Specifier Guide Canada for use in Canada, Limit States Design.

ALLJoist®

SPECIFIER GUIDE

Includes AJS®

140 / 150 / 20 / 190 / 25

and VERSA-LAM® BEAMS


2x3 Flanges AJS® 140 / 150 / 20 / 190

2x4 Flanges AJS® 25




US Version

product manufactured in
St. Jacques, New Brunswick Canada



Boise Cascade
Engineered Wood Products



ASG US
08/08/2013



Makes Designing Homes Easier

**Architects, engineers, and designers trust
Boise Cascade's engineered wood products
to provide a better system for framing floors
and roofs.**

It's the SIMPLE FRAMING SYSTEM®, featuring beams, joists and rim boards that work together as a system, so you spend less time cutting and fitting. In fact, the SIMPLE FRAMING SYSTEM® uses fewer pieces and longer lengths than conventional framing, so you'll complete jobs in less time.

You'll Build Better Homes with the SIMPLE FRAMING SYSTEM®

Now it's easier than ever to design and build better floor systems. When you specify the SIMPLE FRAMING SYSTEM®, your clients will have fewer problems with squeaky floors and ceiling gypsum board cracks. The SIMPLE FRAMING SYSTEM® also means overall better floor and roof framing than dimension lumber allows.

Better Framing Doesn't Have to Cost More

Boise Cascade Engineered Wood Products' SIMPLE FRAMING SYSTEM® often costs less than conventional framing methods when the resulting

reduced labor and materials waste are considered. There's less sorting and cost associated with disposing of waste because you order only what you need. Although our longer lengths help your clients get the job done faster, they cost no more.

Environmentally Sound

As an added bonus, floor and roof systems built with AJS® Joists require about half the number of trees as those built with dimension lumber. This helps you design a home both you and future generations will be proud to own.

What Makes the SIMPLE FRAMING SYSTEM® So Simple?

☑ Floor and Roof Framing with ALLJOIST® Product

Light in weight, but heavy-duty, ALLJOIST® Product (AJS® Joists) have a better strength / weight ratio than dimension lumber. Knockouts can be removed for cross-ventilation and wiring.

☑ Ceilings Framed with AJS® Joists

The consistent size of AJS® Joists helps keep gypsum board flat and free of unsightly nail pops and ugly shadows, while keeping finish work to a minimum.

☑ VERSA-LAM® Beams for Floor and Roof Framing

These highly-stable beams are free of the large-scale defects that plague dimension beams. The result is quieter, flatter floors (no camber) and no shrinkage-related call-backs.


☑ BOISE CASCADE® Rimboard

Boise Cascade Engineered Wood Products offer several engineered rimboard products regionally, including BOISE CASCADE® Rimboard OSB, BOISE CASCADE® Rimboard and VERSA-RIM® (check supplier or Boise Cascade EWP representative for availability). These products work with AJS® Joists to provide a solid connection at the critical floor/wall intersection.


ALLJOIST® Product Profiles, Architectural Specifications	3
About Floor Performance, AJS® Residential Floor Span Tables, One Hour Floor/Ceiling Assembly	4
Safety Warning	5
AJS® Floor Framing Details	5 - 6
AJS® Joist Hole Location and Sizing	7
AJS® Cantilever Tables/Details	8 - 10
Web Stiffener Requirements	10
Large Rectangular Holes in AJS® Joists	10
AJS® Floor Load Tables	11 - 13
AJS® Roof Framing Details	14 - 15
AJS® Roof Span Tables	16 - 20
AJS® Roof Load Tables	21 - 25
AJS® Design Properties	26

Connection Details	26
BOISE CASCADE® Rimboard Products /Properties	27
VERSA-LAM® Products, Specifications, Allowable Holes	28
VERSA-LAM® Beam Details, Multiple Member Connectors	29
VERSA-LAM® Floor Load Tables (100% Load Duration)	30
VERSA-LAM® Snow Roof Load Tables (115% Load Duration)	31
VERSA-LAM® Non-Snow Roof Load Tables (125% Load Duration) ...	32
VERSA-LAM® Allowable Nailing and Design Values	33
VERSA-LAM® Columns, VERSA-STUD®	34
Computer Software	35
Framing Connectors - Simpson Strong-Tie®	36 - 37
Framing Connectors - USP Structural Connectors®	38 - 39
Lifetime Guarantee	Back Cover


AJS® 140




AJS® 150




AJS® 20



AJS® 190



AJS® 25




2x3 Flanges


2x4 Flanges



AJS® 25 Deeper Depths



AJS® 30 Deeper Depths



2x4 Flanges

Information on deeper depth AJS® joists is available in the ALLJOIST® Commercial Guide

ALLJOIST® Product Architectural Specifications

EVALUATION SUBJECT: AJS® Series Prefabricated Wood I-Joists

1.0 Evaluation Scope:

Compliance with the following codes:

- *International Building Code®* (IBC)
- *International Residential Code®* (IRC)

Properties Evaluated: Structural.

2.0 Uses: The AJS® Joists are prefabricated wood I-joists used as floor joists, roof rafters and blocking panels, to support code-required loads. Prefabricated wood I-joists described in this report comply with Section 2303.1.2 of the IBC and Section R502.1.4 of the IRC, for allowable stress design.

3.0 Description:

3.1 General: The AJS® Series prefabricated wood I-joists have solid-sawn lumber or composite lumber flanges and oriented strand board (OSB) webs. The top and bottom flanges are parallel, creating constant-depth joists. The web-to-web joints of the I-joists are square butt joints and conform to the specifications in the approved quality control manuals. The web-to-flange connection is a proprietary grooved connection, also conforming to the approved quality control manuals. The I-joists are available in various lengths and depths. See ESR-1144 Table 1 for full description of the AJS® I-Joists.

3.2 Material Specifications:

3.2.1 Flanges: The flanges of the I-joists are sawn lumber or composite lumber conforming to the specifications in the approved quality control manuals. The composite lumber flanges are 1 1/2 inch by 2 1/2 inch (38 by 64 mm) spruce-

pine-fir (SPF) and are used interchangeably with any of the sawn lumber flanges of the same dimensions. The sawn lumber flange material, grade, width and depth are noted in ESR-1144, Table 1.

3.2.2 Web: Web material for the I-Joists is 3/8-inch-thick (10mm) or 7/16-inch-thick (11mm) OSB conforming to Exposure 1 requirements of DOC PS-2, with further requirements set forth in the approved quality control manuals and manufacturing standards.

3.2.3 Adhesive: Adhesives used in the fabrication of the I-joists are exterior-type, heat durable adhesives complying with ASTM D 2559 and ASTM D 5055, and are specified in the quality control manuals and the manufacturing standards.

4.0 Design and Installation: Design of the prefabricated wood I-joists described in this report shall be in accordance with the applicable code. Additionally, the design and installation of the prefabricated wood I-joists shall comply with Sections 4.1 through 4.12 listed in ESR-1144 which include 4.1 Allowable Structural Capacity, 4.2 Fasteners, 4.3 Web Stiffeners, 4.4 Lateral Support, 4.5 Holes in I-Joist Web, 4.6 Duration of Load, 4.7 In-Service Moisture Conditions, 4.8 Repetitive-Member Use, 4.9 Member Spans, 4.10 Deflection, 4.11 Blocking Panels, & 4.12 Cantilevered Joists, and the manufacturer's installation instructions.

5.0 Conditions of Use: The AJS® Series I-joists described in this report comply with, or are suitable alternatives to what is specified in, those codes listed under ESR-1144, Section 1.0 Evaluation Scope of these specifications, subject to the following conditions:

5.1 AJS® joists must be installed in accordance with this report and the manufacturer's installation instructions.

5.2 Drawings and design details verifying compliance with this report must be submitted to the code official when requested. The drawings and calculations must be prepared by a registered design professional where required by the statutes of the jurisdiction in which the project is to be constructed.

5.3 Flanges of the I-joist may not be cut or notched, unless an engineered design prepared by a registered design professional is submitted to the code official for approval.

5.4 The AJS® joists are manufactured by Boise Cascade Wood Products, L.L.C. at their plant in St. Jacques, New Brunswick, Canada under an approved quality control program with inspections by APA – The Engineered Wood Association (AA-649).

6.0 Evidence Submitted:

Data in accordance with the ICC-ES Acceptance Criteria for Prefabricated Wood I-joists (AC14), dated February 2013.

7.0 Identification:

AJS® I-joists are identified by a stamp indicating the joist model; company name (Boise Cascade Wood Products, L.L.C.); manufacturing location; evaluation report number (ESR-1144); and the name and logo of the inspection agency (APA).

AJS® Joists in Commercial Projects: The 18" and deeper depth AJS® joists are intended for commercial projects with heavier design loads and longer spans. All commercial projects utilizing AJS® joists shall have an engineer or architect of record.



Boise Cascade
Engineered Wood Products

ALLJOIST® Residential Floor Span Tables

About Floor Performance

Homeowner's expectations and opinions vary greatly due to the subjective nature of rating a new floor. Communication with the ultimate end user to determine their expectation is critical. **Vibration** is usually the cause of most complaints. Installing lateral bridging may help; however, squeaks may occur if not installed properly. Spacing the joists closer together does little to affect the perception of the floor's performance. The most common methods used to increase the performance and reduce vibration of wood floor systems is to

increase the joist depth, limit joist deflections, glue and screw a thicker, tongue-and-groove subfloor, install the joists vertically plumb with level-bearing supports, and install a direct-attached ceiling to the bottom flanges of the joists.

The floor span tables listed below offer three very different performance options, based on performance requirements of the homeowner.


Joist Depth	ALLJOIST® Series	★★★THREE STAR★★★				★★★★FOUR STAR★★★★				CAUTION	★ MINIMUM STIFFNESS ALLOWED BY CODE ★		CAUTION
		Live Load deflection limited to L/480: The common industry and design community standard for residential floor joists, 33% stiffer than L/360 code minimum. However, floor performance may still be an issue in certain applications, especially with 9½" and 11⅞" deep joists without a direct-attached ceiling.				Live Load deflection limited to L/960+: A floor that is 100% stiffer than the three star floor. A premium floor that 100% stiffer than the 3-star floor for the discriminating homeowner.				Live Load deflection limited to L/360: Floors that meet the minimum building code L/360 criteria are structurally sound to carry the specified loads; however, there is a much higher risk of floor performance issues. This table should only be used for applications where floor performance is not a concern.			
		12" O.C.	16" O.C.	19.2" O.C.	24" O.C.	12" O.C.	16" O.C.	19.2" O.C.	24" O.C.	12" O.C.	16" O.C.	19.2" O.C.	24" O.C.
9½"	140	17'–9"	16'–3"	15'–4"	13'–11"	13'–11"	12'–8"	11'–11"	11'–1"	19'–8"	17'–0"	15'–6"	13'–11"
	150	18'–1"	16'–7"	15'–8"	14'–7"	14'–2"	12'–11"	12'–2"	11'–3"	20'–0"	18'–3"	16'–8"	14'–11"
	20	19'–1"	17'–5"	16'–5"	15'–4"	14'–10"	13'–6"	12'–9"	11'–10"	21'–1"	19'–3"	18'–2"	16'–4"
	190	19'–4"	17'–8"	16'–8"	15'–6"	15'–1"	13'–9"	12'–11"	12'–0"	21'–4"	19'–7"	18'–6"	17'–3"
	25	21'–0"	19'–1"	18'–0"	16'–9"	16'–4"	14'–10"	14'–0"	12'–11"	23'–2"	21'–1"	19'–3"	17'–2"
11⅞"	140	21'–2"	19'–4"	17'–8"	15'–10"	16'–7"	15'–1"	14'–3"	13'–3"	22'–5"	19'–5"	17'–8"	15'–10"
	150	21'–7"	19'–8"	18'–7"	17'–0"	16'–10"	15'–4"	14'–6"	13'–5"	23'–10"	20'–10"	19'–0"	17'–0"
	20	22'–8"	20'–9"	19'–7"	18'–3"	17'–9"	16'–2"	15'–2"	14'–1"	25'–1"	22'–10"	20'–10"	18'–8"
	190	23'–0"	21'–0"	19'–10"	18'–6"	18'–0"	16'–4"	15'–5"	14'–4"	25'–5"	23'–3"	21'–11"	19'–0"
	25	24'–11"	22'–9"	21'–5"	18'–3"	19'–6"	17'–8"	16'–8"	15'–5"	27'–7"	24'–0"	21'–11"	18'–3"
14"	140	24'–0"	21'–4"	19'–5"	17'–4"	18'–10"	17'–2"	16'–2"	15'–0"	24'–7"	21'–4"	19'–5"	17'–4"
	150	24'–6"	22'–4"	20'–11"	18'–9"	19'–2"	17'–6"	16'–5"	15'–3"	26'–6"	22'–11"	20'–11"	18'–9"
	20	25'–9"	23'–6"	22'–2"	19'–1"	20'–2"	18'–4"	17'–3"	16'–0"	28'–5"	25'–1"	22'–11"	19'–1"
	190	26'–1"	23'–10"	22'–6"	19'–1"	20'–5"	18'–7"	17'–6"	16'–3"	28'–10"	26'–4"	23'–11"	19'–1"
	25	28'–4"	25'–10"	22'–11"	18'–4"	22'–1"	20'–1"	18'–11"	17'–6"	30'–5"	26'–4"	22'–11"	18'–4"
16"	140	26'–6"	22'–11"	20'–11"	18'–9"	20'–10"	19'–0"	17'–11"	16'–8"	26'–6"	22'–11"	20'–11"	18'–9"
	150	27'–1"	24'–7"	22'–5"	19'–3"	21'–3"	19'–4"	18'–3"	16'–11"	28'–5"	24'–7"	22'–5"	19'–3"
	20	28'–6"	26'–0"	24'–2"	19'–3"	22'–4"	20'–4"	19'–1"	17'–9"	31'–3"	27'–0"	24'–2"	19'–3"
	190	28'–11"	26'–5"	24'–2"	19'–3"	22'–8"	20'–7"	19'–5"	18'–0"	31'–11"	28'–11"	24'–2"	19'–3"
	25	31'–4"	27'–10"	23'–2"	18'–6"	24'–6"	22'–3"	20'–11"	18'–6"	32'–9"	27'–10"	23'–2"	18'–6"

- Table values based on residential floor loads of 40 psf live load and 10 psf dead load (12 psf dead load for AJS® 25 joists).
- Table values assume that $\frac{23}{32}$ " min. plywood/OSB rated sheathing is glued and nailed to joists.
- Table values represent the most restrictive of simple or multiple span applications.
- Table values are the maximum allowable clear distance between supports. Analyze multiple span joists with BC CALC® sizing software if the length of any span is less than half the length of an adjacent span.
- Table values assume minimum bearing lengths without web stiffeners for joist depths of 16" inches and less.

- Floor tile will increase dead load and may require specific deflection limits, contact Boise Cascade EWP Engineering for further information.
- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® sizing software.

Shaded values do not satisfy the requirements of the North Carolina State Building Code. Refer to the THREE STAR table when spans exceed 20 feet.

One-Hour Floor/Ceiling Assembly

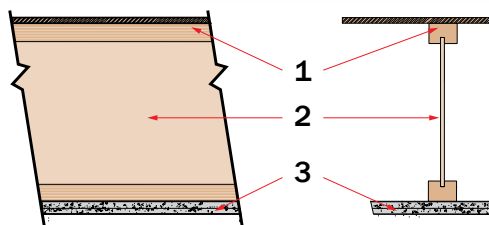

See the US version of the Boise Cascade Fire Design & Installation Guide for specific assembly information and other fire resistive options or contact your local Boise Cascade representative.

FIRE ASSEMBLY COMPONENTS

- Min. $\frac{23}{32}$ -inch T&G Wood Structural Panels. A construction adhesive must be applied to the top of the joists prior to placing sheathing. The sheets shall be installed with their long edge perpendicular to the joists with end joists centered over the top flange of joists and staggered one joist spacing with adjacent sheets.
- AJS® Joists at 24" o.c. or less.
- Two layers $\frac{1}{2}$ " Type C or two layers $\frac{5}{8}$ " Type X gypsum board

SOUND ASSEMBLY COMPONENTS

When constructed with resilient channels

- Add carpet & pad to fire assembly:
- Add $\frac{3}{4}$ " glass fiber insulation to fire assembly:
- Add an additional layer of minimum $\frac{5}{8}$ " sheathing and $\frac{9}{16}$ " glass fiber insulation to fire assembly:

STC=54	IIC=68
STC=55	IIC=46
STC=61	IIC=50

or
or

NOTE

The illustration below is showing several suggested applications for the Boise Cascade EWP products. It is not intended to show an actual house under construction.

NO MIDSPAN BRIDGING IS REQUIRED FOR ALLJOIST® PRODUCT

FOR INSTALLATION STABILITY, Temporary strut lines (1x4 min.) 8' on center max. Fasten at each joist with 2-8d nails minimum.

Dimension lumber is not suitable for use as a rim board in ALLJOIST® floor systems.

AJS® rim joist. See page 6.

BOISE CASCADE® Rimboard. See pages 6 and 27.

For load bearing cantilever details, see page 9.

AJS® blocking or 2x4 "squash" block on each side required when supporting a load-bearing wall above.

When installing Boise Cascade EWP products with treated wood, use only connectors/fasteners that are approved for use with the corresponding wood treatment.

VERSA-LAM® header or an AJS® header.

1½" knockout holes at approximately 12" o.c. are pre-punched.

See page 7 for allowable hole sizes and location.

VERSA-LAM® LVL beam.

Endwall blocking as required per governing building code.

AJS® Blocking is required when joists are cantilevered.

BCI® Joists, VERSA-LAM® and ALLJOIST® must be stored, installed and used in accordance with the Boise Cascade EWP Installation Guide, building codes, and to the extent not inconsistent with the Boise Cascade EWP Installation Guide, usual and customary building practices and standards. VERSA-LAM®, ALLJOIST®, and BCI® Joists must be wrapped, covered, and stored off of the ground on stickers at all times prior to installation. VERSA-

LAM®, ALLJOIST® and BCI® Joists are intended only for applications that assure no exposure to weather or the elements and an environment that is free from moisture from any source, or any pest, organism or substance which degrades or damages wood or glue bonds. Failure to correctly store, use or install VERSA-LAM®, ALLJOIST®, and BCI® Joist in accordance with the Boise Cascade EWP Installation Guide will void the limited warranty.

SAFETY WARNING

DO NOT ALLOW WORKERS ON AJS® JOISTS UNTIL ALL HANGERS, AJS® RIM JOISTS, RIM BOARDS, AJS® BLOCKING PANELS, X-BRACING AND TEMPORARY 1x4 STRUT LINES ARE INSTALLED AS SPECIFIED BELOW. SERIOUS ACCIDENTS CAN RESULT FROM INSUFFICIENT ATTENTION TO PROPER BRACING DURING CONSTRUCTION. ACCIDENTS CAN BE AVOIDED UNDER NORMAL CONDITIONS BY FOLLOWING THESE GUIDELINES:

- Build a braced end wall at the end of the bay, or permanently install the first eight feet of AJS® Joist and the first course of sheathing. As an alternate, temporary sheathing may be nailed to the first four feet of AJS® Joist at the end of the bay.
- All hangers, AJS® rim joists, rim boards, AJS® blocking panels, and x-bracing must be completely installed and properly nailed as each AJS® Joist is set.
- Install temporary 1x4 strut lines at no more than eight feet on center as additional AJS® Joists are set. Nail the strut lines to the sheathed area, or braced end wall, and to each AJS® Joist with two 8d nails.
- The ends of cantilevers must be temporarily secured by strut lines on both the top and bottom flanges.
- Straighten the AJS® Joist to within ½ inch of true alignment before attaching strut lines and sheathing.
- Remove the temporary strut lines only as required to install the permanent sheathing.
- Failure to install temporary bracing may result in sideways buckling or roll-over under light construction loads.
- Do not stack construction materials (sheathing, drywall, etc) in the middle of AJS® Joist spans, contact Boise Cascade EWP Engineering for proper storage and shoring information.



Additional floor framing details available with BC FRAMER® software (see page 35)

END BEARING DETAILS

F07

Nail BOISE CASCADE® Rimboard to AJS® Joists with 8d nail into each flange. Dimension lumber is not suitable for use as rim board with AJS® Joists.

F07A

Dimension lumber is not suitable for use as rimboard with AJS® Joists. Blocking may be required perpendicular to wall, consult design professional of record and/or local building official.

F02

AJS® rim joist. Use of AJS® rimjoist requires 2x6 wall for minimum joist bearing.

F01

AJS® blocking. Note: AJS® floor joist must be designed to carry wall above when not stacked over wall below. Blocking required underneath braced wall panels and shear walls, consult design professional of record.

F27A

Top Flange or Face Mount Joist Hanger. VERSA-LAM®

F52

One 8d nail each side at bearing. 1 1/2" minimum bearing length. To limit splitting flange, start nails at least 1 1/2" from end. Nails may need to be driven at an angle to limit splitting of bearing plate.

F08

Solid block all posts from above to bearing below.

F03

BOISE CASCADE® Rimboard. Note: AJS® floor joist must be designed to carry wall above when not stacked over wall below. Blocking required underneath braced wall panels and shear walls, consult design professional of record.

INTERMEDIATE BEARING DETAILS

F06

For load bearing wall above (stacked over wall below). AJS® Joist blocking.

F09

Blocking may be required, consult design professional of record and/or local building official. Load bearing wall above (stacked over wall below). 2x block. Nail block with one 10d nail into each flange.

F10

Backer block (minimum 12" wide). Nail with 10-10d nails. Joist Hanger. Filler block. Nail with 10-10d nails. Backer block required where top flange joist hanger load exceeds 250 lbs. Install tight to top flange.

F58

Double AJS® Joist Connection. Filler Block (see chart below). Web-Filler Nailing 12" on-center. Connection valid for all applications. Contact Boise Cascade EWP Engineering for specific conditions.

F05

Sheathing or rimboard closure. AJS® blocking required for cantilever. For load bearing cantilever, see pages 8 and 9. Uplift on backspan shall be considered in all cantilever designs.

AJS® Joist Slope Cut Reinforcement

Detail below restores original allowable shear/reaction value to cut end of AJS® joist. AJS® Joist shall not be used as a collar or rafter tension tie.

2 x 6 min. rafter. Rafter shall be supported by ridge beam or other upper bearing support.

F14

Heel Depth (see table below). 6 min. 12. 16" max. AJS® depth. 24".

Double Squash Block Vertical Load [lb/ft]

Size	Joist Spacing [in]			
	12	16	19.2	24
2x4	4463	3347	2789	2231
2x6	7013	5259	4383	3506

- Squash blocks are to be in full contact with upper floor and lower wall plate.
- Capacities shown are for a double squash blocks at each joist, SPF or better.

LATERAL SUPPORT

- AJS® Joists must be laterally supported at the ends with hangers, AJS® rim joists, rim boards, AJS® blocking panels or x-bracing. AJS® blocking panels or x-bracing are required at cantilever supports.
- Blocking may be required at intermediate bearings for floor diaphragm per IRC in high seismic areas, consult local building official.

MINIMUM BEARING LENGTH FOR AJS® JOISTS

- 1 1/2 inches is required at end supports. 3 1/2 inches is required at cantilever and intermediate supports.
- Longer bearing lengths allow higher reaction values. Refer to the building code evaluation report or the BC CALC® software.

NAILING REQUIREMENTS

- AJS® rim joist, rim board or closure panel to AJS® Joist:
 - Rims or closure panel 1 1/4 inches thick and less: 2-8d nails, one each in the top and bottom flange.
 - AJS® 140/150/20/190 rim joist: 2-16d box nails, one each in the top and bottom flange.
 - AJS® 25 rim joist: Toe-nail top flange to rim joist with 2-10d box nails, one each side of flange.
- AJS® rim joist, rim board or AJS® blocking panel to support:
 - 8d nails at 6 inches on center.
 - When used for shear transfer, follow the building designer's specification.

- AJS® Joist to support:
 - 2-8d nails, one on each side of the web, placed 1 1/2 inches minimum from the end of the AJS® Joist to limit splitting.
- Sheathing to AJS® joist, rim joist, blocking:
 - Prescriptive residential floor sheathing nailing requires 8d common nails @ 6" o.c. on edges and @ 12" o.c. in the field IRC Table R602.3(1). Closer nail spacing may be required per design professional of record.
 - 14 gauge staples may be substituted for 8d nails if the staples penetrate at least 1 inch into the joist.
 - Wood screws may be acceptable, contact local building official and/or Boise Cascade EWP Engineering for further information.

BACKER AND FILLER BLOCK DIMENSIONS

AJS® Series	Backer Block Thickness	Filler Block Thickness
140 150 20 190	1 1/8" or two 1/2" wood panels	2x_ + 5/8" wood panel
25	2x_ lumber	Double 2x_ lumber

- Cut backer and filler blocks to a maximum depth equal to the web depth minus 1/4" to avoid a forced fit.
- For deeper AJS® Joists, stack 2x lumber or use multiple pieces of 3/4" wood panels.

WEB STIFFENER REQUIREMENTS

- See *Web Stiffener Requirements* on page 10.

PROTECT AJS® JOISTS FROM THE WEATHER


- AJS® Joists is intended only for applications that provide permanent protection from the weather. Bundles of product should be covered and stored off of the ground on stickers.

AJS® RIM JOISTS AND BLOCKING

Joist Depth	Vertical Load Transfer Capacity (plf)
9 1/2"	1875
11 7/8"	1680
14"	1500
16"	1340

- Web stiffeners required at each end of blocking panel. Distance between stiffeners must be less than 24".

AJS® Joists are manufactured with 1½" round perforated knockouts in the web at approximately 12" on center

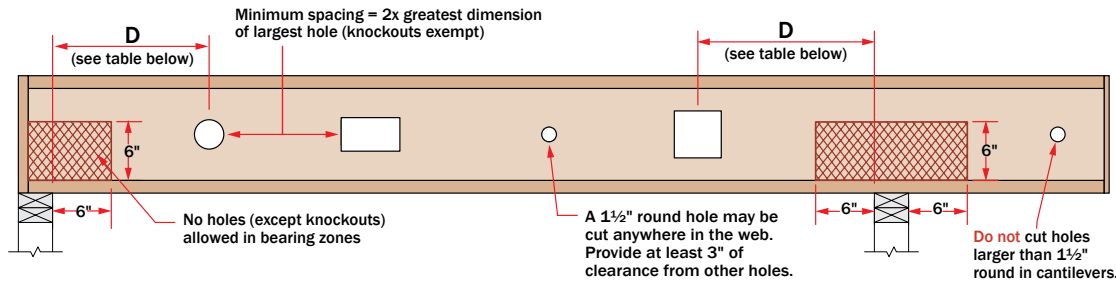

Minimum distance from support, listed in table below, is required for all holes greater than 1½"


MINIMUM DISTANCE (D) FROM ANY SUPPORT TO THE CENTERLINE OF THE HOLE																
Round Hole Diameter [in]			2	3	4	5	6	6½	7	8	8⅞	9	10	11	12	13
Rectangular Hole Side [in]			-	-	2	4	6	6	-	-	-	-	-	-	-	-
Any 9½" Joist	Span [ft]	8	2'-0"	2'-5"	2'-11"	3'-5"	3'-10"	4'-0"								
		12	3'-0"	3'-8"	4'-5"	5'-1"	5'-10"	6'-0"								
		16	4'-0"	4'-11"	5'-11"	6'-10"	7'-9"	8'-0"								
Round Hole Diameter [in]			2	3	4	5	6	6½	7	8	8⅞	9	10	11	12	13
Rectangular Hole Side [in]			-	-	-	2	3	4	5	7	8	-	-	-	-	-
Any 11⅞" Joist	Span [ft]	8	1'-0"	1'-5"	1'-10"	2'-3"	2'-8"	2'-11"	3'-1"	3'-6"	3'-11"					
		12	1'-5"	2'-1"	2'-9"	3'-5"	4'-0"	4'-4"	4'-8"	5'-4"	5'-11"					
		16	1'-11"	2'-10"	3'-8"	4'-6"	5'-5"	5'-10"	6'-3"	7'-1"	7'-10"					
		20	2'-5"	3'-6"	4'-7"	5'-8"	6'-9"	7'-3"	7'-10"	8'-11"	9'-10"					
Round Hole Diameter [in]			2	3	4	5	6	6½	7	8	8⅞	9	10	11	12	13
Rectangular Hole Side [in]			-	-	-	-	2	3	3	5	6	6	8	9	-	-
Any 14" Joist	Span [ft]	8	1'-0"	1'-1"	1'-2"	1'-4"	1'-8"	1'-11"	2'-1"	2'-6"	2'-10"	2'-11"	3'-4"	3'-9"		
		12	1'-0"	1'-1"	1'-4"	2'-0"	2'-7"	2'-11"	3'-2"	3'-10"	4'-4"	4'-5"	5'-0"	5'-7"		
		16	1'-0"	1'-1"	1'-10"	2'-8"	3'-5"	3'-10"	4'-3"	5'-1"	5'-9"	5'-11"	6'-8"	7'-6"		
		20	1'-0"	1'-3"	2'-4"	3'-4"	4'-4"	4'-10"	5'-4"	6'-4"	7'-3"	7'-4"	8'-5"	9'-5"		
		24	1'-0"	1'-7"	2'-9"	4'-0"	5'-2"	5'-10"	6'-5"	7'-8"	8'-8"	8'-10"	10'-1"	11'-3"		
Round Hole Diameter [in]			2	3	4	5	6	6½	7	8	8⅞	9	10	11	12	13
Rectangular Hole Side [in]			-	-	-	-	-	-	2	3	5	5	6	8	9	10
Any 16" Joist	Span [ft]	8	1'-0"	1'-1"	1'-2"	1'-2"	1'-3"	1'-3"	1'-3"	1'-8"	2'-0"	2'-1"	2'-5"	2'-10"	3'-2"	3'-7"
		12	1'-0"	1'-1"	1'-2"	1'-2"	1'-4"	1'-8"	1'-11"	2'-6"	3'-0"	3'-1"	3'-8"	4'-3"	4'-10"	5'-5"
		16	1'-0"	1'-1"	1'-2"	1'-2"	1'-10"	2'-2"	2'-7"	3'-4"	4'-0"	4'-2"	4'-11"	5'-8"	6'-5"	7'-2"
		20	1'-0"	1'-1"	1'-2"	1'-4"	2'-3"	2'-9"	3'-3"	4'-3"	5'-1"	5'-2"	6'-2"	7'-1"	8'-1"	9'-0"
		24	1'-0"	1'-1"	1'-2"	1'-7"	2'-9"	3'-4"	3'-11"	5'-1"	6'-1"	6'-3"	7'-4"	8'-6"	9'-8"	10'-10"

- Select a table row based on joist depth and the actual joist span rounded up to the nearest table span. Scan across the row to the column headed by the appropriate round hole diameter or rectangular hole side. Use the longest side of a rectangular hole. The table value is the closest that the centerline of the hole may be to the centerline of the nearest support.
- The entire web may be cut out. **DO NOT** cut the flanges. Holes apply to either single or multiple joists in repetitive member conditions.
- For multiple holes, the amount of uncut web between holes must equal at least twice the diameter (or longest side) of the largest hole.
- 1½" round knockouts in the web may be removed by using a short piece of metal pipe and hammer.
- Holes may be positioned vertically anywhere in the web. The joist may be set with the 1½" knockout holes turned either up or down.
- This table was designed to apply to the design conditions covered by tables elsewhere in this publication. Use the BC CALC® software to check other hole sizes or holes under other design conditions. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.

Reinforced Load Bearing Cantilever Tables

AJS® Joists


Joist Depth [in]	Joist Series	Roof Truss Span [ft]	Roof Total Load [psf]									
			35			45			55			
			Joist Spacing [in]									
			16	19.2	24	16	19.2	24	16	19.2	24	
AJS® 140	9½"	24	0	0	1	0	0	X	0	X	X	
		26	0	0	1	0	1	X	1	X	X	
		28	0	0	X	0	1	X	1	X	X	
		30	0	0	X	0	X	X	X	X	X	
		32	0	0	X	1	X	X	X	X	X	
		34	0	1	X	1	X	X	X	X	X	
		36	0	1	X	1	X	X	X	X	X	
		38	0	X	X	X	X	X	X	X	X	
		40	0	X	X	X	X	X	X	X	X	
	11⅞"	24	0	0	0	0	0	0	0	0	0	X
		26	0	0	0	0	0	1	0	0	0	X
		28	0	0	0	0	0	1	0	1	1	X
		30	0	0	0	0	0	X	0	1	X	
		32	0	0	0	0	0	X	0	1	X	
		34	0	0	1	0	0	X	0	X	X	
		36	0	0	1	0	1	X	1	X	X	
		38	0	0	1	0	1	X	1	X	X	
		40	0	0	X	0	1	X	1	X	X	
	14"	24	0	0	0	0	0	0	0	0	WS	WS
		26	0	0	0	0	0	WS	0	0	WS	
		28	0	0	0	0	0	WS	0	0	1	
		30	0	0	0	0	0	WS	0	0	1	
		32	0	0	0	0	0	WS	0	WS	X	
		34	0	0	0	0	0	1	0	WS	X	
		36	0	0	WS	0	0	1	0	1	X	
		38	0	0	WS	0	0	1	0	1	X	
		40	0	0	WS	0	WS	X	0	1	X	
16"	24	0	0	0	0	0	0	0	0	0	WS	
	26	0	0	0	0	0	0	WS	0	0	WS	
	28	0	0	0	0	0	WS	0	0	WS		
	30	0	0	0	0	0	WS	0	0	WS		
	32	0	0	0	0	0	WS	0	WS	1		
	34	0	0	WS	0	0	WS	0	WS	1		
	36	0	0	WS	0	0	WS	0	WS	1		
	38	0	0	WS	0	WS	WS	0	WS	X		
	40	0	0	WS	0	WS	1	0	WS	X		

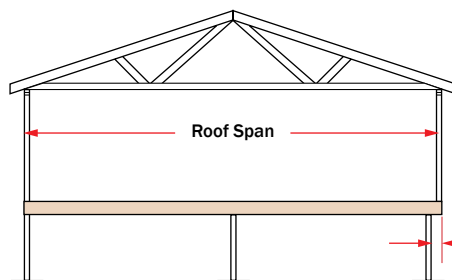

- The tables and details on pages 8 and 9 indicate the type of reinforcements, if any, that are required for load-bearing cantilevers up to a maximum length of 2'-0". Cantilevers longer than 2'-0" cannot be reinforced. **However, longer cantilevers with lower loads may be allowable without reinforcement. Analyze specific applications with the BC CALC® software.**

PLYWOOD / OSB REINFORCEMENT (If Required per Table on page 8)


- $\frac{23}{32}$ " Min. x 48" long plywood / OSB rated sheathing must match the full depth of the AJS® Joist. Nail to the AJS® Joist with 8d nails at 6" o.c. and nail with 4-8d nails into backer block. When reinforcing both sides, stagger nails to limit splitting. Install with horizontal face grain.
- These requirements assume a 100 PLF wall load and apply to AJS® Joists. Additional support may be required for other loadings. See BC CALC® software.
- Contact Boise Cascade EWP Engineering for reinforcement requirements on AJS® Joist depths greater than 16".

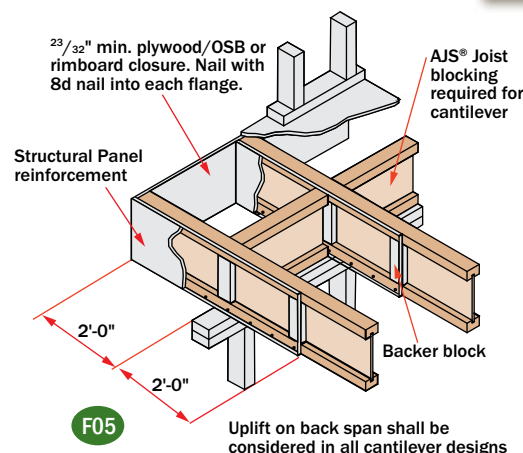

Brick Ledge Load Bearing Cantilever

F20A

Brick Ledge With Blocking Panels

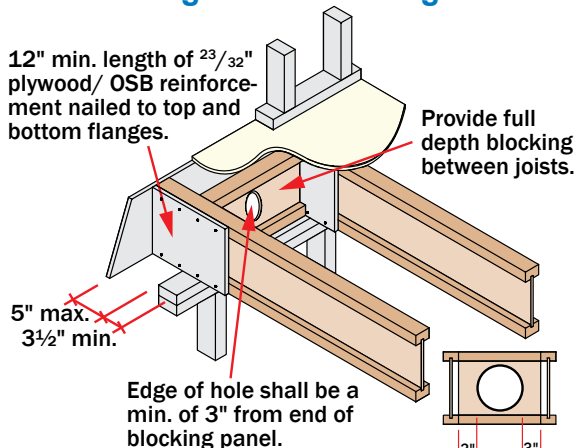


Notes:

- Use $\frac{23}{32}$ " min plywood/OSB rated sheathing. Install full depth of joist with face grain parallel to joist. Plywood reinforcement to bear fully on wall plate. Nail plywood to top and bottom joist flanges with $\frac{1}{2}$ " (8d) nails at 3" on center except $9\frac{1}{2}$ " joists, install nails at $\frac{1}{2}$ " on center.
- Provide full depth blocking between joists.
- Edge of hole shall be at a minimum of 3" from end of blocking panel.

F20B

Brick Ledge Without Blocking Panels

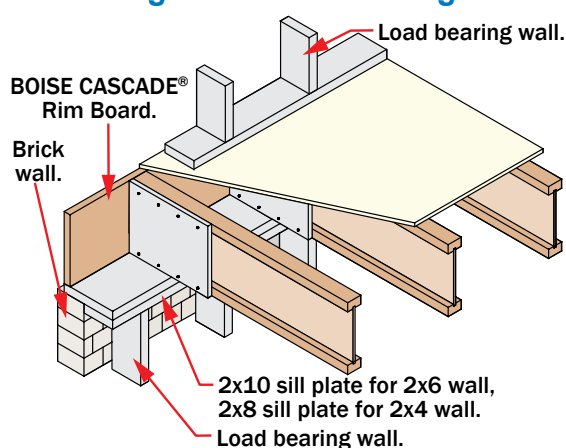

Notes:

- Use $\frac{23}{32}$ " min plywood/OSB rated sheathing. Install full depth of joist with face grain parallel to joist. Plywood reinforcement to bear fully on wall plate. Nail plywood to top and bottom joist flanges with $\frac{1}{2}$ " (8d) nails at 3" on center except $9\frac{1}{2}$ " joists, install nails at $\frac{1}{2}$ " on center.
- See page 6 for joist and rimboard connection details.

Joist Depth (inches)	Roof Truss Span (ft)	Roof Live Load (psf)											
		20 psf			30 psf			40 psf			50 psf		
		Joist Spacing o.c.											
		12"	16"	19.2"	12"	16"	19.2"	12"	16"	19.2"	12"	16"	19.2"
9½"	24'	0	0	0	0	0	1	0	1	1	0	1	1
	26'	0	0	0	0	0	1	0	1	1	0	1	2
	28'	0	0	0	0	0	1	0	1	1	0	1	2
	30'	0	0	0	0	0	1	0	1	1	1	1	2
	32'	0	0	1	0	1	1	0	1	2	1	2	2
	34'	0	0	X	0	X	X	0	1	X	1	2	X
	36'	0	X	X	0	X	X	1	X	X	1	X	X
11⅞"	24'	0	0	0	0	0	0	0	0	0	0	0	1
	26'	0	0	0	0	0	0	0	0	0	0	0	1
	28'	0	0	0	0	0	0	0	0	1	0	1	1
	30'	0	0	0	0	0	0	0	0	1	0	1	1
	32'	0	0	0	0	0	0	0	0	1	0	1	1
	34'	0	0	0	0	1	1	0	1	1	0	1	1
	36'	0	0	0	0	1	1	0	1	1	0	1	X
14"	24'	0	0	0	0	0	0	0	0	0	0	0	0
	26'	0	0	0	0	0	0	0	0	0	0	0	0
	28'	0	0	0	0	0	0	0	0	0	0	0	1
	30'	0	0	0	0	0	0	0	0	0	0	0	1
	32'	0	0	0	0	0	0	0	0	0	0	0	1
	34'	0	0	0	0	0	0	0	0	1	0	0	1
	36'	0	0	0	0	0	0	0	0	1	0	1	X

Brick Ledge Reinforcement Table

Table Design Assumptions

Roof Loading: 15 psf dead load plus a 100 PLF wall self-weight, in addition to roof live load shown. Maximum 2'-6" overhangs assumed on roof trusses.

Floor Loading: 40 psf live load plus 10 psf dead load, backspans not to exceed maximum floor spans shown on page 4.



KEY TO TABLE:

- 0 = No Reinforcement Required
- 1 = Reinforcement Required One Side of Joist
- 2 = Reinforcement Required Both Sides of Joist
- x = Use Deeper Joists or Closer Spacing

Non-Load Bearing Wall Cantilever Details


AJS® Joists are intended only for applications that provide permanent protection from the weather.

Fasten the 2x8 minimum to the AJS® Joist by nailing through the backer block and joist web with 2 rows of 10d nails at 6" on center. Clinch all nails.

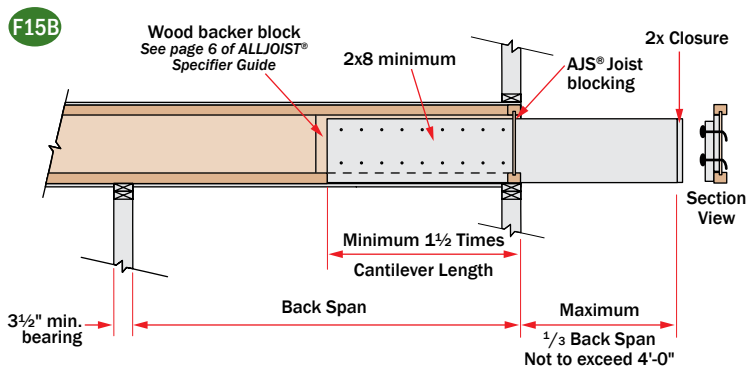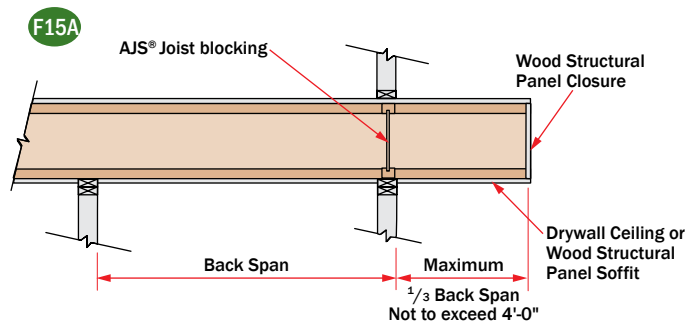

- These details apply to cantilevers with uniform loads only.
- It may be possible to exceed the limitations of these details by analyzing a specific application with the BC CALC® software.

Web Stiffener Requirements

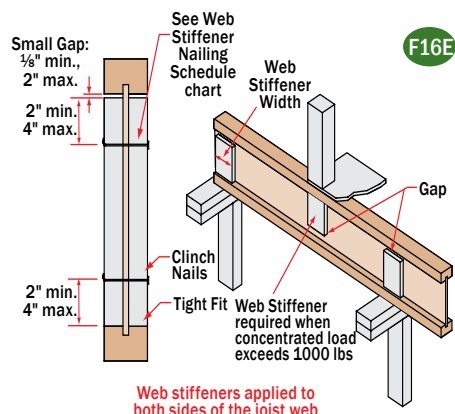

Structural Panel Web Stiffener			
AJS® Series	Minimum Thickness		Minimum Width
	In Hanger	No Hanger	
140 / 150 / 20 / 190	1"	1 1/2"	2 5/16"
25	2x4 lumber (vertical)		

Web Stiffener Nailing Schedule

AJS® Series	Joist Depth	Nailing
140 150 20 190 25	9 1/2" – 11 7/8"	3-10d
	14" – 16"	5-10d


NOTES

- Web stiffeners are optional except as noted below.
- Web stiffeners are always required for 18" and deeper AJS® joists at all bearing locations.
- Web stiffeners are always required in hangers that do not extend up to support the top flange of the AJS® Joist. Web stiffeners may be required with certain sloped or skewed hangers or to achieve uplift values. Refer to the hanger manufacturer's installation requirements.
- Web stiffeners are always required in certain roof applications. See *Roof Framing Details* on page 15.
- Web stiffeners are always required under concentrated loads that exceed 1000 pounds. Install the web stiffeners snug to the top flange in this situation. Follow the nailing schedule for intermediate bearings.
- Web stiffeners may be used to increase allowable reaction values. See AJS® *Design Properties* on page 26 of the ASG or the BC CALC® software.

Large Rectangular Holes in AJS® Joists


Hole size table based on maximum uniform load of 40 psf live load and 15 psf dead load, at maximum spacing of 24" on-center.

Single Span Joist

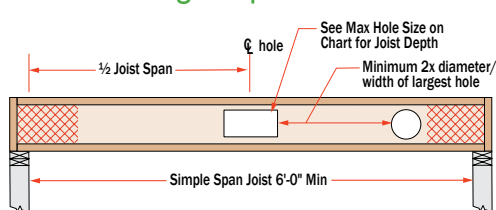

Joist Depth	Maximum Hole Size	
	Simple Span	Multiple Span
9 1/2"	6" x 12"	6" x 7"
11 7/8"	8" x 13"	8" x 8"
14"	9" x 16"	8" x 13"
	10" x 14"	9" x 11"
16"	11" x 16"	10" x 14"
	12" x 15"	11" x 12"

Multiple Span Joist

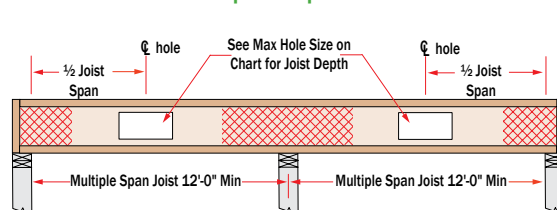

Larger holes may be possible for either Single or Multiple span joists; use BC CALC® sizing software for specific analysis.

Allowable Uniform Floor Load (in pounds per linear foot [PLF])

100% Load Duration

Span Length	AJS® 140 Series 2½" Flange Width								AJS® 150 Series 2½" Flange Width							
	9½" AJS® 140		11⅞" AJS® 140		14" AJS® 140		16" AJS® 140		9½" AJS® 150		11⅞" AJS® 150		14" AJS® 150		16" AJS® 150	
	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load
6	-	313	-	318	-	320	-	323	-	313	-	318	-	320	-	323
7	-	268	-	272	-	274	-	277	-	268	-	272	-	274	-	277
8	-	235	-	238	-	240	-	242	-	235	-	238	-	240	-	242
9	-	208	-	212	-	213	-	215	-	208	-	212	-	213	-	215
10	170	188	-	191	-	192	-	194	180	188	-	191	-	192	-	194
11	131	161	-	173	-	174	-	176	139	170	-	173	-	174	-	176
12	103	136	-	159	-	160	-	161	109	156	-	159	-	160	-	161
13	82	115	136	146	-	147	-	149	87	133	144	146	-	147	-	149
14	67	100	111	129	-	137	-	138	71	115	117	136	-	137	-	138
15	55	87	91	112	-	128	-	129	58	100	97	127	-	128	-	129
16	46	76	76	99	110	119	-	121	48	88	81	114	116	120	-	121
17			64	87	93	105	-	114	41	78	68	101	98	112	-	114
18			54	78	79	94	106	107			58	90	84	106	-	107
19			46	70	68	84	91	98			49	80	72	98	96	102
20			40	63	58	76	79	88			43	73	62	88	83	97
21					51	69	68	80					54	80	73	92
22					44	63	60	73					47	73	64	84
23							53	67					41	67	56	76
24							47	61							49	70
25							41	56							44	65
26																
27																
28																
29																
30																

- Total Load values are limited by shear, moment, or deflection equal to L/240.
- Live Load values are limited by deflection equal to L/480. For deflection limits of L/360 and L/960, multiply the Live Load values by 1.33 and 0.50 respectively.
- Both the Total Load and Live Load columns must be checked. Where a Live Load value is not shown, the Total Load value will control.
- Table values apply to either simple or multiple span joists. Span is measured center to center of the minimum required bearing length. Analyze multiple span joists with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Table values do not consider composite action from gluing and nailing floor sheathing (composite action is considered in floor span tables on page 4).
- Total Load values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.
- For assistance with floor design, consult the section *About Floor Performance* on page 4.
- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.

Allowable Uniform Floor Load

(in pounds per linear foot [PLF])

100% Load Duration

Span Length	AJS® 20 Series 2½" Flange Width								AJS® 190 Series 2½" Flange Width							
	9½" AJS® 20		11⅞" AJS® 20		14" AJS® 20		16" AJS® 20		9½" AJS® 190		11⅞" AJS® 190		14" AJS® 190		16" AJS® 190	
	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load
6	-	313	-	318	-	320	-	323	-	313	-	318	-	320	-	323
7	-	268	-	272	-	274	-	277	-	268	-	272	-	274	-	277
8	-	235	-	238	-	240	-	242	-	235	-	238	-	240	-	242
9	-	208	-	212	-	213	-	215	-	208	-	212	-	213	-	215
10	-	188	-	191	-	192	-	194	-	188	-	191	-	192	-	194
11	161	170	-	173	-	174	-	176	168	170	-	173	-	174	-	176
12	128	156	-	159	-	160	-	161	133	156	-	159	-	160	-	161
13	102	144	-	146	-	147	-	149	107	144	-	146	-	147	-	149
14	83	134	-	136	-	137	-	138	87	134	-	136	-	137	-	138
15	69	120	113	127	-	128	-	129	72	125	118	127	-	128	-	129
16	57	106	95	119	-	120	-	121	60	117	99	119	-	120	-	121
17	48	93	80	112	-	112	-	114	50	101	83	112	-	112	-	114
18	41	82	68	106	98	106	-	107	43	86	71	106	102	106	-	107
19			58	97	84	101	-	102			61	100	88	101	-	102
20			50	88	73	96	-	97			53	95	76	96	-	97
21			44	79	63	91	85	92			46	90	66	91	89	92
22					55	87	74	88			40	80	58	87	78	88
23					49	80	65	84					51	83	69	84
24					43	73	58	80					45	80	61	80
25							51	77					40	76	54	77
26							46	72							48	74
27							41	67							43	71
28																
29																
30																

- Total Load values are limited by shear, moment, or deflection equal to $L/240$.
- Live Load values are limited by deflection equal to $L/480$. For deflection limits of $L/360$ and $L/960$, multiply the Live Load values by 1.33 and 0.50 respectively.
- Both the Total Load and Live Load columns must be checked. Where a Live Load value is not shown, the Total Load value will control.
- Table values apply to either simple or multiple span joists. Span is measured center to center of the minimum required bearing length. Analyze multiple span joists with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Table values do not consider composite action from gluing and nailing floor sheathing (composite action is considered in floor span tables on page 4).
- Total Load values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.
- For assistance with floor design, consult the section *About Floor Performance* on page 4.
- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.


Allowable Uniform Floor Load (in pounds per linear foot [PLF])

100% Load Duration

Span Length	AJS® 25 Series 3½" Flange Width							
	9½" AJS® 25		11⅞" AJS® 25		14" AJS® 25		16" AJS® 25	
	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load	Live Load	Total Load
6	-	316	-	318	-	320	-	323
7	-	271	-	272	-	274	-	277
8	-	237	-	238	-	240	-	242
9	-	211	-	212	-	213	-	215
10	-	190	-	191	-	192	-	194
11	-	172	-	173	-	174	-	176
12	-	158	-	159	-	160	-	161
13	136	146	-	146	-	147	-	149
14	111	135	-	136	-	137	-	138
15	92	126	-	127	-	128	-	129
16	77	118	-	119	-	120	-	121
17	65	111	107	112	-	112	-	114
18	55	105	91	106	-	106	-	107
19	47	95	78	100	-	101	-	102
20	41	82	68	95	-	96	-	97
21			59	90	85	91	-	92
22			52	86	74	87	-	88
23			46	83	66	83	-	84
24			40	79	58	80	78	80
25					52	76	69	77
26					46	73	62	74
27					41	71	56	71
28							50	69
29							45	66
30							41	64



AJS® Rafter

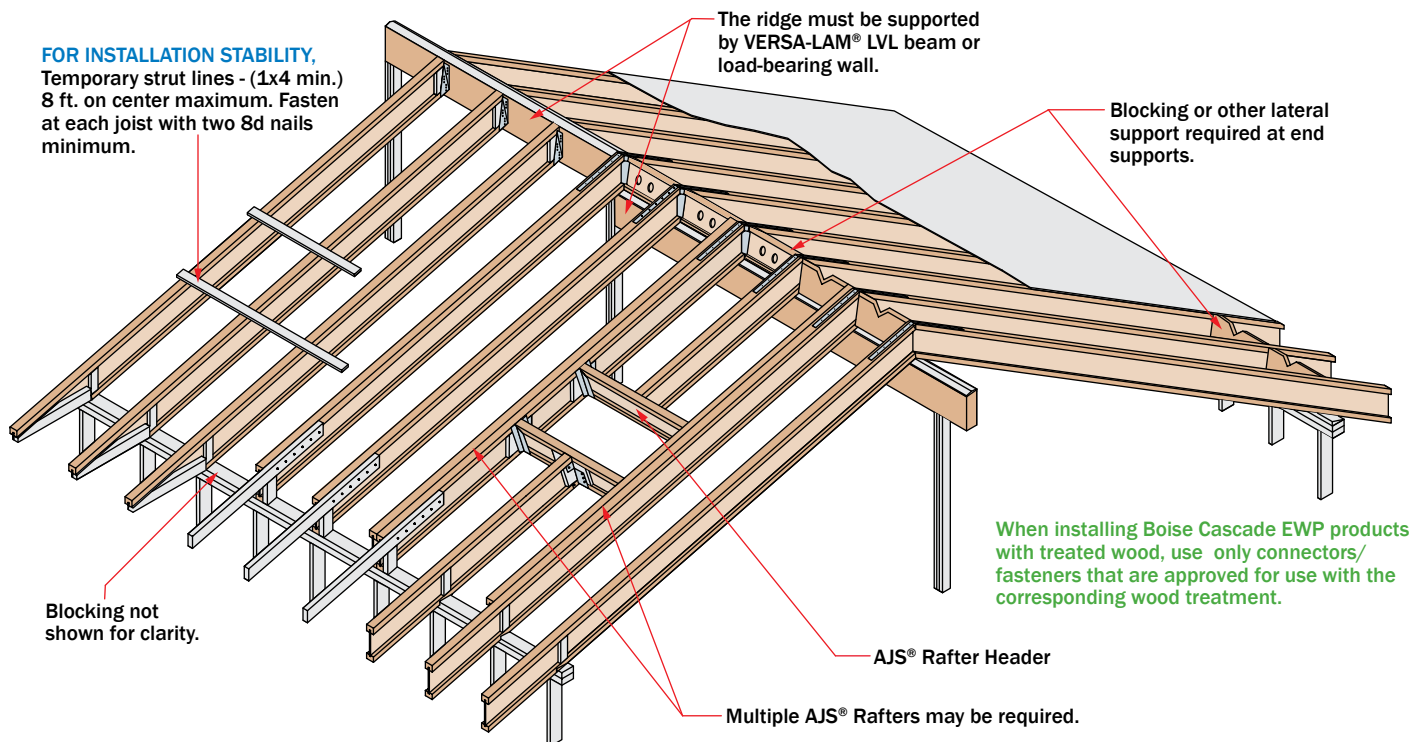

SAFETY WARNING

DO NOT ALLOW WORKERS ON AJS® JOISTS UNTIL ALL HANGERS, AJS® RIM JOISTS, RIM BOARDS, AJS® BLOCKING PANELS, X-BRACING AND TEMPORARY 1x4 STRUT LINES ARE INSTALLED AS SPECIFIED BELOW.


SERIOUS ACCIDENTS CAN RESULT FROM INSUFFICIENT ATTENTION TO PROPER BRACING DURING CONSTRUCTION. ACCIDENTS CAN BE AVOIDED UNDER NORMAL CONDITIONS BY FOLLOWING THESE GUIDELINES:

- Build a braced end wall at the end of the bay, or permanently install the first eight feet of AJS® Joists and the first course of sheathing. As an alternate, temporary sheathing may be nailed to the first four feet of AJS® Joists at the end of the bay.
- All hangers, AJS® rim joists, rim boards, AJS® blocking panels, and x-bracing must be completely installed and properly nailed as each AJS® Joist is set.
- Install temporary 1x4 strut lines at no more than eight feet on center as additional AJS® Joists are set. Nail the strut lines to the sheathed area, or braced end wall, and to each AJS® Joist with two 8d nails.

- The ends of cantilevers must be temporarily secured by strut lines on both the top and bottom flanges.
- Straighten the AJS® Joist to within ½ inch of true alignment before attaching strut lines and sheathing.
- Remove the temporary strut lines only as required to install the permanent sheathing.
- Failure to install temporary bracing may result in sideways buckling or roll-over under light construction loads.

AJS® Ceiling Joist with Bevel End Cut (For Limited-Access Attics Only)

AJS® Joist shall not be used as collar/tension tie. Roof rafter shall be supported by ridge beam or other upper bearing support.

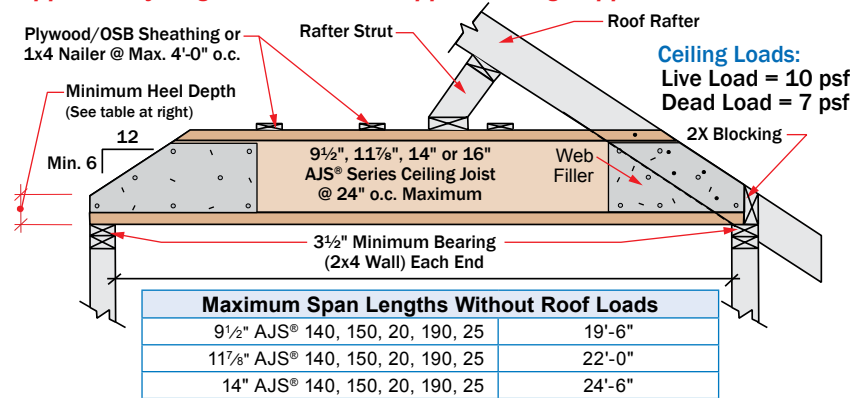

If roof loads transfer to ceiling joists through struts, analyze with BC CALC® software, not exceeding end reaction limit stated in Note 3 (see right).

Minimum Heel Depths	Joist Depth	End Wall	
		2 x 4	2 x 6
	9½"	2½"	1½"
	11⅞"	3½"	2½"
	14"	4½"	3½"

Notes:

- Detail is to be used only for ceiling joists with no access to attic space.
- Ceiling joist must be designed to carry all roof load transferred through rafter struts as shown.
- AJS® ceiling joist end reaction may not exceed 550 pounds.
- Minimum roof slope is 6/12.
- Nail roof rafter to AJS® top flange with 1-16d sinker or box nail.
- 1x4 nails shall be continuous and nailed to an end wall braced to the roof diaphragm.
- Install a 24" long web stiffener on each side of AJS® Joist at beveled ends. Nail roof rafter to AJS® Joist per building code requirements for ceiling joist to roof rafter connection.

Additional roof framing details available with BC FRAMER® software (see page 35)

R01

2x beveled plate for slope greater than 1/4/12.

Simpson VPA or USP TMP connectors or equal can be used in lieu of beveled plate for slopes from 3/12 to 12/12.

R04

10d nails at 6" o.c.

2x4 one side for 135 PLF max.
2x6 one side for 240 PLF max.

Backer block. Thickness per corresponding AJS® series.

2x block

AJS® blocking. Holes cut for ventilation.

4'-0" horiz.

2'-6" horiz.

R02

Rimboard / VERSA-LAM® blocking. Ventilation "V" cut: 1/3 of length, 1/2 of depth

2x4 blocking for soffit support.

2'-6" max.

Flange of AJS® Joists may be birdsmouth cut only at the low end of the joist. Birds-mouth cut AJS® joist must bear fully on plate, web stiffener required each side. Bottom flange shall be fully supported.

DN05

DO NOT bevel-cut joist beyond inside face of wall, except for specific conditions in details shown on pages 6 and 15 of the ALLJOIST® Specifier Guide.

R03

Rimboard / VERSA-LAM® blocking. Ventilation "V" cut: 1/3 of length, 1/2 of depth

Tight fit for lateral stability.

Flange of AJS® Joists may be birdsmouth cut only at the low end of the joist. Birds-mouth cut AJS® Joist must bear fully on plate, web stiffener required each side.

2'-6" max.

R07

Backer block (minimum 12" wide). Nail with 10-10d nails.

Joist Hanger

Filler block. Nail with 10-10d nails.

Backer block required where top flange joist hanger load exceeds 250 lbs. Install tight to top flange.

R05

Simpson or USP LSTA24 strap, nailing per governing building code.

AJS® Blocking: Row on each side of ridge or alternate. Holes cut for ventilation.

VERSA-LAM® LVL support beam.

Double-beveled plate, connect to ridge with 2 rows 16d nails at 12" o.c.

R06

Simpson or USP LSTA24 strap where slope exceeds 7/12 (straps may be required for lower slopes in high-wind areas). Nailing per governing building code.

VERSA-LAM® LVL support beam.

Beveled web stiffener on each side.

Simpson LSSUI or USP TMU hanger.

R11

Double joist may be required when L exceeds rafter spacing.

Blocking as required.

Nail outrigger through AJS® web.

2" x _ outrigger notched around AJS® top flange. Outrigger spacing no greater than 24" on-center.

End Wall.

L (2'-0" max.)

LATERAL SUPPORT

- AJS® Joists must be laterally supported at the ends with hangers, AJS® rim joists, rim boards, AJS® blocking panels or x-bracing. AJS® blocking panels or x-bracing are required at cantilever supports.
- Blocking may be required at intermediate bearings for floor diaphragm per IRC in high seismic areas, consult local building official.

MINIMUM BEARING LENGTH FOR AJS® JOISTS

- 1½ inches is required at end supports. 3½ inches is required at cantilever and intermediate supports.
- Longer bearing lengths allow higher reaction values. Refer to the building code evaluation report or the BC CALC® software.

NAILING REQUIREMENTS

- AJS® rim joist, rim board or closure panel to AJS® Joist:
 - Rims or closure panel 1¼ inches thick and less: 2-8d nails, one each in the top and bottom flange.
 - AJS® 140/150/20/190 rim joist: 2-16d box nails, one each in the top and bottom flange.
 - AJS® 25 rim joist: Toe-nail top flange to rim joist with 2-10d box nails, one each side of flange.
- AJS® rim joist, rim board or AJS® blocking panel to support:
 - 8d nails at 6 inches on center.
 - When used for shear transfer, follow the building designer's specification.

• AJS® Joist to support:

- 2-8d nails, one on each side of the web, placed 1½ inches minimum from the end of the AJS® Joist to limit splitting.
- Sheathing to AJS® joist, rim joist, blocking:
 - Prescriptive residential roof sheathing nailing requires 8d common nails @ 6" o.c. on edges and @ 12" o.c. in the field IRC Table R602.3(1). Closer nail spacing may be required per design professional of record.
 - 14 gauge staples may be substituted for 8d nails if the staples penetrate at least 1 inch into the joist.
 - Wood screws may be acceptable, contact local building official and/or Boise Cascade EWP Engineering for further information.

BACKER AND FILLER BLOCK DIMENSIONS

AJS® Series	Backer Block Thickness	Filler Block Thickness
140	1½" or two ½" wood panels	2x _ + ⅝" wood panel
150		
20		
190	2 x _ lumber	Double 2 x _ lumber
25		

- Cut backer and filler blocks to a maximum depth equal to the web depth minus ¼" to avoid a forced fit.
- For deeper AJS® Joists, stack 2x lumber or use multiple pieces of ¾" wood panels.

WEB STIFFENER REQUIREMENTS

- See *Web Stiffener Requirements* on page 10.

PROTECT AJS® JOISTS FROM THE WEATHER

- AJS® Joists are intended only for applications that provide permanent protection from the weather. Bundles of AJS® Joists should be covered and stored off of the ground on stickers.

MAXIMUM SLOPE

- Unless otherwise noted, all roof details are valid for slopes of 12 in 12 or less.

VENTILATION

- The 1½ inch, pre-stamped knock-out holes spaced at 12 inches on center along the AJS® Joist may all be knocked out and used for cross ventilation. Deeper joists than what is structurally needed may be advantageous in ventilation design. Consult local building official and/or ventilation specialist for specific ventilation requirements.

BIRDSMOUTH CUTS

- AJS® Joists may be birdsmouth cut only at the low end support. AJS® Joists with birdsmouth cuts may cantilever up to 2'-6" past the low end support. The bottom flange must sit fully on the support and may not overhang the inside face of the support. High end supports and intermediate supports may not be birdsmouth cut.

Roof Span Tables

Maximum clear span in feet and inches, based on horizontal spans.

115% and 125% Load Duration

				AJS® 140 Series 2½" Flange Width											
				9½" AJS® 140			11¼" AJS® 140			14" AJS® 140			16" AJS® 140		
		Live Load [psf]	Dead Load [psf]	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12
12" o.c.	Non-Snow 125%	20	10	25'-2"	23'-9"	22'-0"	30'-1"	28'-5"	26'-4"	34'-4"	32'-4"	30'-0"	37'-10"	35'-11"	33'-4"
		20	15	23'-10"	22'-5"	20'-8"	28'-6"	26'-9"	24'-9"	32'-5"	30'-6"	28'-2"	34'-11"	33'-10"	31'-3"
		20	20	22'-9"	21'-4"	19'-7"	27'-3"	25'-6"	23'-5"	30'-3"	29'-0"	26'-8"	32'-7"	31'-6"	29'-7"
	Snow 115%	25	10	23'-11"	22'-7"	21'-0"	28'-5"	27'-0"	25'-2"	31'-2"	30'-7"	28'-8"	33'-7"	32'-11"	31'-10"
		25	15	22'-10"	21'-6"	19'-10"	26'-6"	25'-8"	23'-9"	29'-1"	28'-4"	27'-1"	31'-4"	30'-6"	29'-5"
		30	10	22'-10"	21'-8"	20'-2"	26'-7"	25'-11"	24'-2"	29'-2"	28'-8"	27'-6"	31'-6"	30'-11"	30'-2"
		30	15	21'-11"	20'-8"	19'-2"	25'-0"	24'-5"	22'-11"	27'-5"	26'-10"	25'-11"	29'-7"	28'-11"	28'-0"
		40	10	20'-10"	19'-11"	18'-10"	23'-9"	23'-5"	22'-6"	26'-2"	25'-9"	25'-3"	28'-2"	27'-9"	27'-2"
		40	15	19'-10"	19'-4"	18'-1"	22'-7"	22'-2"	21'-7"	24'-10"	24'-4"	23'-9"	26'-9"	26'-3"	25'-7"
		50	10	19'-0"	18'-6"	17'-6"	21'-8"	21'-5"	21'-0"	23'-10"	23'-7"	23'-2"	25'-8"	25'-5"	25'-0"
		50	15	18'-3"	17'-11"	17'-2"	20'-10"	20'-6"	20'-0"	22'-10"	22'-6"	22'-0"	24'-8"	24'-3"	23'-8"
16" o.c.	Non-Snow 125%	20	10	22'-10"	21'-6"	20'-0"	27'-4"	25'-9"	23'-11"	30'-5"	29'-4"	27'-3"	32'-9"	32'-0"	30'-3"
		20	15	21'-7"	20'-3"	18'-9"	25'-6"	24'-3"	22'-5"	28'-1"	27'-2"	25'-6"	30'-3"	29'-4"	28'-2"
		20	20	20'-7"	19'-3"	17'-9"	23'-10"	23'-0"	21'-3"	26'-2"	25'-3"	24'-1"	28'-2"	27'-3"	26'-0"
	Snow 115%	25	10	21'-7"	20'-6"	19'-1"	24'-7"	24'-1"	22'-10"	27'-0"	26'-5"	25'-8"	29'-1"	28'-6"	27'-8"
		25	15	20'-1"	19'-5"	18'-0"	22'-11"	22'-4"	21'-6"	25'-2"	24'-6"	23'-8"	27'-1"	26'-5"	25'-6"
		30	10	20'-2"	19'-7"	18'-3"	23'-0"	22'-7"	21'-11"	25'-3"	24'-10"	24'-2"	27'-3"	26'-9"	26'-1"
		30	15	18'-11"	18'-6"	17'-5"	21'-7"	21'-1"	20'-5"	23'-9"	23'-2"	22'-5"	25'-7"	25'-0"	24'-2"
		40	10	18'-0"	17'-9"	17'-1"	20'-7"	20'-3"	19'-10"	22'-7"	22'-3"	21'-10"	24'-4"	24'-0"	23'-6"
		40	15	17'-2"	16'-10"	16'-4"	19'-7"	19'-2"	18'-8"	21'-6"	21'-1"	20'-6"	23'-2"	22'-8"	22'-1"
		50	10	16'-5"	16'-3"	15'-10"	18'-9"	18'-6"	18'-3"	20'-7"	20'-4"	20'-0"	22'-3"	21'-11"	21'-7"
		50	15	15'-9"	15'-6"	15'-2"	18'-0"	17'-8"	17'-3"	19'-9"	19'-5"	19'-0"	21'-4"	20'-11"	20'-6"
19.2" o.c.	Non-Snow 125%	20	10	21'-5"	20'-3"	18'-9"	25'-3"	24'-2"	22'-5"	27'-9"	27'-1"	25'-7"	29'-10"	29'-2"	28'-3"
		20	15	20'-3"	19'-1"	17'-7"	23'-3"	22'-7"	21'-1"	25'-7"	24'-10"	23'-10"	27'-7"	26'-9"	25'-8"
		20	20	19'-1"	18'-1"	16'-8"	21'-9"	21'-0"	19'-11"	23'-10"	23'-0"	22'-0"	25'-9"	24'-10"	23'-8"
	Snow 115%	25	10	19'-8"	19'-3"	17'-11"	22'-5"	21'-11"	21'-4"	24'-7"	24'-1"	23'-5"	26'-6"	26'-0"	25'-3"
		25	15	18'-4"	17'-10"	16'-11"	20'-11"	20'-4"	19'-7"	22'-11"	22'-4"	21'-7"	24'-9"	24'-1"	23'-3"
		30	10	18'-5"	18'-1"	17'-2"	21'-0"	20'-7"	20'-1"	23'-0"	22'-7"	22'-1"	24'-10"	24'-5"	23'-9"
		30	15	17'-3"	16'-10"	16'-4"	19'-8"	19'-3"	18'-7"	21'-8"	21'-2"	20'-6"	23'-4"	22'-9"	22'-1"
		40	10	16'-5"	16'-2"	15'-10"	18'-9"	18'-6"	18'-1"	20'-7"	20'-4"	19'-11"	22'-2"	21'-11"	21'-5"
		40	15	15'-8"	15'-4"	14'-11"	17'-10"	17'-6"	17'-0"	19'-7"	19'-2"	18'-8"	21'-1"	20'-8"	20'-2"
		50	10	15'-0"	14'-10"	14'-7"	17'-1"	16'-11"	16'-7"	18'-10"	18'-7"	18'-3"	20'-3"	20'-0"	19'-8"
		50	15	14'-4"	14'-2"	13'-10"	16'-5"	16'-1"	15'-9"	18'-0"	17'-9"	17'-4"	19'-5"	19'-1"	18'-8"
24" o.c.	Non-Snow 125%	20	10	19'-9"	18'-9"	17'-5"	22'-6"	22'-0"	20'-10"	24'-9"	24'-2"	23'-5"	26'-8"	26'-1"	25'-3"
		20	15	18'-3"	17'-8"	16'-3"	20'-10"	20'-2"	19'-4"	22'-10"	22'-2"	21'-3"	24'-7"	23'-11"	22'-11"
		20	20	17'-0"	16'-5"	15'-5"	19'-5"	18'-9"	17'-10"	21'-4"	20'-7"	19'-8"	23'-0"	22'-2"	21'-2"
	Snow 115%	25	10	17'-7"	17'-2"	16'-7"	20'-0"	19'-7"	19'-1"	22'-0"	21'-6"	20'-11"	23'-8"	23'-3"	22'-7"
		25	15	16'-4"	15'-11"	15'-4"	18'-8"	18'-2"	17'-6"	20'-6"	20'-0"	19'-3"	22'-1"	21'-6"	20'-9"
		30	10	16'-5"	16'-1"	15'-9"	18'-9"	18'-5"	17'-11"	20'-7"	20'-2"	19'-8"	22'-2"	21'-9"	21'-3"
		30	15	15'-5"	15'-1"	14'-7"	17'-7"	17'-2"	16'-8"	19'-4"	18'-11"	18'-3"	20'-10"	20'-4"	19'-8"
		40	10	14'-8"	14'-6"	14'-2"	16'-9"	16'-6"	16'-2"	18'-5"	18'-2"	17'-9"	19'-10"	19'-7"	19'-2"
		40	15	13'-11"	13'-8"	13'-4"	15'-11"	15'-7"	15'-2"	17'-6"	17'-2"	16'-8"	18'-10"	18'-6"	18'-0"
		50	10	13'-5"	13'-3"	13'-0"	15'-3"	15'-1"	14'-10"	16'-9"	16'-7"	16'-4"	18'-1"	17'-11"	17'-5"
		50	15	12'-10"	12'-7"	12'-4"	14'-8"	14'-5"	14'-1"	16'-1"	15'-10"	15'-5"	17'-0"	16'-5"	15'-8"

• Table values are limited by shear, moment, total load deflection equal to L/180 and live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.

• Table values represent the most restrictive of simple or multiple span applications. Analyze multiple span joists with the BC Calc software if the length of any span is less than half the length of an adjacent span.

• Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.

• This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.

• Slope roof joists at least ¼" over 12" to minimize ponding.

• Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Maximum clear span in feet and inches, based on horizontal spans.

115% and 125% Load Duration

				AJS® 150 Series 2½" Flange Width											
				9½" AJS® 150			11⅞" AJS® 150			14" AJS® 150			16" AJS® 150		
		Live Load [psf]	Dead Load [psf]	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12
12" o.c.	Non-Snow 125%	20	10	25'-9"	24'-3"	22'-6"	30'-9"	29'-0"	26'-11"	35'-1"	33'-1"	30'-8"	38'-11"	36'-8"	34'-0"
		20	15	24'-4"	22'-10"	21'-1"	29'-2"	27'-5"	25'-3"	33'-2"	31'-2"	28'-9"	36'-10"	34'-7"	31'-11"
		20	20	23'-3"	21'-9"	20'-0"	27'-10"	26'-0"	23'-11"	31'-8"	29'-8"	27'-3"	34'-11"	32'-11"	30'-3"
	Snow 115%	25	10	24'-5"	23'-1"	21'-6"	29'-3"	27'-8"	25'-9"	33'-3"	31'-6"	29'-3"	36'-0"	34'-11"	32'-6"
		25	15	23'-3"	21'-11"	20'-4"	27'-11"	26'-3"	24'-4"	31'-2"	29'-11"	27'-8"	33'-7"	32'-9"	30'-9"
		30	10	23'-4"	22'-1"	20'-7"	27'-11"	26'-6"	24'-8"	31'-4"	30'-2"	28'-1"	33'-9"	33'-1"	31'-2"
		30	15	22'-5"	21'-1"	19'-7"	26'-10"	25'-3"	23'-6"	29'-5"	28'-9"	26'-9"	31'-9"	31'-0"	29'-8"
		40	10	21'-3"	20'-4"	19'-3"	25'-5"	24'-5"	23'-0"	28'-0"	27'-7"	26'-3"	30'-2"	29'-9"	29'-1"
		40	15	20'-11"	19'-9"	18'-5"	24'-3"	23'-8"	22'-1"	26'-8"	26'-1"	25'-2"	28'-8"	28'-2"	27'-5"
		50	10	19'-8"	18'-10"	17'-11"	23'-3"	22'-7"	21'-5"	25'-7"	25'-3"	24'-5"	27'-7"	27'-3"	26'-9"
50	15	19'-7"	18'-9"	17'-6"	22'-4"	21'-11"	21'-0"	24'-6"	24'-1"	23'-7"	26'-5"	26'-0"	25'-5"		
16" o.c.	Non-Snow 125%	20	10	23'-4"	22'-0"	20'-5"	27'-11"	26'-4"	24'-5"	31'-9"	30'-0"	27'-10"	35'-1"	33'-3"	30'-10"
		20	15	22'-1"	20'-9"	19'-2"	26'-5"	24'-10"	22'-11"	30'-1"	28'-3"	26'-1"	32'-5"	31'-4"	28'-11"
		20	20	21'-1"	19'-8"	18'-1"	25'-2"	23'-7"	21'-8"	28'-1"	26'-11"	24'-9"	30'-3"	29'-2"	27'-5"
	Snow 115%	25	10	22'-1"	20'-11"	19'-6"	26'-4"	25'-1"	23'-4"	28'-11"	28'-4"	26'-7"	31'-2"	30'-6"	29'-6"
		25	15	21'-1"	19'-10"	18'-5"	24'-7"	23'-9"	22'-0"	27'-0"	26'-3"	25'-1"	29'-1"	28'-4"	27'-4"
		30	10	21'-2"	20'-0"	18'-8"	24'-8"	24'-0"	22'-4"	27'-1"	26'-7"	25'-6"	29'-2"	28'-8"	27'-11"
		30	15	20'-3"	19'-1"	17'-9"	23'-2"	22'-8"	21'-3"	25'-5"	24'-10"	24'-1"	27'-5"	26'-9"	25'-11"
		40	10	19'-3"	18'-5"	17'-5"	22'-1"	21'-9"	20'-10"	24'-3"	23'-10"	23'-5"	26'-1"	25'-9"	25'-3"
		40	15	18'-5"	17'-11"	16'-8"	21'-0"	20'-7"	20'-0"	23'-0"	22'-7"	22'-0"	24'-10"	24'-4"	23'-8"
		50	10	17'-8"	17'-1"	16'-3"	20'-2"	19'-11"	19'-5"	22'-1"	21'-10"	21'-6"	23'-10"	23'-6"	23'-2"
50	15	16'-11"	16'-8"	15'-10"	19'-4"	19'-0"	18'-7"	21'-2"	20'-10"	20'-4"	22'-10"	22'-6"	21'-11"		
19.2" o.c.	Non-Snow 125%	20	10	21'-11"	20'-8"	19'-2"	26'-3"	24'-9"	22'-11"	29'-9"	28'-2"	26'-2"	32'-0"	31'-3"	29'-0"
		20	15	20'-9"	19'-6"	18'-0"	24'-10"	23'-4"	21'-6"	27'-5"	26'-7"	24'-6"	29'-7"	28'-8"	27'-2"
		20	20	19'-9"	18'-6"	17'-0"	23'-4"	22'-2"	20'-5"	25'-7"	24'-8"	23'-3"	27'-7"	26'-7"	25'-5"
	Snow 115%	25	10	20'-9"	19'-8"	18'-3"	24'-0"	23'-6"	21'-11"	26'-5"	25'-10"	24'-11"	28'-5"	27'-10"	27'-1"
		25	15	19'-8"	18'-8"	17'-3"	22'-5"	21'-10"	20'-8"	24'-7"	24'-0"	23'-1"	26'-6"	25'-10"	24'-11"
		30	10	19'-9"	18'-10"	17'-7"	22'-6"	22'-1"	21'-0"	24'-8"	24'-3"	23'-8"	26'-7"	26'-2"	25'-6"
		30	15	18'-7"	17'-11"	16'-8"	21'-2"	20'-8"	20'-0"	23'-3"	22'-8"	21'-11"	25'-0"	24'-5"	23'-8"
		40	10	17'-8"	17'-4"	16'-4"	20'-1"	19'-10"	19'-5"	22'-1"	21'-9"	21'-4"	23'-10"	23'-6"	23'-0"
		40	15	16'-9"	16'-5"	15'-8"	19'-2"	18'-9"	18'-3"	21'-0"	20'-7"	20'-1"	22'-8"	22'-2"	21'-7"
		50	10	16'-1"	15'-11"	15'-3"	18'-4"	18'-2"	17'-10"	20'-2"	19'-11"	19'-7"	21'-9"	21'-6"	21'-1"
50	15	15'-5"	15'-2"	14'-10"	17'-7"	17'-4"	16'-11"	19'-4"	19'-0"	18'-7"	20'-10"	20'-6"	19'-8"		
24" o.c.	Non-Snow 125%	20	10	20'-3"	19'-1"	17'-9"	24'-2"	22'-11"	21'-3"	26'-7"	25'-11"	24'-3"	28'-7"	27'-11"	26'-11"
		20	15	19'-2"	18'-0"	16'-8"	22'-4"	21'-7"	19'-11"	24'-6"	23'-9"	22'-8"	26'-5"	25'-7"	24'-7"
		20	20	18'-3"	17'-2"	15'-9"	20'-10"	20'-1"	18'-10"	22'-10"	22'-1"	21'-1"	24'-8"	23'-9"	22'-8"
	Snow 115%	25	10	18'-10"	18'-2"	16'-11"	21'-6"	21'-0"	20'-3"	23'-7"	23'-1"	22'-5"	25'-5"	24'-11"	24'-2"
		25	15	17'-7"	17'-1"	16'-0"	20'-0"	19'-6"	18'-10"	22'-0"	21'-5"	20'-8"	23'-8"	23'-1"	22'-3"
		30	10	17'-8"	17'-4"	16'-3"	20'-1"	19'-9"	19'-3"	22'-1"	21'-8"	21'-2"	23'-9"	23'-4"	22'-9"
		30	15	16'-7"	16'-2"	15'-5"	18'-11"	18'-5"	17'-10"	20'-9"	20'-3"	19'-7"	22'-4"	21'-10"	21'-1"
		40	10	15'-9"	15'-6"	15'-2"	18'-0"	17'-8"	17'-4"	19'-9"	19'-5"	19'-1"	21'-3"	20'-11"	20'-6"
		40	15	15'-0"	14'-8"	14'-4"	17'-1"	16'-9"	16'-4"	18'-9"	18'-5"	17'-11"	20'-1"	19'-3"	18'-3"
		50	10	14'-5"	14'-2"	14'-0"	16'-5"	16'-2"	15'-11"	18'-0"	17'-9"	17'-2"	18'-6"	18'-0"	17'-5"
50	15	13'-9"	13'-7"	13'-3"	15'-9"	15'-5"	15'-1"	16'-9"	16'-2"	15'-5"	17'-0"	16'-5"	15'-8"		

- Table values are limited by shear, moment, total load deflection equal to L/180 and live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.
- Table values represent the most restrictive of simple or multiple span applications. Analyze multiple span joists with the BC Calc software if the length of any span is less than half the length of an adjacent span.
- Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.
- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.
- Slope roof joists at least ¼" over 12" to minimize ponding.
- Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Roof Span Tables

Maximum clear span in feet and inches, based on horizontal spans.

115% and 125% Load Duration

				AJS® 20 Series 2½" Flange Width											
				9½" AJS® 20			11¼" AJS® 20			14" AJS® 20			16" AJS® 20		
		Live Load [psf]	Dead Load [psf]	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12
12" o.c.	Non-Snow 125%	20	10	27'-4"	25'-9"	23'-11"	32'-7"	30'-9"	28'-7"	37'-1"	35'-0"	32'-6"	41'-2"	38'-10"	36'-0"
		20	15	25'-10"	24'-3"	22'-5"	30'-11"	29'-0"	26'-9"	35'-2"	33'-0"	30'-5"	39'-0"	36'-7"	33'-9"
		20	20	24'-8"	23'-1"	21'-3"	29'-6"	27'-7"	25'-4"	33'-6"	31'-5"	28'-10"	37'-2"	34'-10"	32'-0"
	Snow 115%	25	10	25'-11"	24'-6"	22'-10"	31'-0"	29'-3"	27'-3"	35'-3"	33'-4"	31'-0"	39'-1"	36'-11"	34'-4"
		25	15	24'-9"	23'-3"	21'-6"	29'-7"	27'-10"	25'-9"	33'-7"	31'-8"	29'-4"	36'-11"	35'-1"	32'-6"
		30	10	24'-9"	23'-6"	21'-11"	29'-7"	28'-0"	26'-2"	33'-8"	31'-11"	29'-9"	37'-1"	35'-4"	33'-0"
		30	15	23'-9"	22'-5"	20'-10"	28'-5"	26'-9"	24'-10"	32'-4"	30'-6"	28'-3"	34'-10"	33'-10"	31'-4"
		40	10	22'-6"	21'-7"	20'-5"	26'-11"	25'-10"	24'-5"	30'-8"	29'-5"	27'-9"	33'-2"	32'-7"	30'-9"
		40	15	22'-2"	21'-0"	19'-7"	26'-6"	25'-1"	23'-5"	29'-3"	28'-7"	26'-7"	31'-7"	30'-11"	29'-6"
		50	10	20'-10"	20'-0"	19'-0"	24'-11"	23'-11"	22'-9"	28'-1"	27'-3"	25'-10"	30'-3"	29'-11"	28'-8"
		50	15	20'-10"	19'-11"	18'-7"	24'-6"	23'-9"	22'-3"	26'-11"	26'-6"	25'-3"	29'-0"	28'-7"	27'-11"
16" o.c.	Non-Snow 125%	20	10	24'-9"	23'-4"	21'-8"	29'-7"	27'-11"	25'-11"	33'-8"	31'-9"	29'-5"	37'-4"	35'-2"	32'-8"
		20	15	23'-5"	22'-0"	20'-4"	28'-0"	26'-4"	24'-3"	31'-10"	29'-11"	27'-7"	35'-4"	33'-2"	30'-7"
		20	20	22'-4"	20'-11"	19'-3"	26'-8"	25'-0"	23'-0"	30'-5"	28'-5"	26'-2"	33'-3"	31'-7"	29'-0"
	Snow 115%	25	10	23'-6"	22'-2"	20'-8"	28'-1"	26'-6"	24'-8"	31'-10"	30'-2"	28'-1"	34'-3"	33'-6"	31'-2"
		25	15	22'-5"	21'-1"	19'-6"	26'-9"	25'-2"	23'-4"	29'-8"	28'-8"	26'-7"	32'-0"	31'-1"	29'-5"
		30	10	22'-5"	21'-3"	19'-10"	26'-10"	25'-5"	23'-9"	29'-9"	28'-11"	27'-0"	32'-1"	31'-6"	29'-11"
		30	15	21'-6"	20'-4"	18'-10"	25'-6"	24'-3"	22'-6"	28'-0"	27'-4"	25'-8"	30'-2"	29'-5"	28'-5"
		40	10	20'-5"	19'-7"	18'-6"	24'-3"	23'-5"	22'-1"	26'-8"	26'-3"	25'-2"	28'-8"	28'-3"	27'-9"
		40	15	20'-1"	19'-0"	17'-9"	23'-1"	22'-7"	21'-2"	25'-4"	24'-10"	24'-1"	27'-3"	26'-9"	26'-1"
		50	10	18'-11"	18'-1"	17'-2"	22'-2"	21'-8"	20'-7"	24'-4"	24'-0"	23'-5"	26'-2"	25'-11"	25'-5"
		50	15	18'-7"	18'-0"	16'-10"	21'-3"	20'-10"	20'-1"	23'-4"	22'-11"	22'-5"	25'-1"	24'-8"	23'-7"
19.2" o.c.	Non-Snow 125%	20	10	23'-3"	21'-11"	20'-4"	27'-9"	26'-2"	24'-4"	31'-7"	29'-10"	27'-8"	35'-1"	33'-1"	30'-8"
		20	15	22'-0"	20'-8"	19'-1"	26'-4"	24'-8"	22'-10"	29'-11"	28'-1"	25'-11"	32'-6"	31'-2"	28'-9"
		20	20	21'-0"	19'-8"	18'-1"	25'-1"	23'-6"	21'-7"	28'-1"	26'-9"	24'-7"	30'-4"	29'-3"	27'-3"
	Snow 115%	25	10	22'-1"	20'-10"	19'-5"	26'-4"	24'-11"	23'-3"	29'-0"	28'-4"	26'-5"	31'-3"	30'-7"	29'-3"
		25	15	21'-0"	19'-10"	18'-4"	24'-8"	23'-8"	21'-11"	27'-1"	26'-4"	24'-11"	29'-2"	28'-5"	27'-5"
		30	10	21'-1"	19'-11"	18'-8"	24'-9"	23'-10"	22'-3"	27'-2"	26'-8"	25'-4"	29'-3"	28'-9"	28'-0"
		30	15	20'-2"	19'-1"	17'-8"	23'-3"	22'-8"	21'-2"	25'-6"	24'-11"	24'-1"	27'-6"	26'-10"	26'-0"
		40	10	19'-2"	18'-5"	17'-4"	22'-1"	21'-10"	20'-9"	24'-3"	23'-11"	23'-5"	26'-2"	25'-9"	25'-3"
		40	15	18'-5"	17'-10"	16'-8"	21'-0"	20'-7"	19'-11"	23'-1"	22'-8"	22'-0"	24'-11"	24'-2"	22'-11"
		50	10	17'-8"	17'-0"	16'-2"	20'-2"	19'-11"	19'-4"	22'-2"	21'-11"	21'-6"	23'-2"	22'-7"	21'-10"
		50	15	17'-0"	16'-8"	15'-9"	19'-4"	19'-0"	18'-7"	21'-0"	20'-3"	19'-4"	21'-3"	20'-7"	19'-8"
24" o.c.	Non-Snow 125%	20	10	21'-6"	20'-4"	18'-10"	25'-9"	24'-3"	22'-6"	29'-2"	27'-7"	25'-8"	31'-5"	30'-8"	28'-5"
		20	15	20'-4"	19'-1"	17'-8"	24'-4"	22'-10"	21'-1"	26'-11"	26'-0"	24'-0"	29'-0"	28'-2"	26'-8"
		20	20	19'-5"	18'-2"	16'-9"	22'-11"	21'-9"	20'-0"	25'-2"	24'-3"	22'-9"	27'-1"	26'-2"	24'-11"
	Snow 115%	25	10	20'-5"	19'-4"	18'-0"	23'-7"	23'-1"	21'-6"	25'-11"	25'-5"	24'-6"	27'-11"	27'-4"	26'-7"
		25	15	19'-4"	18'-4"	17'-0"	22'-0"	21'-5"	20'-4"	24'-2"	23'-6"	22'-8"	26'-1"	25'-4"	24'-3"
		30	10	19'-4"	18'-6"	17'-3"	22'-1"	21'-8"	20'-8"	24'-3"	23'-10"	23'-3"	26'-2"	25'-8"	25'-0"
		30	15	18'-2"	17'-8"	16'-5"	20'-9"	20'-3"	19'-7"	22'-10"	22'-3"	21'-7"	24'-6"	23'-4"	21'-11"
		40	10	17'-4"	17'-0"	16'-1"	19'-9"	19'-6"	19'-1"	21'-8"	21'-3"	20'-5"	22'-2"	21'-6"	20'-8"
		40	15	16'-6"	16'-2"	15'-5"	18'-9"	18'-5"	17'-8"	19'-9"	19'-0"	18'-0"	20'-1"	19'-3"	18'-3"
		50	10	15'-10"	15'-7"	14'-11"	17'-11"	17'-6"	16'-11"	18'-2"	17'-9"	17'-2"	18'-6"	18'-0"	17'-5"
		50	15	15'-2"	14'-11"	14'-7"	16'-5"	15'-11"	15'-2"	16'-9"	16'-2"	15'-5"	17'-0"	16'-5"	15'-8"

• Table values are limited by shear, moment, total load deflection equal to L/180 and live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.

• Table values represent the most restrictive of simple or multiple span applications. Analyze multiple span joists with the BC Calc software if the length of any span is less than half the length of an adjacent span.

• Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.

• This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.

• Slope roof joists at least ¼" over 12" to minimize ponding.

• Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Maximum clear span in feet and inches, based on horizontal spans.

115% and 125% Load Duration

				AJS® 190 Series 2½" Flange Width											
				9½" AJS® 190			11⅞" AJS® 190			14" AJS® 190			16" AJS® 190		
				4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12
		Live Load [psf]	Dead Load [psf]												
12" o.c.	Non-Snow 125%	20	10	27'-9"	26'-2"	24'-3"	33'-2"	31'-3"	29'-0"	37'-9"	35'-7"	33'-0"	41'-10"	39'-6"	36'-7"
		20	15	26'-3"	24'-8"	22'-9"	31'-5"	29'-6"	27'-3"	35'-9"	33'-7"	31'-0"	39'-8"	37'-3"	34'-4"
		20	20	25'-1"	23'-6"	21'-7"	30'-0"	28'-1"	25'-9"	34'-1"	31'-11"	29'-4"	37'-10"	35'-5"	32'-7"
	Snow 115%	25	10	26'-4"	24'-11"	23'-2"	31'-6"	29'-9"	27'-8"	35'-10"	33'-10"	31'-6"	39'-9"	37'-7"	34'-11"
		25	15	25'-2"	23'-8"	21'-11"	30'-0"	28'-3"	26'-2"	34'-2"	32'-2"	29'-9"	37'-11"	35'-8"	33'-0"
		30	10	25'-2"	23'-10"	22'-3"	30'-1"	28'-6"	26'-7"	34'-3"	32'-5"	30'-3"	38'-0"	36'-0"	33'-7"
		30	15	24'-2"	22'-9"	21'-2"	28'-10"	27'-3"	25'-3"	32'-10"	31'-0"	28'-9"	36'-5"	34'-4"	31'-11"
		40	10	22'-11"	22'-0"	20'-9"	27'-5"	26'-3"	24'-10"	31'-2"	29'-11"	28'-3"	34'-7"	33'-2"	31'-4"
		40	15	22'-7"	21'-4"	19'-11"	27'-0"	25'-6"	23'-9"	30'-8"	29'-1"	27'-1"	33'-10"	32'-3"	30'-0"
		50	10	21'-3"	20'-4"	19'-4"	25'-4"	24'-4"	23'-1"	28'-11"	27'-8"	26'-3"	32'-0"	30'-9"	29'-2"
		50	15	21'-3"	20'-3"	18'-11"	25'-4"	24'-2"	22'-7"	28'-10"	27'-6"	25'-8"	31'-1"	30'-6"	28'-6"
16" o.c.	Non-Snow 125%	20	10	25'-2"	23'-9"	22'-0"	30'-1"	28'-4"	26'-4"	34'-2"	32'-3"	29'-11"	37'-11"	35'-9"	33'-2"
		20	15	23'-10"	22'-4"	20'-8"	28'-6"	26'-9"	24'-8"	32'-5"	30'-5"	28'-1"	35'-11"	33'-9"	31'-2"
		20	20	22'-9"	21'-3"	19'-7"	27'-2"	25'-5"	23'-4"	30'-11"	28'-11"	26'-7"	34'-3"	32'-1"	29'-6"
	Snow 115%	25	10	23'-10"	22'-7"	21'-0"	28'-6"	27'-0"	25'-1"	32'-6"	30'-8"	28'-7"	36'-0"	34'-1"	31'-8"
		25	15	22'-9"	21'-5"	19'-10"	27'-2"	25'-7"	23'-9"	31'-0"	29'-2"	27'-0"	34'-3"	32'-4"	29'-11"
		30	10	22'-10"	21'-7"	20'-2"	27'-3"	25'-10"	24'-1"	31'-0"	29'-5"	27'-5"	34'-4"	32'-7"	30'-5"
		30	15	21'-10"	20'-8"	19'-2"	26'-2"	24'-8"	22'-11"	29'-9"	28'-1"	26'-1"	32'-4"	31'-2"	28'-11"
		40	10	20'-9"	19'-11"	18'-10"	24'-10"	23'-10"	22'-6"	28'-3"	27'-1"	25'-7"	30'-9"	30'-1"	28'-5"
		40	15	20'-5"	19'-4"	18'-0"	24'-5"	23'-1"	21'-7"	27'-2"	26'-4"	24'-6"	29'-3"	28'-8"	27'-2"
		50	10	19'-2"	18'-5"	17'-6"	22'-11"	22'-0"	20'-11"	26'-1"	25'-1"	23'-10"	27'-10"	27'-2"	26'-3"
		50	15	19'-2"	18'-4"	17'-1"	22'-9"	21'-11"	20'-5"	25'-0"	24'-5"	23'-3"	25'-7"	24'-9"	23'-7"
19.2" o.c.	Non-Snow 125%	20	10	23'-7"	22'-3"	20'-8"	28'-3"	26'-8"	24'-9"	32'-2"	30'-4"	28'-2"	35'-8"	33'-7"	31'-3"
		20	15	22'-4"	21'-0"	19'-5"	26'-9"	25'-1"	23'-2"	30'-5"	28'-7"	26'-5"	33'-9"	31'-8"	29'-3"
		20	20	21'-4"	20'-0"	18'-4"	25'-6"	23'-10"	21'-11"	29'-0"	27'-2"	25'-0"	32'-2"	30'-2"	27'-9"
	Snow 115%	25	10	22'-5"	21'-2"	19'-9"	26'-10"	25'-4"	23'-7"	30'-6"	28'-10"	26'-10"	33'-6"	32'-0"	29'-9"
		25	15	21'-4"	20'-2"	18'-8"	25'-7"	24'-1"	22'-3"	29'-0"	27'-5"	25'-4"	31'-3"	30'-5"	28'-2"
		30	10	21'-5"	20'-4"	18'-11"	25'-7"	24'-3"	22'-8"	29'-1"	27'-7"	25'-9"	31'-4"	30'-8"	28'-7"
		30	15	20'-6"	19'-5"	18'-0"	24'-7"	23'-2"	21'-6"	27'-4"	26'-4"	24'-6"	29'-6"	28'-9"	27'-2"
		40	10	19'-6"	18'-8"	17'-8"	23'-3"	22'-4"	21'-1"	26'-0"	25'-5"	24'-0"	27'-9"	27'-0"	25'-11"
		40	15	19'-2"	18'-2"	16'-11"	22'-6"	21'-8"	20'-3"	24'-9"	23'-10"	22'-7"	25'-2"	24'-2"	22'-11"
		50	10	18'-0"	17'-3"	16'-5"	21'-6"	20'-8"	19'-8"	22'-10"	22'-3"	21'-6"	23'-2"	22'-7"	21'-10"
		50	15	18'-0"	17'-2"	16'-1"	20'-7"	19'-11"	19'-0"	21'-0"	20'-3"	19'-4"	21'-3"	20'-7"	19'-8"
24" o.c.	Non-Snow 125%	20	10	21'-10"	20'-8"	19'-2"	26'-2"	24'-8"	22'-11"	29'-9"	28'-1"	26'-1"	33'-0"	31'-2"	28'-11"
		20	15	20'-8"	19'-5"	18'-0"	24'-9"	23'-3"	21'-6"	28'-2"	26'-6"	24'-5"	31'-1"	29'-4"	27'-1"
		20	20	19'-9"	18'-6"	17'-0"	23'-7"	22'-1"	20'-4"	26'-10"	25'-2"	23'-2"	29'-0"	27'-9"	25'-3"
	Snow 115%	25	10	20'-9"	19'-8"	18'-3"	24'-10"	23'-6"	21'-10"	27'-9"	26'-9"	24'-11"	29'-11"	29'-4"	27'-7"
		25	15	19'-9"	18'-8"	17'-3"	23'-7"	22'-3"	20'-8"	25'-11"	25'-3"	23'-6"	27'-6"	26'-1"	24'-3"
		30	10	19'-10"	18'-9"	17'-6"	23'-8"	22'-6"	21'-0"	26'-0"	25'-6"	23'-10"	27'-9"	26'-9"	25'-5"
		30	15	19'-0"	17'-11"	16'-8"	22'-3"	21'-5"	19'-11"	24'-2"	23'-0"	21'-7"	24'-6"	23'-4"	21'-11"
		40	10	18'-0"	17'-3"	16'-4"	21'-2"	20'-8"	19'-7"	21'-10"	21'-3"	20'-5"	22'-2"	21'-6"	20'-8"
		40	15	17'-8"	16'-9"	15'-8"	19'-5"	18'-8"	17'-8"	19'-9"	19'-0"	18'-0"	20'-1"	19'-3"	18'-3"
		50	10	16'-8"	16'-0"	15'-2"	17'-11"	17'-6"	16'-11"	18'-2"	17'-9"	17'-2"	18'-6"	18'-0"	17'-5"
		50	15	16'-2"	15'-8"	14'-10"	16'-5"	15'-11"	15'-2"	16'-9"	16'-2"	15'-5"	17'-0"	16'-5"	15'-8"

- Table values are limited by shear, moment, total load deflection equal to L/180 and live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.
- Table values represent the most restrictive of simple or multiple span applications. Analyze multiple span joists with the BC Calc software if the length of any span is less than half the length of an adjacent span.
- Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less. 18" joists require web stiffeners at all bearing locations.
- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.
- Slope roof joists at least ¼" over 12" to minimize ponding.
- Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Roof Span Tables

Maximum clear span in feet and inches, based on horizontal spans.

115% and 125% Load Duration

				AJS® 25 Series — 9½" - 16" Depths ⅜" Web Thickness — 3½" Flange Width											
				9½" AJS® 25			11⅞" AJS® 25			14" AJS® 25			16" AJS® 25		
				4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12	4/12 or Less	4/12 to 8/12	8/12 to 12/12
12" o.c.	Non-Snow 125%	20	10	30'-5"	28'-9"	26'-8"	36'-4"	34'-3"	31'-10"	41'-4"	38'-11"	36'-2"	45'-9"	43'-2"	40'-1"
		20	15	28'-10"	27'-1"	25'-0"	34'-5"	32'-4"	29'-10"	39'-1"	36'-9"	33'-11"	43'-4"	40'-8"	37'-7"
		20	20	27'-6"	25'-9"	23'-8"	32'-10"	30'-9"	28'-3"	37'-4"	34'-11"	32'-2"	41'-4"	38'-9"	35'-7"
	Snow 115%	25	10	28'-11"	27'-4"	25'-5"	34'-6"	32'-7"	30'-4"	39'-3"	37'-1"	34'-6"	43'-5"	41'-1"	38'-3"
		25	15	27'-7"	25'-11"	24'-0"	32'-11"	31'-0"	28'-8"	37'-5"	35'-3"	32'-7"	41'-5"	39'-0"	36'-2"
		30	10	27'-8"	26'-2"	24'-5"	33'-0"	31'-3"	29'-2"	37'-6"	35'-6"	33'-2"	41'-6"	39'-4"	36'-8"
		30	15	26'-6"	25'-0"	23'-2"	31'-8"	29'-10"	27'-8"	35'-11"	33'-11"	31'-6"	39'-10"	37'-7"	34'-11"
		40	10	25'-2"	24'-1"	22'-9"	30'-0"	28'-9"	27'-2"	34'-1"	32'-9"	30'-11"	37'-10"	36'-3"	34'-3"
		40	15	24'-9"	23'-5"	21'-10"	29'-7"	28'-0"	26'-1"	33'-7"	31'-10"	29'-8"	37'-3"	35'-3"	32'-10"
Snow 115%	50	10	23'-3"	22'-4"	21'-2"	27'-9"	26'-8"	25'-4"	31'-7"	30'-4"	28'-9"	35'-0"	33'-7"	31'-11"	
	50	15	23'-3"	22'-2"	20'-9"	27'-9"	26'-6"	24'-9"	31'-7"	30'-1"	28'-2"	35'-0"	33'-4"	31'-2"	
16" o.c.	Non-Snow 125%	20	10	27'-7"	26'-0"	24'-2"	32'-11"	31'-1"	28'-10"	37'-5"	35'-4"	32'-9"	41'-6"	39'-2"	36'-4"
		20	15	26'-1"	24'-6"	22'-8"	31'-2"	29'-3"	27'-1"	35'-5"	33'-4"	30'-9"	39'-3"	36'-11"	34'-1"
		20	20	24'-11"	23'-4"	21'-5"	29'-9"	27'-10"	25'-7"	33'-10"	31'-8"	29'-1"	37'-6"	35'-1"	32'-3"
	Snow 115%	25	10	26'-2"	24'-9"	23'-1"	31'-3"	29'-7"	27'-6"	35'-6"	33'-7"	31'-3"	39'-5"	37'-3"	34'-8"
		25	15	25'-0"	23'-6"	21'-9"	29'-10"	28'-1"	26'-0"	33'-11"	31'-11"	29'-7"	37'-7"	35'-4"	32'-9"
		30	10	25'-0"	23'-8"	22'-1"	29'-10"	28'-4"	26'-5"	34'-0"	32'-2"	30'-0"	37'-8"	35'-8"	33'-3"
		30	15	24'-0"	22'-8"	21'-0"	28'-8"	27'-0"	25'-1"	32'-7"	30'-9"	28'-6"	36'-1"	34'-1"	31'-7"
		40	10	22'-9"	21'-10"	20'-7"	27'-2"	26'-1"	24'-8"	30'-11"	29'-8"	28'-0"	34'-3"	32'-10"	31'-0"
		40	15	22'-5"	21'-2"	19'-9"	26'-9"	25'-4"	23'-7"	30'-5"	28'-10"	26'-10"	33'-8"	31'-11"	29'-9"
Snow 115%	50	10	21'-0"	20'-2"	19'-2"	25'-2"	24'-2"	22'-11"	28'-7"	27'-5"	26'-1"	31'-8"	30'-5"	28'-11"	
	50	15	21'-0"	20'-1"	18'-9"	25'-2"	24'-0"	22'-5"	28'-7"	27'-3"	25'-6"	29'-7"	28'-8"	27'-4"	
19.2" o.c.	Non-Snow 125%	20	10	25'-11"	24'-5"	22'-8"	30'-11"	29'-2"	27'-1"	35'-2"	33'-2"	30'-10"	39'-0"	36'-9"	34'-2"
		20	15	24'-6"	23'-0"	21'-3"	29'-3"	27'-6"	25'-5"	33'-3"	31'-3"	28'-11"	36'-11"	34'-8"	32'-0"
		20	20	23'-5"	21'-11"	20'-2"	27'-11"	26'-2"	24'-1"	31'-9"	29'-9"	27'-4"	35'-2"	32'-11"	30'-4"
	Snow 115%	25	10	24'-7"	23'-3"	21'-8"	29'-4"	27'-9"	25'-10"	33'-5"	31'-7"	29'-5"	37'-0"	35'-0"	32'-7"
		25	15	23'-5"	22'-1"	20'-5"	28'-0"	26'-4"	24'-5"	31'-10"	30'-0"	27'-9"	35'-3"	33'-3"	30'-9"
		30	10	23'-6"	22'-3"	20'-9"	28'-1"	26'-7"	24'-10"	31'-11"	30'-3"	28'-3"	35'-4"	33'-6"	31'-3"
		30	15	22'-6"	21'-3"	19'-9"	26'-11"	25'-5"	23'-7"	30'-7"	28'-10"	26'-10"	33'-11"	32'-0"	29'-8"
		40	10	21'-4"	20'-6"	19'-4"	25'-6"	24'-6"	23'-2"	29'-0"	27'-10"	26'-4"	32'-2"	30'-10"	29'-2"
		40	15	21'-0"	19'-11"	18'-7"	25'-1"	23'-9"	22'-2"	28'-3"	27'-0"	25'-3"	29'-1"	28'-0"	26'-6"
Snow 115%	50	10	19'-9"	18'-11"	18'-0"	23'-7"	22'-8"	21'-6"	26'-1"	25'-5"	24'-6"	26'-10"	26'-2"	25'-3"	
	50	15	19'-9"	18'-10"	17'-7"	23'-3"	22'-6"	21'-0"	23'-11"	23'-2"	22'-1"	24'-8"	23'-10"	22'-9"	
24" o.c.	Non-Snow 125%	20	10	24'-0"	22'-8"	21'-0"	28'-8"	27'-0"	25'-1"	32'-7"	30'-9"	28'-6"	36'-1"	34'-1"	31'-7"
		20	15	22'-8"	21'-4"	19'-8"	27'-1"	25'-6"	23'-6"	30'-10"	29'-0"	26'-9"	34'-2"	32'-1"	29'-8"
		20	20	21'-8"	20'-3"	18'-8"	25'-10"	24'-3"	22'-3"	29'-5"	27'-6"	25'-4"	32'-7"	30'-6"	28'-1"
	Snow 115%	25	10	22'-9"	21'-6"	20'-1"	27'-2"	25'-9"	23'-11"	30'-11"	29'-3"	27'-3"	34'-3"	32'-5"	30'-2"
		25	15	21'-8"	20'-5"	18'-11"	25'-11"	24'-5"	22'-7"	29'-5"	27'-9"	25'-9"	31'-10"	30'-2"	28'-1"
		30	10	21'-9"	20'-7"	19'-3"	25'-11"	24'-7"	23'-0"	29'-6"	28'-0"	26'-2"	32'-1"	30'-11"	28'-11"
		30	15	20'-10"	19'-8"	18'-3"	24'-10"	23'-6"	21'-10"	27'-7"	26'-3"	24'-7"	28'-4"	27'-0"	25'-4"
		40	10	19'-9"	18'-11"	17'-11"	23'-7"	22'-8"	21'-5"	24'-11"	24'-3"	23'-3"	25'-8"	24'-11"	23'-11"
		40	15	19'-5"	18'-5"	17'-2"	21'-11"	21'-1"	19'-11"	22'-7"	21'-8"	20'-7"	23'-3"	22'-4"	21'-2"
Snow 115%	50	10	18'-3"	17'-6"	16'-8"	20'-2"	19'-8"	19'-0"	20'-9"	20'-3"	19'-7"	21'-5"	20'-11"	20'-2"	
	50	15	17'-11"	17'-4"	16'-3"	18'-7"	17'-11"	17'-1"	19'-1"	18'-6"	17'-8"	19'-8"	19'-0"	18'-2"	



Allowable Uniform Roof Load (in pounds per linear foot [PLF])

115% and 125% Load Duration

Use of these tables should be limited to roof slopes of 3½" per foot or less.
For steeper slopes, see pages 16-20.

Span Length	AJS® 140 Series 2½" Flange Width											
	9½" AJS® 140			11⅞" AJS® 140			14" AJS® 140			16" AJS® 140		
	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.
	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240
6	353	383	-	358	389	-	360	392	-	364	396	-
7	302	329	-	307	334	-	309	336	-	312	339	-
8	264	287	-	269	292	-	270	294	-	273	297	-
9	235	255	-	239	259	-	240	261	-	242	264	-
10	211	230	-	215	233	-	216	235	-	218	237	-
11	182	198	-	195	212	-	196	213	-	198	216	-
12	153	166	-	179	194	-	180	196	-	182	198	-
13	130	142	-	165	179	-	166	180	-	168	182	-
14	112	122	-	146	158	-	154	168	-	156	169	-
15	98	106	-	127	138	-	144	156	-	145	158	-
16	86	93	85	111	121	-	134	146	-	136	148	-
17	76	83	71	99	107	-	119	129	-	128	139	-
18	68	74	60	88	96	-	106	115	-	121	132	-
19	61	66	51	79	86	-	95	103	-	110	120	-
20	55	58	44	71	77	-	86	93	-	99	108	-
21	50	50	38	64	70	-	78	85	-	90	98	-
22	44	44	33	59	64	56	71	77	-	82	89	-
23				54	58	49	65	70	-	75	82	-
24				49	54	44	59	65	-	69	75	-
25				45	49	39	55	59	-	63	69	-
26				42	45	34	51	55	-	59	64	-
27							47	51	45	54	59	-
28							43	47	41	51	55	-
29							41	44	37	47	51	-
30										44	48	-
31										41	45	-
32												
33												
34												

- Total Load values are limited by shear, moment, or deflection equal to L/180.
- Deflection values (Deflect.) are limited by live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.
- Both the Total Load and Deflection columns must be checked. Where a Deflection value is not shown, the Total Load value will control.

- Table values apply to either simple or multiple span joists. Span is measured center to center of the minimum required bearing length. Analyze multiple span joists with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Slope roof joists at least ¼ inch over 12 inches to minimize ponding.
- Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.

- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.
- Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Allowable Uniform Roof Load (in pounds per linear foot [PLF])

115% and 125% Load Duration

Use of these tables should be limited to roof slopes of 3½" per foot or less.
For steeper slopes, see pages 16-20.

Span Length	AJS® 150 Series 2½" Flange Width											
	9½" AJS® 150			11⅞" AJS® 150			14" AJS® 150			16" AJS® 150		
	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.
	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240
6	353	383	-	358	389	-	360	392	-	364	396	-
7	302	329	-	307	334	-	309	336	-	312	339	-
8	264	287	-	269	292	-	270	294	-	273	297	-
9	235	255	-	239	259	-	240	261	-	242	264	-
10	211	230	-	215	233	-	216	235	-	218	237	-
11	192	209	-	195	212	-	196	213	-	198	216	-
12	176	191	-	179	194	-	180	196	-	182	198	-
13	150	163	-	165	179	-	166	180	-	168	182	-
14	129	141	-	153	167	-	154	168	-	156	169	-
15	113	122	109	143	155	-	144	156	-	145	158	-
16	99	107	90	128	139	-	135	147	-	136	148	-
17	87	95	76	113	123	-	127	138	-	128	139	-
18	78	84	64	101	110	-	120	130	-	121	132	-
19	70	72	55	91	99	-	110	120	-	115	125	-
20	62	62	47	82	89	79	99	108	-	109	118	-
21	53	53	41	74	81	69	90	98	-	104	113	-
22	47	47	36	67	73	60	82	89	-	94	103	-
23	41	41	31	62	67	53	75	82	-	86	94	-
24				57	61	47	69	75	68	79	86	-
25				52	54	41	63	69	60	73	79	-
26				48	48	37	59	64	54	67	73	-
27				43	43	33	54	59	48	62	68	-
28							51	55	43	58	63	-
29							47	51	39	54	59	53
30							44	46	35	50	55	48
31							41	42	32	47	51	43
32										44	48	40
33										42	45	36
34												

- Total Load values are limited by shear, moment, or deflection equal to L/180.
- Deflection values (Deflect.) are limited by live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.
- Both the Total Load and Deflection columns must be checked. Where a Deflection value is not shown, the Total Load value will control.

- Table values apply to either simple or multiple span joists. Span is measured center to center of the minimum required bearing length. Analyze multiple span joists with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Slope roof joists at least ¼ inch over 12 inches to minimize ponding.
- Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.

- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.
- Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Allowable Uniform Roof Load (in pounds per linear foot [PLF])

115% and 125% Load Duration

Use of these tables should be limited to roof slopes of 3½" per foot or less.
For steeper slopes, see pages 16-20.

Span Length	AJS® 20 Series 2½" Flange Width											
	9½" AJS® 20			11⅞" AJS® 20			14" AJS® 20			16" AJS® 20		
	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.
	Snow	Non-Snow	L/240	Snow	Non-Snow	L/240	Snow	Non-Snow	L/240	Snow	Non-Snow	L/240
	(115%)	(125%)		(115%)	(125%)		(115%)	(125%)		(115%)	(125%)	
6	353	383	-	358	389	-	360	392	-	364	396	-
7	302	329	-	307	334	-	309	336	-	312	339	-
8	264	287	-	269	292	-	270	294	-	273	297	-
9	235	255	-	239	259	-	240	261	-	242	264	-
10	211	230	-	215	233	-	216	235	-	218	237	-
11	192	209	-	195	212	-	196	213	-	198	216	-
12	176	191	-	179	194	-	180	196	-	182	198	-
13	162	177	-	165	179	-	166	180	-	168	182	-
14	151	164	-	153	167	-	154	168	-	156	169	-
15	136	147	128	143	155	-	144	156	-	145	158	-
16	119	129	106	134	146	-	135	147	-	136	148	-
17	105	115	89	126	137	-	127	138	-	128	139	-
18	94	99	76	119	129	-	120	130	-	121	132	-
19	84	85	65	109	119	108	113	123	-	115	125	-
20	73	73	56	99	107	94	108	117	-	109	118	-
21	63	63	48	89	97	81	103	112	-	104	113	-
22	55	55	42	81	89	71	98	106	-	99	108	-
23	48	48	37	74	81	62	90	98	-	95	103	-
24	43	43	33	68	72	55	82	90	80	91	99	-
25				63	64	49	76	83	71	87	95	-
26				57	57	44	70	76	63	81	89	-
27				51	51	39	65	71	57	75	82	-
28				46	46	35	60	66	51	70	76	69
29				41	41	32	56	60	46	65	71	62
30							53	55	42	61	66	56
31							49	50	38	57	62	51
32							45	45	34	54	58	47
33							41	41	31	50	55	43
34										47	51	39
35										45	47	36
36										42	43	33
37										40	40	30
38												

- Total Load values are limited by shear, moment, or deflection equal to L/180.
- Deflection values (Deflect.) are limited by live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.
- Both the Total Load and Deflection columns must be checked. Where a Deflection value is not shown, the Total Load value will control.
- Table values apply to either simple or multiple span joists. Span is measured center to center of the minimum required bearing length. Analyze multiple span joists with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Slope roof joists at least ¼ inch over 12 inches to minimize ponding.
- Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.
- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.
- Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Allowable Uniform Roof Load (in pounds per linear foot [PLF])

115% and 125% Load Duration

Use of these tables should be limited to roof slopes of 3½" per foot or less.
For steeper slopes, see pages 16-20.

Span Length	AJS® 190 Series 2½" Flange Width											
	9½" AJS® 190			11⅞" AJS® 190			14" AJS® 190			16" AJS® 190		
	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.
	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240	Snow (115%)	Non-Snow (125%)	L/240
6	353	383	-	358	389	-	360	392	-	364	396	-
7	302	329	-	307	334	-	309	336	-	312	339	-
8	264	287	-	269	292	-	270	294	-	273	297	-
9	235	255	-	239	259	-	240	261	-	242	264	-
10	211	230	-	215	233	-	216	235	-	218	237	-
11	192	209	-	195	212	-	196	213	-	198	216	-
12	176	191	-	179	194	-	180	196	-	182	198	-
13	162	177	-	165	179	-	166	180	-	168	182	-
14	151	164	-	153	167	-	154	168	-	156	169	-
15	141	153	134	143	155	-	144	156	-	145	158	-
16	132	143	111	134	146	-	135	147	-	136	148	-
17	121	123	94	126	137	-	127	138	-	128	139	-
18	104	104	79	119	129	-	120	130	-	121	132	-
19	89	89	68	113	123	-	113	123	-	115	125	-
20	77	77	59	107	116	98	108	117	-	109	118	-
21	67	67	51	102	111	85	103	112	-	104	113	-
22	58	58	44	93	97	74	98	106	-	99	108	-
23	51	51	39	85	86	65	94	102	-	95	103	-
24	45	45	34	76	76	58	90	98	84	91	99	-
25	40	40	30	67	67	51	86	94	75	87	95	-
26				60	60	46	80	87	67	84	91	-
27				54	54	41	75	78	60	80	88	-
28				48	48	37	69	70	54	78	84	72
29				43	43	33	63	63	48	75	81	65
30							57	57	44	70	76	59
31							52	52	40	66	70	54
32							47	47	36	61	64	49
33							43	43	33	58	59	45
34							40	40	30	54	54	41
35										49	49	38
36										45	45	35
37										42	42	32
38												

- Total Load values are limited by shear, moment, or deflection equal to L/180.
- Deflection values (Deflect.) are limited by live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.
- Both the Total Load and Deflection columns must be checked. Where a Deflection value is not shown, the Total Load value will control.

- Table values apply to either simple or multiple span joists. Span is measured center to center of the minimum required bearing length. Analyze multiple span joists with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Slope roof joists at least ¼ inch over 12 inches to minimize ponding.
- Table values assume minimum bearing lengths without web stiffeners for joist depths of 16 inches and less.

- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.
- Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

Allowable Uniform Roof Load (in pounds per linear foot [PLF])

115% and 125% Load Duration

Use of these tables should be limited to roof slopes of 3½" per foot or less.
For steeper slopes, see pages 16-20.

Span Length	AJS® 25 Series — 9½" - 16" Depths ⅜" Web Thickness — 3½" Flange Width											
	9½" AJS® 25			11⅞" AJS® 25			14" AJS® 25			16" AJS® 25		
	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.	Total Load		Deflect.
	Snow	Non-Snow	L/240	Snow	Non-Snow	L/240	Snow	Non-Snow	L/240	Snow	Non-Snow	L/240
	(115%)	(125%)		(115%)	(125%)		(115%)	(125%)		(115%)	(125%)	
6	356	387	-	358	389	-	360	392	-	364	396	-
7	305	332	-	307	334	-	309	336	-	312	339	-
8	267	290	-	269	292	-	270	294	-	273	297	-
9	237	258	-	239	259	-	240	261	-	242	264	-
10	214	232	-	215	233	-	216	235	-	218	237	-
11	194	211	-	195	212	-	196	213	-	198	216	-
12	178	193	-	179	194	-	180	196	-	182	198	-
13	164	179	-	165	179	-	166	180	-	168	182	-
14	152	166	-	153	167	-	154	168	-	156	169	-
15	142	155	-	143	155	-	144	156	-	145	158	-
16	133	145	-	134	146	-	135	147	-	136	148	-
17	125	136	121	126	137	-	127	138	-	128	139	-
18	118	129	103	119	129	-	120	130	-	121	132	-
19	112	116	88	113	123	-	113	123	-	115	125	-
20	100	100	76	107	116	-	108	117	-	109	118	-
21	87	87	66	102	111	-	103	112	-	104	113	-
22	76	76	58	93	102	-	98	106	-	99	108	-
23	67	67	51	85	93	-	94	102	-	95	103	-
24	59	59	45	78	85	75	90	98	-	91	99	-
25	52	52	40	72	79	67	86	94	-	87	95	-
26	46	46	35	67	73	59	80	87	-	84	91	-
27	42	42	32	62	67	53	75	81	-	80	88	-
28				58	63	48	69	75	-	78	84	-
29				54	57	43	65	70	63	75	81	-
30				50	51	39	60	66	57	70	76	-
31				47	47	35	56	61	52	66	71	-
32				42	42	32	53	58	47	61	67	-
33							50	54	43	58	63	-
34							47	51	39	54	59	53
35							44	47	36	51	56	49
36							42	44	33	48	53	45
37										46	50	41
38										43	47	38

- Total Load values are limited by shear, moment, or deflection equal to L/180.
- Deflection values (Deflect.) are limited by live load deflection equal to L/240. Check the local building code for other deflection limits that may apply.
- Both the Total Load and Deflection columns must be checked. Where a Deflection value is not shown, the Total Load value will control

- Table values apply to either simple or multiple span joists. Span is measured center to center of the minimum required bearing length. Analyze multiple span joists with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Slope roof joists at least ¼ inch over 12 inches to minimize ponding.
- Table values assume minimum bearing lengths without web stiffeners for joist depths

of 16 inches and less. 18" joists require web stiffeners at all bearing locations.

- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.
- Allowable spans and loads shall be adjusted and checked for wind load as required by local building code.

AJS® Joist Series	Depth [inches]	Weight [plf]	Moment M _r [ft-lbs]	EI x 10 ⁶ [lb-in ²]	K x 10 ⁶ [lbs]	Shear V [lbs]	End Reaction [lbs]				Intermediate Reaction [lbs]			
							1½" Bearing		3½" Bearing		3½" Bearing		5¼" Bearing	
							No WS ⁽¹⁾	WS ⁽²⁾	No WS ⁽¹⁾	WS ⁽²⁾	No WS ⁽¹⁾	WS ⁽²⁾	No WS ⁽¹⁾	WS ⁽²⁾
AJS® 140	9½	2.2	2450	182	5.2	1160	950	1240	1175	1480	2350	2450	2350	2450
	11⅞	2.5	3175	310	6.6	1490	955	1335	1215	1595	2390	2800	2390	2800
	14	2.8	3825	457	7.8	1790	960	1420	1250	1700	2430	3130	2430	3130
	16	3.1	4435	623	9.0	2065	970	1500	1285	1800	2465	3435	2465	3435
AJS® 150	9½	2.2	2820	194	5.2	1160	950	1240	1175	1480	2350	2450	2350	2450
	11⅞	2.5	3650	331	6.6	1490	955	1335	1215	1595	2390	2800	2390	2800
	14	2.8	4390	487	7.8	1790	960	1420	1250	1700	2430	3130	2430	3130
	16	3.1	5090	664	9.0	2065	970	1500	1285	1800	2465	3435	2465	3435
AJS® 20	9½	2.5	3395	232	5.2	1160	950	1240	1175	1480	2350	2450	2350	2450
	11⅞	2.8	4400	394	6.6	1490	955	1335	1215	1595	2390	2800	2390	2800
	14	3.0	5295	578	7.8	1790	960	1420	1250	1700	2430	3130	2430	3130
	16	3.3	6140	786	9.0	2065	970	1500	1285	1800	2465	3435	2465	3435
AJS® 190	9½	2.5	3895	244	5.2	1160	950	1240	1175	1480	2350	2450	2350	2450
	11⅞	2.8	5045	414	6.6	1490	955	1335	1215	1595	2390	2800	2390	2800
	14	3.0	6070	608	7.8	1790	960	1420	1250	1700	2430	3130	2430	3130
	16	3.3	7040	827	9.0	2065	970	1500	1285	1800	2465	3435	2465	3435
AJS® 25	9½	3.1	5370	322	5.3	1160	950	1240	1175	1480	2600	2850	2600	2850
	11⅞	3.4	6960	545	6.7	1490	955	1335	1215	1595	2690	3190	2690	3190
	14	3.7	8380	798	7.9	1790	960	1420	1250	1700	2770	3500	2770	3500
	16	3.9	9720	1082	9.1	2065	970	1500	1285	1800	2850	3800	2850	3800

NOTES:

- (1) No web stiffeners required.
 - (2) Web stiffeners required.
 - (3) Not applicable, web stiffeners required.
- Moment, shear and reaction values based upon a load duration of 100% and may be adjusted for other load durations.
 - Design values listed are applicable for Allowable Stress Design (ASD).
 - No additional repetitive member increase allowed.

BUILDING CODE EVALUATION REPORT

- ICC ESR 1144 (IBC, IRC)


$$\Delta = \frac{5wl^4}{384EI} + \frac{wl^2}{K}$$

- Δ = deflection [in]
 w = uniform load [lb/in]
 l = clear span [in]
 EI = bending stiffness [lb-in²]
 K = shear deformation coefficient [lb]

Connection on Steel Beam

F15D


Attachment of nailer per design professional of record.

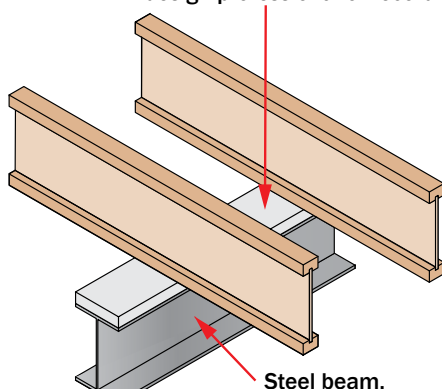

Connection with Hanger on Steel Beam

F15E


Attachment of nailer per design professional of record.

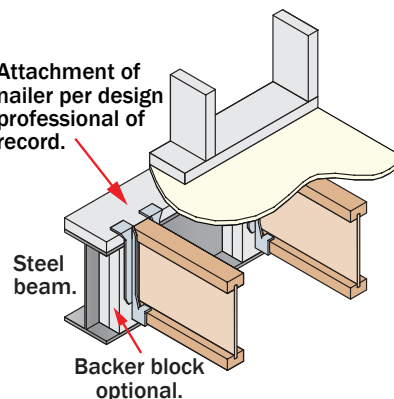

Hanger Connections to AJS Headers

F16D


- Backer blocks shall be at least 12" long per hanger.
- Nails shall be clinched when possible.
- Verify capacity and fastening requirements of hangers and connectors.

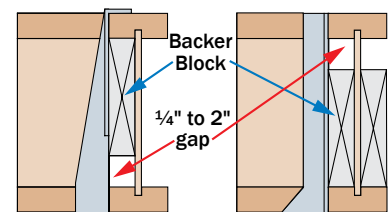

"Top Mount"
Backer block shall be tight to bottom of top flange with ¼" to 2" gap at top of bottom flange.

"Face Mount"
Backer block shall be tight to bottom of top flange with ¼" to 2" gap at top of bottom flange.

BOISE CASCADE® Rimboard Product Profiles

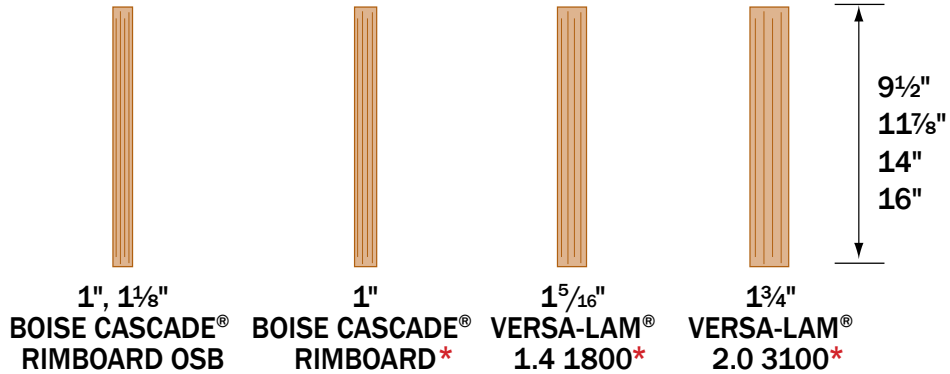

*18 – 24 inch deep rimboard are special order products, contact local supplier or Boise Cascade representative for product availability.

F07 **Perpendicular**
See chart for vertical load capacity.

Min. 8d nails at 6" o.c. per IRC.
Connection per design professional of record's specification for shear transfer.

F07A **Parallel**
See chart for vertical load capacity.

Min. 8d nails at 6" o.c. per IRC.
Connection per design professional of record's specification for shear transfer.

F56

1/2" dia through bolts (ASTM A307 Grades A&B, SAE J429 Grades 1 or 2, or higher) with washers and nuts or 1/2" dia lag screws (full penetration)
350 lb capacity for 1 1/2" & thicker rim,
300 lb capacity for 1" rim, per fastener

Exterior wood sheathing

Treated Ledger - Use only fasteners that are approved for use with corresponding wood treatment.

BOISE CASCADE® Rimboard

Design of moisture control by others (only structural components shown above)

For information regarding connection of exterior decks to interior floor systems per the 2009 IRC, section 502.2.2.3, contact Boise Cascade EWP Engineering.

BOISE CASCADE® Rimboard Properties

Product	Vertical Load Capacity						Maximum Floor Diaphragm Lateral Capacity [lb/ft]	Specific Gravity for Lateral Nail Design	Allowable Design Values			
	Uniform [plf]			Point [lb]					Flexural Stress [lb/in²]	Modulus of Elasticity [lb/in²]	Horizontal Shear [lb/in²]	Compression Perpendicular to Grain [lb/in²]
	16" Depth & Less	18" & 20" Depth & Less	22" & 24" Depth & Less	16" Depth & Less	18" & 20" Depth & Less	22" & 24" Depth & Less						
1" BOISE CASCADE® RIMBOARD ⁽²⁾ & 1" BOISE CASCADE® RIMBOARD OSB ⁽²⁾	3300	1650	1650	3500	3500	3500	180	0.5	Limited span capabilities, see note 2			
1⅝" BOISE CASCADE® RIMBOARD OSB ⁽²⁾	4400	3000	3000	3500	3500	3500	180	0.5	Limited span capabilities, see note 2			
1⅝" VERSA-LAM® 1.4 1800 ⁽¹⁾	6000	5450	—	4450	4450	—	Permitted per building code for all nominal 2" thick framing blocked and unblocked diaphragms (4" nail spacing & greater)	0.5	1800	1,400,000	225	525
1¾" VERSA-LAM® 2.0 3100 ⁽¹⁾	5700	4300	—	4300	3900	—	Permitted per building code for all nominal 2" thick framing blocked and unblocked diaphragms (4" nail spacing & greater)	0.5	2800	2,000,000	285	750

Product	Closest Allowable Nail Spacing - Narrow Face [in]					
	8d Box	8d Common	10d & 12d Box	16d Box	10d, 12d Common & 16d Sinker	16d Common
1" BOISE CASCADE® RIMBOARD ⁽²⁾	3	3	-	-	-	-
1" or 1 1/8" BOISE CASCADE® RIMBOARD OSB ⁽²⁾	3	3	See note 2 for nailing information			
1 5/16" VERSA-LAM® 1.4 1800 ⁽¹⁾	3	3	3	3	4	6
1 3/4" VERSA-LAM® 2.0 3100 ⁽¹⁾	2	3	3	3	4	6

Notes

- Per ICC ESR-1040.
- See *Performance Rated Rim Boards, APA EWS #W345K* for further product information.
- Not all products and depths may be available, check with Boise Cascade representative for product availability.

An Introduction to VERSA-LAM® Products



When you specify VERSA-LAM® laminated veneer headers/beams, you are building quality into your design. They are excellent as floor and roof framing supports or as headers for doors, windows and garage doors and columns.

Because they have no camber, VERSA-LAM® LVL products provide flatter, quieter floors, and consequently, the builder can expect happier customers with significantly fewer call backs.

VERSA-LAM® Beam Architectural Specifications

Scope: This work includes the complete furnishing and installation of all VERSA-LAM® beams as shown on the drawings, herein specified and necessary to complete the work.

Materials: Southern Pine or Douglas fir veneers, laminated in a press with all grain parallel with the length of the member. Glues used in lamination are phenol formaldehyde and isocyanate exterior-type adhesives which comply with ASTM D2559.

Design: VERSA-LAM® beams shall be sized and detailed to fit the dimensions and loads indicated on the plans. All designs shall be in accordance with allowable values developed in accordance with ASTM D5456 and listed in the governing

code evaluation service's report and section properties based upon standard engineering principles. Verification of design of the VERSA-LAM® beams by complete calculations shall be available upon request.

Drawings: Additional drawings showing layout and detail necessary for determining fit and placement in the buildings are (are not) to be provided by the supplier.

Fabrication: VERSA-LAM® beams shall be manufactured in a plant evaluated for fabrication by the governing code evaluation service and under the supervision of a third-party inspection agency listed by the corresponding evaluation service.

Storage and Installation: VERSA-LAM® beams, if stored prior to erection, shall be stored on stickers spaced a maximum of 15 ft. apart. Beams shall be stored on a dry, level surface and protected from the weather. They shall be handled with care so they are not damaged.

VERSA-LAM® beams are to be installed in accordance with the plans and Boise Cascade EWP's Installation Guide. Temporary construction loads which cause stresses beyond design limits are not permitted. Erection bracing shall be provided to assure adequate lateral support for the individual beams and the entire system until the sheathing material has been applied.


Codes: VERSA-LAM® beams shall be evaluated by a model code evaluation service.

Allowable Holes in VERSA-LAM® Beams


Notes

1. Square and rectangular holes are not permitted.
2. Round holes may be drilled or cut with a hole saw anywhere within the shaded area of the beam.
3. The horizontal distance between adjacent holes must be at least two times the size of the larger hole.
4. Do not drill more than three access holes in any four foot long section of beam.
5. The maximum round hole diameter permitted is:

Beam Depth	Max. Hole Diameter
5 1/2"	3/4"
7 1/4"	1"
9 1/4" and greater	2"

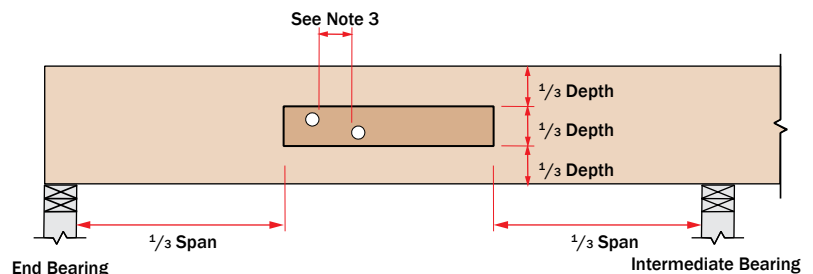

6. These limitations apply to holes drilled for plumbing or wiring access only. The size and location of holes drilled for fasteners are governed by the provisions of the *National Design Specification® for Wood Construction*.
7. Beams deflect under load. Size holes to provide clearance where required.
8. This hole chart is valid for beams supporting uniform load only. For beams supporting concentrated loads or for beams with larger holes, contact Boise Cascade EWP Engineering.

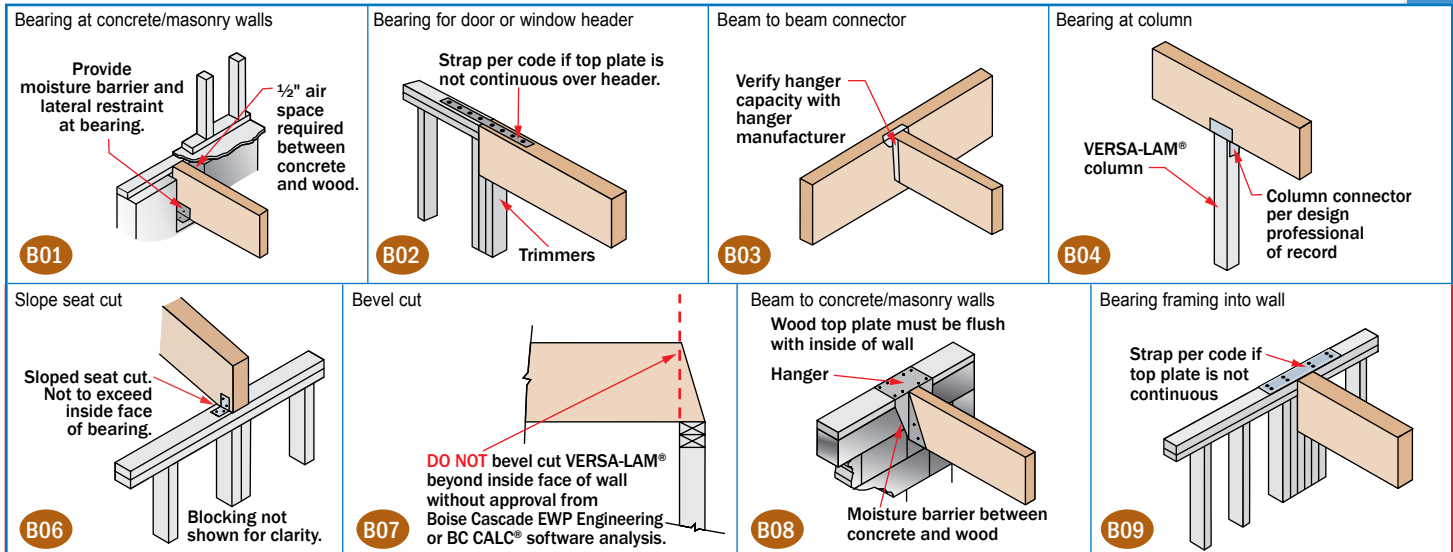

VERSA-LAM® Installation Notes

- Minimum of 1/2" air space between beam and wall pocket or adequate barrier must be provided between beam and concrete/masonry.
- Adequate bearing shall be provided. If not shown on plans, please refer to load tables in your region's Specifier Guide.
- VERSA-LAM® beams are intended for interior applications only and should be kept as dry as possible during construction.
- Continuous lateral support of top of beam shall be provided (side or top bearing framing).

Multiple Member Connectors

Side-Loaded Applications

Number of Members	Maximum Uniform Side Load [plf]						
	1 1/4" VERSA-LAM® (Depths of 18" and less)						
	Nailed	1/2" Dia. Through Bolt ⁽¹⁾	3/8" Dia. Through Bolt ⁽¹⁾	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.
2	470	705	505	1010	2020	560	1120
3 ⁽²⁾	350	525	375	755	1515	420	840
4 ⁽³⁾	use bolt schedule	335	670	1345	370	745	1495
Number of Members	3 1/2" VERSA-LAM®						
	Nailed	1/2" Dia. Through Bolt ⁽¹⁾	3/8" Dia. Through Bolt ⁽¹⁾	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.
	Nailed	1/2" Dia. Through Bolt ⁽¹⁾	3/8" Dia. Through Bolt ⁽¹⁾	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.
2	470	705	505	1010	2020	560	1120
3 ⁽²⁾	350	525	375	755	1515	420	840
4 ⁽³⁾	use bolt schedule	335	670	1345	370	745	1495
Number of Members	1 1/4" VERSA-LAM® (Depths of 24")						
	Nailed	1/2" Dia. Through Bolt ⁽¹⁾	3/8" Dia. Through Bolt ⁽¹⁾	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.
	Nailed	1/2" Dia. Through Bolt ⁽¹⁾	3/8" Dia. Through Bolt ⁽¹⁾	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.	2 rows @ 12" o.c.
2	705	940	755	1010	1515	840	1120
3 ⁽²⁾	525	705	565	755	1135	630	840
4 ⁽³⁾	use bolt schedule	505	670	1010	560	745	1120

- Design values apply to common bolts that conform to ANSI/ASME standard B18.21-1981 (ASTM A307 Grades A&B, SAE J429 Grades 1 or 2, or higher). A washer not less than a standard cut washer shall be between the wood and the bolt head and between the wood and the nut. The distance from the edge of the beam to the bolt holes must be at least 2" for 1/2" bolts and 2 1/2" for 3/8" bolts. Bolt holes shall be the same diameter as the bolt.
- The nail schedules shown apply to both sides of a 3-member beam.
- 7" wide beams must be top-loaded or loaded from both sides (lesser side shall be no less than 25% of opposite side).

Top-Loaded Applications

For top-loaded beams and beams with side loads with less than those shown:


Ply	Depth	Nailing	Maximum Uniform Load From One Side
(2) 1 1/4" plies	Depths 11 1/2" & less	2 rows 16d box/sinker nails @ 12" o.c.	400 plf
	Depths 14" - 18"	3 rows 16d box/sinker nails @ 12" o.c.	600 plf
	Depth = 24"	4 rows 16d box/sinker nails @ 12" o.c.	800 plf
(3) 1 1/4" plies ⁽²⁾	Depths 11 1/2" & less	2 rows 16d box/sinker nails @ 12" o.c.	300 plf
	Depths 14" - 18"	3 rows 16d box/sinker nails @ 12" o.c.	450 plf
	Depth = 24"	4 rows 16d box/sinker nails @ 12" o.c.	600 plf
(4) 1 1/4" plies	Depths 18" & less	2 rows 1/2" bolts @ 24" o.c., staggered	335 plf
	Depth = 24"	3 rows 1/2" bolts @ 24" o.c., staggered every 8"	505 plf
(2) 3 1/2" plies	Depths 18" & less	2 rows 1/2" bolts @ 24" o.c., staggered	855 plf
	Depth 20" - 24"	3 rows 1/2" bolts @ 24" o.c., staggered every 8"	1285 plf

- Beams wider than 7" must be designed by the engineer of record.
- All values in these tables may be increased by 15% for snow-load roofs and by 25% for non-snow load roofs where the building code allows.
- Use allowable load tables or BC CALC® software to size beams.
- An equivalent specific gravity of 0.5 may be used when designing specific connections with VERSA-LAM®.
- Connection values are based upon the 2005 NDS.
- FastenMaster TrussLok, Simpson Strong-Tie SDS, and USP WS screws may also be used to connect multiple member VERSA-LAM® beams, contact Boise Cascade EWP Engineering for further information.

Designing Connections for Multiple VERSA-LAM® Members

When using multiple ply VERSA-LAM® beams to create a wider member, the connection of the plies is as critical as determining the beam size. When side loaded beams are not connected properly, the inside plies do not support their share of the load and thus the load-carrying capacity of the full member decreases significantly. The following is an example of how to size and connect a multiple-ply VERSA-LAM® floor beam.

Given: Beam shown below is supporting residential floor load (40 psf live load, 10 psf dead load) and is spanning 16'-0". Beam depth is limited to 14".

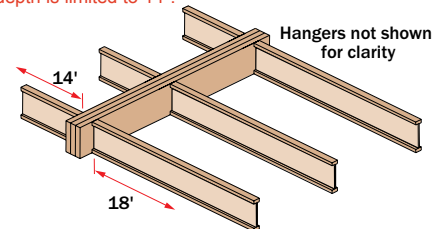

Find: A multiple 1 1/4" ply VERSA-LAM® that is adequate to support the design loads and the member's proper connection schedule.

- Calculate the tributary width that beam is supporting:
 $14' / 2 + 18' / 2 = 16'$
- Use PLF tables on pages 30-32 of ASG or BC CALC® to size beam.
A Triple VERSA-LAM® 2.0 3100 1 1/4" x 14" is found to adequately support the design loads
- Calculate the maximum plf load from one side (the right side in this case).
Max. Side Load = $(18' / 2) \times (40 + 10 \text{ psf}) = 450 \text{ plf}$
- Go to the Multiple Member Connection Table, Side-Loaded Applications, 1 1/4" VERSA-LAM®, 3 members
- The proper connection schedule must have a capacity greater than the max. side load:

Nailed: 3 rows 16d sinkers @ 12" o.c.:

525 plf is greater than 450 plf OK

Bolts: 1/2" diameter 2 rows @ 12" staggered:

755 plf is greater than 450 plf OK

VERSA-LAM® Floor Load Tables

VERSA-LAM® 2.0 3100 (100% Load Duration)

KEY TO TABLE

Top Figure	-	Allowable Total Load [plf]
Middle Figure	-	Allowable Live Load [plf]
Bottom Figures	-	Minimum Required Bearing Length at End / Intermediate Supports [inches]

Span [ft]	1½" VERSA-LAM® 2.0 3100				Double Ply 1½" VERSA-LAM® 2.0 3100 or 3½" VERSA-LAM 2.0 3100								Triple Ply 1½" VERSA-LAM® 2.0 3100 or 5½" VERSA-LAM 2.0 3100								Quadruple Ply 1½" VERSA-LAM® 2.0 3100 or 7" VERSA-LAM 2.0 3100					
	7¼"	9½"	11¾"	14"	7¼" 4	9½"	11¾"	14"	16"	18"	24"	9½"	11¾"	14"	16"	18"	20"	24"	11¾"	14"	16"	18"	20"	24"		
6	763	1063	1424	1795	1525	2126	2849	3590	4387	5232	5226	3189	4273	5384	6580	7848	7845	7838	5697	7179	8773	10463	10459	10451		
	762	-	-	-	1525	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	1.8/4.4	2.4/6.1	3.3/8.2	4.1/10.3	1.8/4.4	2.4/6.1	3.3/8.2	4.1/10.3	5/12.6	6/15	6/15	2.4/6.1	3.3/8.2	4.1/10.3	5/12.6	6/15	6/15	6/15	3.3/8.2	4.1/10.3	5/12.6	6/15	6/15	6/15		
8	479	746	979	1207	957	1492	1957	2414	2886	3402	3913	2237	2936	3622	4328	5103	5876	5870	3914	4829	5771	6803	7834	7826		
	322	724	-	-	643	1447	-	-	-	-	-	2171	-	-	-	-	-	-	-	-	-	-	-	-		
	1.5/3.7	2.3/5.7	3/7.5	3.7/9.3	1.5/3.7	2.3/5.7	3/7.5	3.7/9.3	4.4/11.1	5.2/13	6/15	2.3/5.7	3/7.5	3.7/9.3	4.4/11.1	5.2/13	6/15	6/15	3/7.5	3.7/9.3	4.4/11.1	5.2/13	6/15	6/15		
10	243	551	745	909	487	1102	1489	1817	2148	2502	3126	1653	2234	2726	3222	3753	4322	4688	2978	3635	4296	5003	5763	6251		
	165	370	724	-	329	741	1447	-	-	-	-	1111	2171	-	-	-	-	-	2894	-	-	-	-	-		
	1.5/3	2.1/5.3	2.9/7.1	3.5/8.7	1.5/3	2.1/5.3	2.9/7.1	3.5/8.7	4.1/10.3	4.8/12	6/15	2.1/5.3	2.9/7.1	3.5/8.7	4.1/10.3	4.8/12	5.5/13.8	6/15	2.9/7.1	3.5/8.7	4.1/10.3	4.8/12	5.5/13.8	6/15		
11	182	413	665	808	364	825	1330	1617	1904	2209	2839	1238	1995	2425	2856	3313	3800	4259	2659	3233	3807	4417	5067	5679		
	124	278	544	-	247	557	1087	-	-	-	-	835	1631	-	-	-	-	-	2175	-	-	-	-	-		
	1.5/3	1.7/4.4	2.8/7	3.4/8.5	1.5/3	1.7/4.4	2.8/7	3.4/8.5	4/10.1	4.7/11.7	6/15	1.7/4.4	2.8/7	3.4/8.5	4/10.1	4.7/11.7	5.4/13.4	6/15	2.8/7	3.4/8.5	4/10.1	4.7/11.7	5.4/13.4	6/15		
12	139	317	585	728	279	634	1170	1456	1709	1977	2601	950	1755	2184	2564	2965	3390	3901	2340	2912	3418	3953	4519	5201		
	95	214	419	686	191	429	837	1372	-	-	-	643	1256	2058	-	-	-	-	1675	2745	-	-	-	-		
	1.5/3	1.5/3.7	2.7/6.8	3.4/8.4	1.5/3	1.5/3.7	2.7/6.8	3.4/8.4	3.9/9.9	4.6/11.4	6/15	1.5/3.7	2.7/6.8	3.4/8.4	3.9/9.9	4.6/11.4	5.2/13	6/15	2.7/6.8	3.4/8.4	3.9/9.9	4.6/11.4	5.2/13	6/15		
13	109	248	488	662	217	496	976	1324	1550	1789	2399	744	1464	1986	2326	2683	3059	3598	1952	2647	3101	3577	4078	4797		
	75	169	329	540	150	337	659	1079	-	-	-	506	988	1619	-	-	-	-	1317	2159	-	-	-	-		
	1.5/3	1.5/3.1	2.4/6.1	3.3/8.3	1.5/3	1.5/3.1	2.4/6.1	3.3/8.3	3.9/9.7	4.5/11.2	6/15	1.5/3.1	2.4/6.1	3.3/8.3	3.9/9.7	4.5/11.2	5.1/12.7	6/15	2.4/6.1	3.3/8.3	3.9/9.7	4.5/11.2	5.1/12.7	6/15		
14	86	198	390	585	173	395	779	1171	1418	1633	2226	593	1169	1756	2128	2449	2786	3338	1558	2342	2837	3265	3715	4451		
	60	135	264	432	120	270	527	864	1290	-	-	405	791	1296	1935	-	-	-	1055	1728	2580	-	-	-		
	1.5/3	1.5/3	2.1/5.3	3.2/7.9	1.5/3	1.5/3	2.1/5.3	3.2/7.9	3.8/9.6	4.4/11	6/15	1.5/3	2.1/5.3	3.2/7.9	3.8/9.6	4.4/11	5/12.5	6/15	2.1/5.3	3.2/7.9	3.8/9.6	4.4/11	5/12.5	6/15		
15	70	160	316	509	139	320	631	1018	1307	1502	2076	479	947	1527	1960	2253	2558	3113	1262	2036	2614	3003	3410	4151		
	49	110	214	351	98	220	429	703	1049	1493	-	329	643	1054	1573	2240	-	-	858	1405	2098	2987	-	-		
	1.5/3	1.5/3	1.8/4.6	2.9/7.4	1.5/3	1.5/3	1.8/4.6	2.9/7.4	3.8/9.5	4.3/10.9	6/15	1.5/3	1.8/4.6	2.9/7.4	3.8/9.5	4.3/10.9	4.9/12.3	6/15	1.8/4.6	2.9/7.4	3.8/9.5	4.3/10.9	4.9/12.3	6/15		
16	57	131	259	427	113	262	518	854	1151	1390	1944	393	777	1281	1727	2085	2364	2917	1036	1708	2303	2780	3151	3889		
	40	90	177	289	80	181	353	579	864	1230	-	271	530	868	1296	1846	-	-	707	1158	1728	2461	-	-		
	1.5/3	1.5/3	1.6/4	2.6/6.6	1.5/3	1.5/3	1.6/4	2.6/6.6	3.6/8.9	4.3/10.7	6/15	1.5/3	1.6/4	2.6/6.6	3.6/8.9	4.3/10.7	4.9/12.2	6/15	1.6/4	2.6/6.6	3.6/8.9	4.3/10.7	4.9/12.2	6/15		
17	108	215	355	93	217	430	710	1018	1274	1826	325	645	1065	1527	1911	2196	2739	860	1420	2036	2547	2929	3652			
	75	147	241	67	151	295	483	720	1026	-	226	442	724	1081	1539	2111	-	-	589	965	1441	2052	2814	-		
	1.5/3	1.5/3.6	2.3/5.9	1.5/3	1.5/3	1.5/3.6	2.3/5.9	3.3/8.4	4.2/10.5	6/15	1.5/3	1.5/3.6	2.3/5.9	3.3/8.4	4.2/10.5	4.8/12	6/15	1.5/3.6	2.3/5.9	3.3/8.4	4.2/10.5	4.8/12	6/15			
18	90	180	298	77	181	360	596	894	1134	1701	271	540	894	1341	1701	2051	2552	720	1191	1788	2268	2735	3402			
	64	124	203	56	127	248	407	607	864	-	191	372	610	910	1296	1778	-	-	496	813	1214	1728	2371	-		
	1.5/3	1.5/3.2	2.1/5.2	1.5/3	1.5/3	1.5/3.2	2.1/5.2	3.1/7.8	4/9.9	5.9/14.8	1.5/3	1.5/3.2	2.1/5.2	3.1/7.8	4/9.9	4.8/11.9	5.9/14.8	1.5/3.2	2.1/5.2	3.1/7.8	4/9.9	4.8/11.9	5.9/14.8			
19	76	152	252	65	152	304	504	758	1016	1592	229	457	757	1137	1524	1863	2388	609	1009	1516	2032	2484	3184			
	54	105	173	48	108	211	346	516	735	-	162	316	519	774	1102	1512	-	-	422	691	1032	1470	2016	-		
	1.5/3	1.5/3	1.9/4.7	1.5/3	1.5/3	1.5/3	1.9/4.7	2.8/7	3.7/9.4	5.8/14.6	1.5/3	1.5/3	1.9/4.7	2.8/7	3.7/9.4	4.6/11.4	5.8/14.6	1.5/3	1.9/4.7	2.8/7	3.7/9.4	4.6/11.4	5.8/14.6			
20	65	130	215	54	129	259	430	647	915	1496	194	389	646	971	1373	1678	2243	519	861	1295	1830	2237	2991			
	46	90	148	41	93	181	296	442	630	1493	139	271	445	664	945	1296	2240	362	593	885	1260	1728	2987			
	1.5/3	1.5/3	1.7/4.2	1.5/3	1.5/3	1.5/3	1.7/4.2	2.5/6.3	3.6/8.9	5.8/14.5	1.5/3	1.5/3	1.7/4.2	2.5/6.3	3.6/8.9	4.3/10.8	5.8/14.5	1.5/3	1.7/4.2	2.5/6.3	3.6/8.9	4.3/10.8	5.8/14.5			
22	96	160			95	192	320	482	692	1304	142	288	480	724	1038	1382	1956	384	640	965	1383	1842	2608			
	68	111			70	136	223	332	473	1122	104	204	334	499	710	974	1683	272	445	665	947	1299	2244			
	1.5/3	1.5/3.5			1.5/3	1.5/3	1.5/3.5	2.1/5.2	3/7.4	5.6/13.9	1.5/3	1.5/3	1.5/3.5	2.1/5.2	3/7.4	3.9/9.9	5.6/13.9	1.5/3	1.5/3.5	2.1/5.2	3/7.4	3.9/9.9	5.6/13.9			
24	72	122			71	145	243	368	529	1092	106	217	365	552	793	1095	1638	290	486	736	1057	1460	2184			
	52	86			54	105	172	256	365	864	80	157	257	384	547	750	1296	209	343	512	729	1000	1728			
	1.5/3	1.5/3			1.5/3	1.5/3	1.5/3	1.8/4.4	2.5/6.3	5.1/12.8	1.5/3	1.5/3	1.5/3	1.8/4.4	2.5/6.3	3.4/8.6	5.1/12.8	1.5/3	1.5/3	1.8/4.4	2.5/6.3	3.4/8.6	5.1/12.8			
26	56	94			54	111	188	286	412	927	80	167	282	429	618	855	1390	223	376	572	824	1139	1853			
	41	67			42	82	135	201	287	680	63	124	202	302	430	590	1020	165	270	403	574	787	1359			
	1.5/3	1.5/3			1.5/3	1.5/3	1.5/3	1.5/3.7	2.1/5.3	4.7/11.8	1.5/3	1.5/3	1.5/3	1.5/3.7	2.1/5.3	2.9/7.3	4.7/11.8	1.5/3	1.5/3	1.5/3.7	2.1/5.3	2.9/7.3	4.7/11.8			
28	74				87																					

VERSA-LAM® 2.0 3100 (115% Load Duration)

KEY TO TABLE

Top Figure	-	Allowable Total Load [plf]
Middle Figure	-	Allowable Live Load [plf]
Bottom Figures	-	Minimum Required Bearing Length at End / Intermediate Supports [inches]

Span [ft]	1¼" VERSA-LAM® 2.0 3100				Double Ply 1¼" VERSA-LAM® 2.0 3100 or 3½" VERSA-LAM 2.0 3100								Triple Ply 1¼" VERSA-LAM® 2.0 3100 or 5½" VERSA-LAM 2.0 3100								Quadruple Ply 1¼" VERSA-LAM® 2.0 3100 or 7" VERSA-LAM 2.0 3100					
	7¼"	9½"	11½"	14"	7¼"	9½"	11½"	14"	16"	18"	24"	9½"	11½"	14"	16"	18"	20"	24"	11½"	14"	16"	18"	20"	24"		
6	878	1223	1639	2065	1755	2446	3278	4130	5047	5232	5226	3669	4917	6195	7570	7848	7845	7838	6556	8260	10094	10463	10459	10451		
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	2/5	2.8/7	3.8/9.4	4.7/11.8	2/5	2.8/7	3.8/9.4	4.7/11.85.8/14.5	6/15	6/15	2.8/7	3.8/9.4	4.7/11.85.8/14.5	6/15	6/15	6/15	6/15	6/15	3.8/9.4	4.7/11.85.8/14.5	6/15	6/15	6/15	6/15		
8	598	858	1126	1389	1197	1717	2252	2779	3321	3915	3913	2575	3379	4168	4981	5872	5876	5870	4505	5558	6642	7829	7834	7826		
	482	-	-	-	965	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	1.8/4.6	2.6/6.6	3.5/8.6	4.3/10.6	1.8/4.6	2.6/6.6	3.5/8.6	4.3/10.65.1/12.7	6/15	6/15	2.6/6.6	3.5/8.6	4.3/10.65.1/12.7	6/15	6/15	6/15	6/15	6/15	3.5/8.6	4.3/10.65.1/12.7	6/15	6/15	6/15	6/15		
10	326	637	857	1046	651	1274	1714	2092	2472	2880	3126	1912	2571	3138	3709	4320	4695	4688	3429	4184	4945	5759	6259	6251		
	247	556	-	-	494	1111	-	-	-	-	-	1667	-	-	-	-	-	-	-	-	-	-	-	-		
	1.5/3.1	2.4/6.1	3.3/8.2	4/10	1.5/3.1	2.4/6.1	3.3/8.2	4/10	4.7/11.95.5/13.8	6/15	6/15	2.4/6.1	3.3/8.2	4/10	4.7/11.95.5/13.8	6/15	6/15	6/15	3.3/8.2	4/10	4.7/11.95.5/13.8	6/15	6/15	6/15		
11	244	526	765	931	487	1052	1531	1861	2192	2543	2839	1577	2296	2792	3288	3814	4265	4259	3062	3723	4383	5085	5687	5679		
	186	418	-	-	371	835	-	-	-	-	-	1253	-	-	-	-	-	-	-	-	-	-	-	-		
	1.5/3	2.2/5.6	3.2/8.1	3.9/9.8	1.5/3	2.2/5.6	3.2/8.1	3.9/9.8	4.6/11.65.4/13.4	6/15	6/15	2.2/5.6	3.2/8.1	3.9/9.8	4.6/11.65.4/13.4	6/15	6/15	6/15	3.2/8.1	3.9/9.8	4.6/11.65.4/13.4	6/15	6/15	6/15		
12	187	424	674	838	374	848	1347	1676	1968	2276	2601	1272	2021	2514	2952	3414	3903	3901	2694	3353	3936	4552	5203	5201		
	143	322	628	-	286	643	1256	-	-	-	-	965	1884	-	-	-	-	-	2512	-	-	-	-	-		
	1.5/3	2/4.9	3.1/7.8	3.9/9.7	1.5/3	2/4.9	3.1/7.8	3.9/9.7	4.5/11.35.2/13.1	6/15	6/15	2/4.9	3.1/7.8	3.9/9.7	4.5/11.35.2/13.1	6/15	6/15	6/15	3.1/7.8	3.9/9.7	4.5/11.35.2/13.1	6/15	6/15	6/15		
13	146	332	573	762	292	665	1146	1524	1785	2060	2399	997	1719	2287	2678	3089	3522	3598	2292	3049	3571	4119	4696	4797		
	112	253	494	-	225	506	988	-	-	-	-	759	1482	-	-	-	-	-	1976	-	-	-	-	-		
	1.5/3	1.7/4.2	2.9/7.2	3.8/9.5	1.5/3	1.7/4.2	2.9/7.2	3.8/9.5	4.5/11.25.1/12.9	6/15	6/15	1.7/4.2	2.9/7.2	3.8/9.5	4.5/11.25.1/12.95.9/14.7	6/15	6/15	6/15	2.9/7.2	3.8/9.5	4.5/11.25.1/12.95.9/14.7	6/15	6/15	6/15		
14	116	265	493	674	233	530	987	1349	1634	1880	2226	796	1480	2023	2450	2821	3208	3338	1973	2697	3267	3761	4278	4451		
	90	203	396	648	180	405	791	1296	-	-	-	608	1187	1944	-	-	-	-	1582	2593	-	-	-	-		
	1.5/3	1.5/3.6	2.7/6.7	3.6/9.1	1.5/3	1.5/3.6	2.7/6.7	3.6/9.1	4.4/11	5.1/12.7	6/15	1.5/3.6	2.7/6.7	3.6/9.1	4.4/11	5.1/12.75.8/14.4	6/15	6/15	2.7/6.7	3.6/9.1	4.4/11	5.1/12.75.8/14.4	6/15	6/15		
15	94	215	423	586	188	429	846	1173	1505	1730	2076	644	1268	1759	2258	2595	2946	3113	1691	2346	3011	3459	3928	4151		
	73	165	322	527	146	329	643	1054	-	-	-	494	965	1581	-	-	-	-	1286	2108	-	-	-	-		
	1.5/3	1.5/3.1	2.5/6.1	3.4/8.5	1.5/3	1.5/3.1	2.5/6.1	3.4/8.5	4.3/10.9	5/12.5	6/15	1.5/3.1	2.5/6.1	3.4/8.5	4.3/10.9	5/12.5	5.7/14.2	6/15	2.5/6.1	3.4/8.5	4.3/10.9	5/12.5	5.7/14.2	6/15		
16	77	176	347	515	153	352	695	1029	1327	1601	1944	528	1042	1544	1990	2402	2723	2917	1389	2058	2653	3202	3630	3889		
	60	136	265	434	121	271	530	868	1296	-	-	407	795	1303	1944	-	-	-	1060	1737	2593	-	-	-		
	1.5/3	1.5/3	2.2/5.4	3.2/7.9	1.5/3	1.5/3	2.2/5.4	3.2/7.9	4.1/10.24.9/12.3	6/15	6/15	1.5/3	2.2/5.4	3.2/7.9	4.1/10.24.9/12.3	5.6/14	6/15	6/15	2.2/5.4	3.2/7.9	4.1/10.24.9/12.3	5.6/14	6/15	6/15		
17	63	146	289	455	127	292	577	910	1173	1468	1829	438	866	1365	1760	2201	2531	2743	1154	1820	2346	2935	3374	3657		
	50	113	221	362	101	226	442	724	1081	-	-	339	663	1086	1621	-	-	-	884	1448	2161	-	-	-		
	1.5/3	1.5/3	1.9/4.8	3/7.5	1.5/3	1.5/3	1.9/4.8	3/7.5	3.9/9.6	4.8/12	6/15	1.5/3	1.9/4.8	3/7.5	3.9/9.6	4.8/12	5.5/13.8	6/15	1.9/4.8	3/7.5	3.9/9.6	4.8/12	5.5/13.8	6/15		
18	53	122	242	399	106	244	484	799	1045	1307	1726	367	726	1198	1567	1961	2364	2588	968	1598	2089	2614	3151	3451		
	42	95	186	305	85	191	372	610	910	1296	-	286	558	915	1366	1944	-	-	744	1220	1821	2593	-	-		
	1.5/3	1.5/3	1.7/4.3	2.8/7	1.5/3	1.5/3	1.7/4.3	2.8/7	3.6/9.1	4.5/11.4	6/15	1.5/3	1.7/4.3	2.8/7	3.6/9.1	4.5/11.45.5/13.7	6/15	6/15	1.7/4.3	2.8/7	3.6/9.1	4.5/11.45.5/13.7	6/15	6/15		
19	103	205	339	89	206	410	677	936	1171	1634	-	310	615	1016	1404	1757	2147	2450	820	1354	1872	2342	2862	3267		
	81	158	259	72	162	316	519	774	1102	-	-	243	475	778	1161	1653	-	-	633	1037	1548	2204	-	-		
	1.5/3	1.5/3.8	2.5/6.3	1.5/3	1.5/3	1.5/3.8	2.5/6.3	3.4/8.6	4.3/10.8	6/15	6/15	1.5/3	1.5/3.8	2.5/6.3	3.4/8.6	4.3/10.85.3/13.1	6/15	6/15	1.5/3.8	2.5/6.3	3.4/8.6	4.3/10.85.3/13.1	6/15	6/15		
20	88	175	289	75	176	350	579	843	1055	1551	-	263	525	868	1265	1583	1934	2326	699	1157	1686	2110	2579	3101		
	69	136	222	62	139	271	445	664	945	-	-	208	407	667	996	1418	-	-	543	889	1327	1890	-	-		
	1.5/3	1.5/3.4	2.3/5.6	1.5/3	1.5/3	1.5/3.4	2.3/5.6	3.3/8.2	4.1/10.2	6/15	6/15	1.5/3	1.5/3.4	2.3/5.6	3.3/8.2	4.1/10.2	5/12.5	6/15	1.5/3.4	2.3/5.6	3.3/8.2	4.1/10.2	5/12.5	6/15		
22	65	130	216	54	130	260	431	649	869	1407	-	194	390	647	973	1303	1593	2111	520	862	1297	1738	2124	2815		
	52	102	167	46	104	204	334	499	710	-	-	157	306	501	748	1065	1461	-	408	668	997	1420	1948	-		
	1.5/3	1.5/3	1.9/4.7	1.5/3	1.5/3	1.5/3	1.9/4.7	2.8/7	3.7/9.3	6/15	6/15	1.5/3	1.5/3	1.9/4.7	2.8/7	3.7/9.3	4.5/11.3	6/15	1.5/3	1.9/4.7	2.8/7	3.7/9.3	4.5/11.3	6/15		
24	99	164	-	-	98	197	329	496	711	1259	-	146	296	493	744	1066	1334	1889	395	658	992	1422	1779	2518		
	79	129	-	-	80	157	257	384	547	-	-	121	236	386	576	820	1125	-	314	515	768	1094	1500	-		
	1.5/3	1.6/3.9	-	-	1.5/3	1.5/3	1.6/3.9	2.3/5.9	3.3/8.3	5.9/14.7	1.5/3	1.5/3	1.6/3.9	2.3/5.9	3.3/8.3	4.2/10.45.9/14.7	1.5/3	1.5/3	1.6/3.9	2.3/5.9	3.3/8.3	4.2/10.45.9/14.7	6/15	6/15		
26	76	128	-	-	75	153	256	387	555	1069	-	112	229	383	580	833	1132	1604	305	511	773	1110	1510	2139		
	62	101	-	-	63	124	202	302	430	1020	-	95	185	304	453	645	885	1529	247	405	604	860	1180	2039		
	1.5/3	1.5/3.3	-	-	1.5/3	1.5/3	1.5/3.3	2/5	2.8/7.1	5.4/13.5	1.5/3	1.5/3	1.5/3.3	2/5	2.8/7.1	3.8/9.6	5.4/13.5	1.5/3	1.5/3.3	2/5	2.8/7.1	<				

VERSA-LAM® Roof Load Tables

VERSA-LAM® 2.0 3100 (125% Load Duration)

KEY TO TABLE

Top Figure	-	Allowable Total Load [plf]
Middle Figure	-	Allowable Live Load [plf]
Bottom Figures	-	Minimum Required Bearing Length at End / Intermediate Supports [inches]


Span [ft]	1½" VERSA-LAM® 2.0 3100				Double Ply 1½" VERSA-LAM® 2.0 3100 or 3½" VERSA-LAM 2.0 3100								Triple Ply 1½" VERSA-LAM® 2.0 3100 or 5½" VERSA-LAM 2.0 3100								Quadruple Ply 1½" VERSA-LAM® 2.0 3100 or 7" VERSA-LAM 2.0 3100					
	7¼"	9½"	11⅝"	14"	7¼"	9½"	11⅝"	14"	16"	18"	24"	9½"	11⅝"	14"	16"	18"	20"	24"	11⅝"	14"	16"	18"	20"	24"		
6	954	1330	1782	2245	1908	2660	3564	4491	5234	5232	5226	3990	5346	6736	7851	7848	7845	7838	7128	8981	10467	10463	10459	10451		
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	2.2/5.5	3.1/7.6	4.1/10.25	1.1/12.9	2.2/5.5	3.1/7.6	4.1/10.25	1.1/12.9	6/15	6/15	6/15	3.1/7.6	4.1/10.25	1.1/12.9	6/15	6/15	6/15	6/15	4.1/10.25	1.1/12.9	6/15	6/15	6/15	6/15		
8	640	933	1225	1511	1279	1867	2449	3022	3611	3919	3913	2800	3674	4532	5417	5879	5876	5870	4899	6043	7222	7838	7834	7826		
	482	-	-	-	965	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	2/4.9	2.9/7.1	3.8/9.4	4.6/11.6	2/4.9	2.9/7.1	3.8/9.4	4.6/11.65	5/13.8	6/15	6/15	2.9/7.1	3.8/9.4	4.6/11.65	5/13.8	6/15	6/15	6/15	3.8/9.4	4.6/11.65	5/13.8	6/15	6/15	6/15		
10	326	693	932	1138	651	1386	1864	2275	2689	3132	3126	2079	2797	3413	4033	4698	4695	4688	3729	4550	5378	6263	6259	6251		
	247	556	-	-	494	1111	-	-	-	-	-	1667	-	-	-	-	-	-	-	-	-	-	-	-		
	1.5/3.1	2.7/6.6	3.6/8.9	4.4/10.9	1.5/3.1	2.7/6.6	3.6/8.9	4.4/10.95	2/12.9	6/15	6/15	2.7/6.6	3.6/8.9	4.4/10.95	2/12.9	6/15	6/15	6/15	3.6/8.9	4.4/10.95	2/12.9	6/15	6/15	6/15		
11	244	552	833	1012	487	1104	1665	2024	2384	2765	2839	1656	2498	3037	3576	4148	4265	4259	3330	4049	4767	5531	5687	5679		
	186	418	815	-	371	835	1631	-	-	-	-	1253	2446	-	-	-	-	-	3262	-	-	-	-	-		
	1.5/3	2.3/5.8	3.5/8.8	4.3/10.7	1.5/3	2.3/5.8	3.5/8.8	4.3/10.7	5/12.6	5.8/14.6	6/15	2.3/5.8	3.5/8.8	4.3/10.7	5/12.6	5.8/14.6	6/15	6/15	3.5/8.8	4.3/10.7	5/12.6	5.8/14.6	6/15	6/15		
12	187	424	733	912	374	848	1465	1823	2141	2475	2601	1272	2198	2735	3211	3713	3907	3901	2931	3647	4281	4951	5209	5201		
	143	322	628	-	286	643	1256	-	-	-	-	965	1884	-	-	-	-	-	2512	-	-	-	-	-		
	1.5/3	2/4.9	3.4/8.4	4.2/10.5	1.5/3	2/4.9	3.4/8.4	4.2/10.54	9/12.35	7/14.3	6/15	2/4.9	3.4/8.4	4.2/10.54	9/12.35	7/14.3	6/15	6/15	3.4/8.4	4.2/10.54	9/12.35	7/14.3	6/15	6/15		
13	146	332	623	829	292	665	1247	1658	1942	2240	2399	997	1870	2487	2913	3360	3604	3598	2494	3316	3884	4480	4806	4797		
	112	253	494	810	225	506	988	1619	-	-	-	759	1482	2429	-	-	-	-	1976	3238	-	-	-	-		
	1.5/3	1.7/4.2	3.1/7.8	4.1/10.4	1.5/3	1.7/4.2	3.1/7.8	4.1/10.44	8/12.1	5.6/14	6/15	1.7/4.2	3.1/7.8	4.1/10.44	8/12.1	5.6/14	6/15	6/15	3.1/7.8	4.1/10.44	8/12.1	5.6/14	6/15	6/15		
14	116	265	521	734	233	530	1043	1467	1777	2046	2226	796	1564	2201	2666	3068	3345	3338	2085	2934	3554	4091	4459	4451		
	90	203	396	648	180	405	791	1296	-	-	-	608	1187	1944	-	-	-	-	1582	2593	-	-	-	-		
	1.5/3	1.5/3.6	2.8/7	4/9.9	1.5/3	1.5/3.6	2.8/7	4/9.9	4.8/12	5.5/13.8	6/15	1.5/3.6	2.8/7	4/9.9	4.8/12	5.5/13.8	6/15	6/15	2.8/7	4/9.9	4.8/12	5.5/13.8	6/15	6/15		
15	94	215	423	638	188	429	846	1276	1638	1882	2076	644	1268	1914	2456	2823	3120	3113	1691	2552	3275	3763	4159	4151		
	73	165	322	527	146	329	643	1054	1573	-	-	494	965	1581	2360	-	-	-	1286	2108	3146	-	-	-		
	1.5/3	1.5/3.1	2.5/6.1	3.7/9.2	1.5/3	1.5/3.1	2.5/6.1	3.7/9.2	4.7/11.85	4/13.6	6/15	1.5/3.1	2.5/6.1	3.7/9.2	4.7/11.85	4/13.6	6/15	6/15	2.5/6.1	3.7/9.2	4.7/11.85	4/13.6	6/15	6/15		
16	77	176	347	560	153	352	695	1120	1443	1742	1944	528	1042	1680	2165	2613	2923	2917	1389	2240	2887	3484	3897	3889		
	60	136	265	434	121	271	530	868	1296	-	-	407	795	1303	1944	-	-	-	1060	1737	2593	-	-	-		
	1.5/3	1.5/3	2.2/5.4	3.5/8.6	1.5/3	1.5/3	2.2/5.4	3.5/8.6	4.4/11.15	4/13.4	6/15	1.5/3	2.2/5.4	3.5/8.6	4.4/11.15	4/13.4	6/15	6/15	2.2/5.4	3.5/8.6	4.4/11.15	4/13.4	6/15	6/15		
17	63	146	289	476	127	292	577	951	1277	1597	1829	438	866	1427	1915	2395	2749	2743	1154	1902	2553	3193	3665	3657		
	50	113	221	362	101	226	442	724	1081	1539	-	339	663	1086	1621	2308	-	-	884	1448	2161	3078	-	-		
	1.5/3	1.5/3	1.9/4.8	3.1/7.8	1.5/3	1.5/3	1.9/4.8	3.1/7.8	4.2/10.55	2/13.1	6/15	1.5/3	1.9/4.8	3.1/7.8	4.2/10.55	2/13.1	6/15	6/15	1.9/4.8	3.1/7.8	4.2/10.55	2/13.1	6/15	6/15		
18	53	122	242	399	106	244	484	799	1137	1422	1726	367	726	1198	1705	2133	2572	2588	968	1598	2274	2845	3429	3451		
	42	95	186	305	85	191	372	610	910	1296	-	286	558	915	1366	1944	-	-	744	1220	1821	2593	-	-		
	1.5/3	1.5/3	1.7/4.3	2.8/7	1.5/3	1.5/3	1.7/4.3	2.8/7	4/9.9	4.9/12.3	6/15	1.5/3	1.7/4.3	2.8/7	4/9.9	4.9/12.35	9/14.9	6/15	1.7/4.3	2.8/7	4/9.9	4.9/12.35	9/14.9	6/15		
19	103	205	339	89	206	410	677	1016	1275	1634	310	615	1016	1524	1912	2336	2450	820	1354	2032	2549	3115	3267			
	81	158	259	72	162	316	519	774	1102	-	243	475	778	1161	1653	2268	-	-	633	1037	1548	2204	3024	-		
	1.5/3	1.5/3.8	2.5/6.3	1.5/3	1.5/3	1.5/3.8	2.5/6.3	3.7/9.3	4.7/11.7	6/15	1.5/3	1.5/3.8	2.5/6.3	3.7/9.3	4.7/11.75	7/14.3	6/15	6/15	1.5/3.8	2.5/6.3	3.7/9.3	4.7/11.75	7/14.3	6/15		
20	88	175	289	75	176	350	579	869	1149	1551	263	525	868	1303	1723	2105	2326	699	1157	1737	2297	2807	3101			
	69	136	222	62	139	271	445	664	945	-	208	407	667	996	1418	1944	-	-	543	889	1327	1890	2593	-		
	1.5/3	1.5/3.4	2.3/5.6	1.5/3	1.5/3	1.5/3.4	2.3/5.6	3.4/8.4	4.4/11.1	6/15	1.5/3	1.5/3.4	2.3/5.6	3.4/8.4	4.4/11.15	4/13.6	6/15	6/15	1.5/3.4	2.3/5.6	3.4/8.4	4.4/11.15	4/13.6	6/15		
22	65	130	216	54	130	260	431	649	928	1407	194	390	647	973	1393	1735	2111	520	862	1297	1857	2313	2815			
	52	102	167	46	104	204	334	499	710	-	157	306	501	748	1065	1461	-	-	408	668	997	1420	1948	-		
	1.5/3	1.5/3	1.9/4.7	1.5/3	1.5/3	1.5/3	1.9/4.7	2.8/7	4/9.9	6/15	1.5/3	1.5/3	1.9/4.7	2.8/7	4/9.9	4.9/12.3	6/15	6/15	1.5/3	1.9/4.7	2.8/7	4/9.9	4.9/12.3	6/15		
24	99	164	-	-	98	197	329	496	711	1288	146	296	493	744	1066	1453	1932	395	658	992	1422	1937	2576			
	79	129	-	-	80	157	257	384	547	-	121	236	386	576	820	1125	-	-	314	515	768	1094	1500	-		
	1.5/3	1.6/3.9	-	-	1.5/3	1.5/3	1.6/3.9	2.3/5.9	3.3/8.3	6/15	1.5/3	1.5/3	1.6/3.9	2.3/5.9	3.3/8.3	4.5/11.3	6/15	6/15	1.5/3	1.6/3.9	2.3/5.9	3.3/8.3	4.5/11.3	6/15		
26	76	128	-	-	75	153	256	387	555	1164	112	229	383	580	833	1150	1747	305	511	773	1110	1533	2329			
	62	101	-	-	63	124	202	302	430	1020	95	185	304	453	645	885	1529	247	405	604	860	1180	2039			
	1.5/3	1.5/3.3	-	-	1.5/3	1.5/3	1.5/3.3	2/5	2.8/7.1	5.9/14.7	1.5/3	1.5/3	1.5/3.3	2/5	2.8/7.1	3.9/9.7	5.9/14.7	1.5/3	1.5/3.3	2/5	2.8/7.1	3.9/9.7	5.9/14.7			
28	60	101	-	-	58	120	202	306	441	1001	87	180	303	459	661											

Closest Allowable Nail Spacing

VERSA-LAM® & VERSA-RIM® Products

Nail Size	Nailing Parallel to Glue Lines (Narrow Face) ⁽¹⁾						Nailing Perpendicular to Glue Lines (Wide Face)	
	VERSA-LAM® 1.4 1800 Rimboard 1 5/16"		VERSA-LAM® 1 3/4"		VERSA-LAM® 3 1/2" & Wider		All Products	
	O.C. [inches]	End [inches]	O.C. [inches]	End [inches]	O.C. [inches]	End [inches]	O.C. [inches]	End [inches]
8d Box	3	1 1/2	2	1	2	1 1/2	2	1 1/2
8d Common	3	2	3	2	2	1	2	1
10d & 12d Box	3	2	3	2	2	1	2	1
16d Box	3	2	3	2	2	1	2	1
10d & 12d Common	4	3	4	3	2	2	2	2
16d Sinker	4	3	4	3	2	2	2	2
16d Common	6	4	6	3	2	2	2	2

Nailing Parallel to
Glue Lines
(Narrow Face)



Nailing Perpendicular to
Glue Lines (Wide Face)

Nailing Notes

- For 1 1/4" thickness and greater, 2 rows of nails (such as for a metal strap) are allowed (use 1/2" minimum offset between rows and stagger nails).

- Offset and stagger nail rows from floor sheathing and wall sole plate.
- Simpson Strong-Tie A35 and LPT4 connectors may be attached to the side VERSA-LAM®/VERSA-RIM®. Use nails as specified by Simpson Strong-Tie.

VERSA-LAM® Design Values

Grade	Width [in]	Depth [in]	Weight [lb/ft]	Allowable Shear [lb]	Allowable Moment [ft-lb]	Moment of Inertia [in ⁴]
VERSA-STUD® 1.7 2650	1 1/2	3 1/2	1.5	998	776	5.4
		5 1/2	2.4	1568	1821	20.8
		7 1/4	3.2	2066	3069	47.6
VERSA-LAM® 2.0 3100	1 3/4	3 1/2	1.8	1164	1058	6.3
		5 1/2	2.8	1829	2486	24.3
		7 1/4	3.7	2411	4189	55.6
		9 1/4	4.7	3076	6636	115.4
		9 1/2	4.8	3159	6979	125.0
		11 1/4	5.7	3741	9605	207.6
		11 5/8	6.0	3948	10638	244.2
		14	7.1	4655	14517	400.2
		16	8.1	5320	18682	597.3
		18	9.1	5985	23337	850.5
		24	12.2	7980	40183	2016.0
	3 1/2	5 1/2	5.6	3658	4971	48.5
		7 1/4	7.4	4821	8377	111.1
		9 1/4	9.4	6151	13272	230.8
		9 1/2	9.6	6318	13958	250.1
		11 1/4	11.4	7481	19210	415.3
		11 5/8	12.1	7897	21275	488.4
		14	14.2	9310	29035	800.3
		16	16.2	10640	37364	1194.7
		18	18.3	11970	46674	1701.0
		20	20.3	13300	56952	2333.3
VERSA-LAM® 2.0 3100	5 1/4	5 1/4	8.0	5237	6830	63.3
		5 1/2	8.4	5486	7457	72.8
		7 1/4	11.0	7232	12566	166.7
		9 1/4	14.1	9227	19908	346.3
		9 1/2	14.5	9476	20937	375.1
		11 1/4	17.1	11222	28814	622.9
		11 5/8	18.1	11845	31913	732.6
		14	21.3	13965	43552	1200.5
		16	24.4	15960	56046	1792.0
		18	27.4	17955	70011	2551.5
		20	30.4	19950	85428	3500.0
		24	36.5	23940	120549	6048.0
	7	9 1/4	16.6	12303	26544	461.7
		9 1/2	17.1	12635	27916	500.1
		11 1/4	20.2	14963	38419	830.6
		11 5/8	21.4	15794	42550	976.8
		14	25.2	18620	58069	1600.7
		16	28.8	21280	74728	2389.3
		18	32.4	23940	93348	3402.0
		20	36.0	26600	113904	4666.7
		24	43.2	31920	160732	8064.0

Design Property	Grade	Modulus of Elasticity	Bending	Horizontal Shear	Tension Parallel to Grain	Compression Parallel to Grain	Compression Perpendicular to Grain	Equivalent Specific Gravity for Fastener Design
		E (x 10 ⁶ psi) ⁽¹⁾	F _b (psi) ⁽²⁾⁽³⁾	F _v (psi) ⁽²⁾⁽⁴⁾	F _t (psi) ⁽²⁾⁽⁵⁾	F _c (psi) ⁽²⁾	F _{c⊥} (psi) ⁽¹⁾⁽⁶⁾	(SG)
VERSA-LAM® Beams	2.0 3100	2.0	3100	285	2150	3000	750	0.5
VERSA-LAM® Studs	1.7 2650	1.7	2650	285	1650	3000	750	0.5
VERSA-LAM® Columns	1.8 2750	1.8	2750	285	1825	3000	750	0.5

- This value cannot be adjusted for load duration.
- This value is based upon a load duration of 100% and may be adjusted for other load durations.
- Fiber stress bending value shall be multiplied by the depth factor, (12/d)^{1/9} where d = member depth [in].
- Stress applied perpendicular to the glue lines.
- Tension value shall be multiplied by a length factor, (4/L)^{1/8} where L = member length [ft]. Use L = 4 for members less than four feet long.
- Stress applied parallel to the glue lines.

* Design properties are limited to dry conditions of use where the maximum moisture content of the material will not exceed 16%.

VERSA-LAM® 1.8 2750 Columns

Column Length [ft]	Allowable Axial Load (lb)														
	3 1/2" x 3 1/2"			3 1/2" x 4 3/8"			3 1/2" x 5 1/4"			3 1/2" x 5 1/2"			3 1/2" x 7"		
	100%	115%	125%	100%	115%	125%	100%	115%	125%	100%	115%	125%	100%	115%	125%
4	15,265	16,750	17,650	19,100	20,950	22,070	22,920	25,150	26,500	24,020	26,350	27,770	30,570	33,545	35,345
5	12,830	13,770	14,320	16,050	17,220	17,910	19,260	20,670	21,505	20,185	21,660	22,530	25,690	27,580	28,680
6	10,580	11,190	11,540	13,240	13,990	14,440	15,890	16,800	17,335	16,645	17,605	18,165	21,190	22,410	23,120
7	8,745	9,160	9,400	10,940	11,460	11,760	13,130	13,760	14,120	13,755	14,410	14,795	17,510	18,350	18,835
8	7,295	7,590	7,765	9,120	9,490	9,710	10,950	11,400	11,660	11,475	11,945	12,215	14,610	15,210	15,555
9	6,155	6,375	6,500	7,700	7,970	8,130	9,245	9,575	9,765	9,685	10,030	10,230	12,330	12,770	13,025
10	5,250	5,415	5,510	6,570	6,770	6,890	7,885	8,135	8,280	8,260	8,525	8,675	10,520	10,850	11,040
11	4,525	4,655	4,730	5,660	5,820	5,910	6,795	6,990	7,100	7,120	7,325	7,440	9,065	9,325	9,475
12	3,935	4,040	4,095	4,920	5,050	5,120	5,910	6,065	6,150	6,195	6,355	6,445	7,885	8,090	8,210
13	3,455	3,535	3,580	4,320	4,420	4,480	5,185	5,310	5,380	5,435	5,565	5,635	6,920	7,080	7,175
14	3,050	3,120	3,155	3,820	3,900	3,950	4,585	4,685	4,740	4,805	4,905	4,965	6,115	6,250	6,325
	3 1/2" x 7 1/4"			5 1/4" x 5 1/4"			5 1/4" x 5 1/2"			5 1/4" x 7"			5 1/4" x 7 1/4"		
	100%	115%	125%	100%	115%	125%	100%	115%	125%	100%	115%	125%	100%	115%	125%
4	31,670	34,750	36,625												
5	26,615	28,560	29,705												
6	21,950	23,215	23,950	34,355	37,695	39,715	36,010	39,495	41,610						
7	18,140	19,005	19,505	30,700	33,170	34,625	32,165	34,750	36,280						
8	15,135	15,755	16,110	27,095	28,910	29,975	28,390	30,295	31,405	36,160	38,590	40,000	37,450	39,960	41,420
9	12,770	13,225	13,490	23,815	25,180	25,980	24,950	26,385	27,220	31,770	33,600	34,670	32,910	34,800	35,910
10	10,895	11,240	11,440	20,950	22,005	22,620	21,950	23,060	23,700	27,950	29,360	30,190	28,960	30,420	31,260
11	9,390	9,660	9,810	18,500	19,340	19,820	19,385	20,260	20,770	24,690	25,810	26,450	25,570	26,720	27,400
12	8,170	8,380	8,500	16,420	17,085	17,475	17,200	17,910	18,305	21,910	22,800	23,320	22,690	23,620	24,150
13	7,165	7,335	7,430	14,640	15,185	15,500	15,340	15,910	16,240	19,540	20,270	20,680	20,230	20,990	21,430
14	6,335	6,470	6,550	13,120	13,570	13,830	13,750	14,220	14,490	17,510	18,110	18,460	18,140	18,760	19,110
15				11,820	12,195	12,405	12,385	12,775	13,000	15,770	16,270	16,560	16,330	16,850	17,150
16				10,690	11,005	11,185	11,200	11,530	11,720	14,270	14,690	14,930	14,780	15,210	15,460
17				9,715	9,980	10,135	10,180	10,460	10,620	12,960	13,320	13,520	13,420	13,790	14,010
18				8,860	9,090	9,220	9,285	9,525	9,660	11,820	12,130	12,300	12,250	12,560	12,740
19				8,110	8,310	8,420	8,500	8,705	8,825	10,820	11,090	11,240	11,210	11,480	11,640
20				7,455	7,625	7,720	7,810	7,990	8,090	9,950	10,170	10,300	10,300	10,540	10,670
21				6,870	7,020	7,105	7,195	7,355	7,445	9,170	9,370	9,480	9,490	9,700	9,820
22															

Allowable Design Stresses

Modulus of Elasticity: $E = 1.8 \times 10^6$ psi

Bending: Parallel to Gluelines (Beam): $F_b = 2750 \cdot (12/d)^{1/9}$ psi

Perp to Gluelines (Plank): $F_b = 2500 \cdot (12/d)^{1/9}$ psi

Compression Parallel to Grain: $F_{c||} = 3000$ psi

Compression Perpendicular to Grain:

Parallel to Gluelines (Beam): $F_{c\perp} = 750$ psi

Perp to Gluelines (Plank): $F_{c\perp} = 450$ psi

Tension Parallel to Grain: $F_t = 1650$ psi

Notes

- Table assumes that the column is braced at column ends only. Effective column length is equal to actual column length.
- Allowable loads are based upon one-piece (solid) column members used in dry service conditions. Contact project's design professional of record or Boise Cascade EWP Engineering for multi-piece column design.
- Allowable loads are based on an eccentricity value equal to 0.167 multiplied by either the column thickness or width (worst case).
- Allowable loads are based on axial loaded columns using the design provisions of the National Design Specification for Wood Construction (NDS), 2005 edition. For side or other combined bending and axial loads, see provisions of NDS, 2005 edition.
- Load values are not shown for short lengths due to loads exceeding common connector capacities. Load values are not shown for longer lengths if the controlling slenderness ratio exceeds 50 (per NDS).
- Wind loads are not considered in this table: analyze such conditions with BC CALC® software.

VERSA-STUD® 1.7 2650

Allowable Design Values

Product	Bending F_b [psi]	Compression Parallel to Grain F_c [psi]	Modulus of Elasticity E [psi]	Horizontal Shear F_v [psi]
VERSA-STUD® 1.7 2650	2650	3000	1,700,000	285
Spruce Pine Fir (North) # 1 / 2 Grade	875	1150	1,400,000	135
Hem-Fir # 2 Grade	850	1300	1,300,000	150
Western Woods # 2 Grade	675	900	1,000,000	135

Notes:

- Design values are for loads applied to the narrow face of the studs.
- Dimension lumber values taken from 2005 Edition, *NDS Design Values for Wood Construction* (per 2006 IBC/IRC).

- Repetitive member and size factors have not been applied.

For further design information, please see *VERSA-STUD® 1.7 2650 Eastern Tall Wall Guide*.



New BC FRAMER® represents a huge technological leap to help you improve the efficiency and profitability of your engineered wood products business. Boise Cascade will provide you what we believe is now the industry's best design software, offering far greater productivity than even our current version of BC FRAMER®. This new software package will help your design department work faster and accomplish more. You don't get paid to do drawings, but at least now you can do them in less time, and better.

- Shrink design time with BC FRAMER® model sharing.
- Save time & prevent mistakes with best-in-industry file integration.
- Experience the efficiencies of BC FRAMER® whole house modeling.
- Draw floor and wall plans simultaneously with BC FRAMER®.
- Check the plan every possible way with BC FRAMER® full 3-D viewer.
- Create a master plan and multiple options that can be quickly selected and exported to a plot-specific file in a few minutes – a fraction of the time it could have taken in the past.



Information can also be obtained at 1-800-405-5969 or email us at EWPSupport@BC.com.

BC CALC® 4.0 Sizing Software

BC CALC® is simple to use, yet robust enough to analyze most all joist, beam, and column applications. Once an analysis is run, the user may print an easy-to-read design report that displays the span and load information with the analysis results.

BC COLUMN® has now been merged into BC CALC®, allowing the sizing of joists, beams, rafters, columns, and studs all in one convenient program.

In addition to BCI® & AJS® Joists, VERSA-LAM®, and BOISE GLULAM®, BC CALC® also offers the analysis of solid sawn lumber and timber members. Thus BC CALC® is the only program needed to analyze structural wood members.

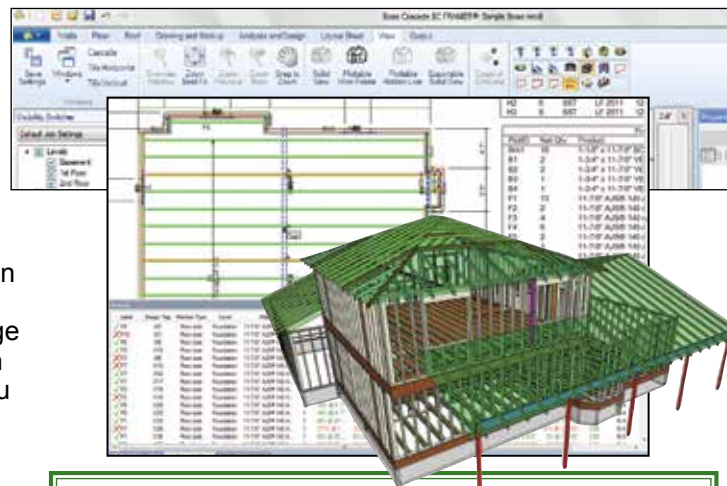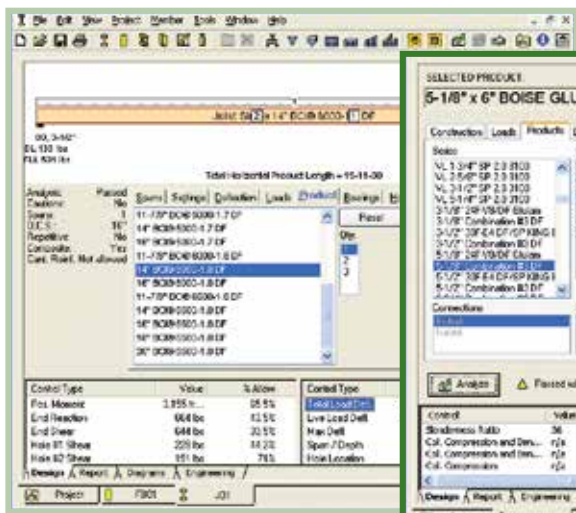

RECOMMENDED HARDWARE

- **CPU:** Quad Core 64 bit Processor
- **L2 Cache:** 3MB/Core
- **RAM:** 4.0GB to 8.0GB
- **Video:** Full support for DirectX 9; Single monitors, 1280x1024 128MB; Dual monitor, 1280x1024 256MB (Minimum 1024x768)
- **Operating Systems:** Windows® 7 or 8 (Professional Editions 32-bit and 64-bit)

Actual specifications vary by user and will be assessed prior to installation.



Give Us
a Try!



Boise Cascade has provided BC CALC® free of charge to the design community since 1994.

COMPUTER REQUIREMENTS

PC with any current version of MS Windows®, along with an internet connection. For questions regarding BC CALC®, call 1-800-405-5969 or email EWPSupport@BC.com.

To Download BC CALC US,


<http://www.bc.com/wood/ewp/software/bccalc.html>

Reaction	Line	Rear	Stair	Value	Rear Line
BC, 3-1/2"		4,826.0	7,342.0		
		4,815.0	7,326.0		

Load Summary	Line Type	Unit Area (lb/ft²)	Ref. Span	Rear	Stair	Value	Rear Line	Stair Line	Notes
Standard Load		1.0	10.00	10.00	10.00	10.00	10.00	10.00	10.00


Controls Summary	Value	% Allow	Material	Notes
PCL Moment	10,000.00	115%	4	10-00-24
Rear Shear	10,000.00	115%	4	10-00-24
Total Load Defl	1.000 (1.000)	100%	4	10-00-24
Line Load Defl	1.000 (1.000)	100%	4	10-00-24
Span Defl	1.000	100%	4	10-00-24

Single Joist - Top Flange

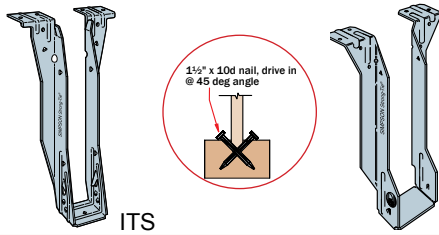


Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	20/140/ 150/190	ITS2.56/9.5	1006	6-10d	—
	25	ITS3.56/9.5	1006	6-10d	—
11⅞"	20/140/ 150/190	ITS2.56/11.88	1020	6-10d	—
	25	ITS3.56/11.88	1020	6-10d	—
14"	20/140/ 150/190	ITS2.56/14	1032	6-10d	—
	25	ITS3.56/14	1032	6-10d	—
16"	20/140/ 150/190	ITS2.56/16	1048	6-10d	—
	25	ITS3.56/16	1048	6-10d	—

Single Joist - Face Mount




Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	20/140/ 150/190	IUS2.56/9.5	950	8-10d	—
	25	IUS3.56/9.5	1006	10-10d	—
11⅞"	20/140/ 150/190	IUS2.56/11.88	1020	10-10d	—
	25	IUS3.56/11.88	1020	12-10d	—
14"	20/140/ 150/190	IUS2.56/14	1032	12-10d	—
	25	IUS3.56/14	1032	12-10d	—
16"	20/140/ 150/190	IUS2.56/16	1048	14-10d	—
	25	IUS3.56/16	1048	14-10d	—

Double Joist - Top Flange



Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	20/140/ 150/190	MIT39.5-2	2125	8-16d	2-10dx1½"
	25	B7.12/9.5	2720	14-16d	6-16d
11⅞"	20/140/ 150/190	MIT311.88-2	2170	8-16d	2-10dx1½"
	25	B7.12/11.88	2930	14-16d	6-16d
14"	20/140/ 150/190	MIT314-2	2210	8-16d	2-10dx1½"
	25	B7.12/14	3120	14-16d	6-16d
16"	20/140/ 150/190	MIT5.12/16	2255	8-16d	2-10dx1½"
	25	B7.12/16	3305	14-16d	6-16d

Double Joist - Face Mount

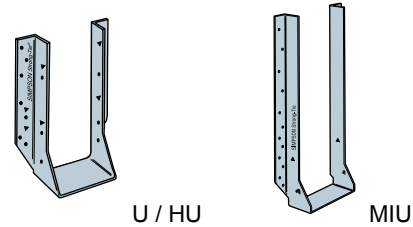


Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	20/140/ 150/190	MIU5.12/9	2125	16-16d	2-10dx1½"
	25	HU410-2	2680	18-16d	8-16d
11⅞"	20/140/ 150/190	MIU5.12/11	2170	20-16d	2-10dx1½"
	25	HU412-2	2930	22-16d	8-16d
14"	20/140/ 150/190	MIU5.12/14	2210	22-16d	2-10dx1½"
	25	HU414-2	3120	26-16d	12-16d
16"	20/140/ 150/190	MIU5.12/16	2255	24-16d	2-10dx1½"
	25	HU414-2	3305	26-16d	12-16d

Face Mount Skewed 45° Joist Hanger



Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	SUR/L2.56/9	1139	14-16d	2-10dx1½"
	25	SUR/L410	1076	14-16d	6-16d
11⅞"	140/150 20/190	SUR/L2.56/11	1174	16-16d	2-10dx1½"
	25	SUR/L410	1101	14-16d	6-16d
14"	140/150 20/190	SUR/L2.56/14	1204	18-16d	2-10dx1½"
	25	SUR/L414	1123	18-16d	8-16d
16"	140/150 20/190	SUR/L2.56/14	1235	18-16d	2-10dx1½"
	25	SUR/L414	1127	18-16d	8-16d

Field Slope and Skew Joist Hanger





Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	LSSUH310	1480	14-10d	12-10dx1½"
	25	LSSU410	1480	14-10d	12-10dx1½"
11⅞"	140/150 20/190	LSSUH310	1595	14-10d	12-10dx1½"
	25	LSSU410	1595	14-10d	12-10dx1½"
14"	140/150 20/190	LSSUH310	1600	14-10d	12-10dx1½"
	25	LSSU410	1625	14-10d	12-10dx1½"
16"	140/150 20/190	—	—	—	—
	25	—	—	—	—

Adjustable Height Joist Hanger



Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	THAI322	1330	6-10d	2-10dx1½"
	25	THAI422	1330	6-10d	2-10dx1½"
11⅞"	140/150 20/190	THAI322	1432	6-10d	2-10dx1½"
	25	THAI422	1432	6-10d	2-10dx1½"
14"	140/150 20/190	THAI322	1525	6-10d	2-10dx1½"
	25	THAI422	1525	6-10d	2-10dx1½"
16"	140/150 20/190	—	—	—	—
	25	—	—	—	—

Variable Pitch Joist Connector



Joist Depth	AJS®	Hanger	Capacity [lbs]	Fastener	
				Top Plate	Rafter
9½"	140/150 20/190	VPA3	1006	9-10d	2-10dx1½"
	25	VPA4	1006	11-10d	2-10dx1½"
11⅞"	140/150 20/190	VPA3	1020	9-10d	2-10dx1½"
	25	VPA4	1020	11-10d	2-10dx1½"
14"	140/150 20/190	VPA3	1032	9-10d	2-10dx1½"
	25	VPA4	1032	11-10d	2-10dx1½"
16"	140/150 20/190	VPA3	1048	9-10d	2-10dx1½"
	25	VPA4	1048	11-10d	2-10dx1½"

SIMPSON

Strong-Tie®
CONNECTORS

For more information, call
Simpson Strong-Tie®
at 1-800-999-5099 or visit
their website at
www.strongtie.com

General Notes


- **Bold Italic hangers require web stiffeners.**
- Capacities will vary with different nailing criteria and/or support conditions; contact supplier or Simpson Strong-Tie® for further information.
- Capacity values shown are either hanger capacity values (see support requirements below) or AJS® Joist end reaction capacities — whichever is less.
- All capacity values are downward loads at 100% load duration.
- Use sloped seat hangers and beveled web stiffeners when AJS® Joist slope exceeds 1/4" per foot.
- Leave 1/16" clearance (1/8" maximum) between the end of the supported joist and the head of the hanger.

- At max design capacity shown, hangers may exceed standard 1/32" deflection by 1/32".
- For proper installation of the VPA, the 2-10dx1½" joist nails through the bend tabs must be installed at approximately a 45-degree angle.

Support Requirements


- **Support material assumed to be Boise Cascade structural composite lumber or sawn lumber (Douglas fir or southern pine species).**
- Minimum support width for single- and double-joist top mount hangers is 3".
- Minimum support width for face mount hangers with 10d and 16d nails is 1½" and 2", respectively.

Single Joist - Top Flange




Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	TFL2595	1006	6-10d	2-10dx1½"
	25	THO35950	1048	10-10d	2-10dx1½"
11⅞"	140/150 20/190	TFL25118	1020	6-10d	2-10dx1½"
	25	THO35118	1068	10-10d	2-10dx1½"
14"	140/150 20/190	TFL2514	1032	6-10d	2-10dx1½"
	25	THO35140	1086	12-10d	2-10dx1½"
16"	140/150 20/190	TFL2516	1048	6-10d	2-10dx1½"
	25	THO35160	1107	12-10d	2-10dx1½"

Single Joist - Face Mount




Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	THF25925	1062	12-10d	2-10dx1½"
	25	THF35925	1062	12-10d	2-10dx1½"
11⅞"	140/150 20/190	THF25112	1085	14-10d	2-10dx1½"
	25	THF35112	1085	16-10d	2-10dx1½"
14"	140/150 20/190	THF25140	1105	18-10d	2-10dx1½"
	25	THF35140	1105	20-10d	2-10dx1½"
16"	140/150 20/190	THF25160	1127	22-10d	2-10dx1½"
	25	THF35157	1127	22-10d	2-10dx1½"

Double Joist - Top Flange

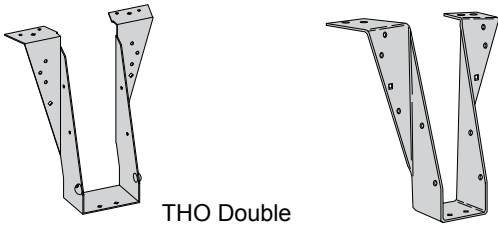


Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	THO25950-2	2237	10-16d	6-10d
	25	BPH7195	2690	10-16d	6-10d
11⅞"	140/150 20/190	THO25118-2	2300	10-16d	6-10d
	25	BPH71118	3060	10-16d	6-10d
14"	140/150 20/190	THO25140-2	2355	12-16d	6-10d
	25	BPH7114	3260	10-16d	6-10d
16"	140/150 20/190	THO25160-2	2412	12-16d	6-10d
	25	BPH7116	3452	10-16d	6-10d

Double Joist - Face Mount

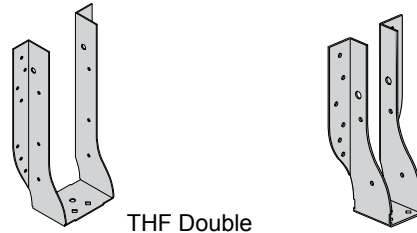


Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	THF25925-2	1390	12-10d	6-10d
	25	HD7100	1690	12-10d	6-10d
11⅞"	140/150 20/190	THF25112-2	1855	16-10d	6-10d
	25	HD7120	2255	16-10d	6-10d
14"	140/150 20/190	THF25140-2	2210	20-10d	6-10d
	25	HD7140	2820	20-10d	8-10d
16"	140/150 20/190	THF25160-2	2255	24-10d	8-10d
	25	HD7160	3305	24-10d	8-10d

Face Mount Skewed 45° Joist Hanger




Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	SKH2520L/R	992	14-10d	10-10dx1½"
	25	SKH410L/R	1062	16-16d	10-16d
11⅞"	140/150 20/190	SKH2520L/R	1003	14-10d	10-10dx1½"
	25	SKH410L/R	1085	16-16d	10-16d
14"	140/150 20/190	SKH2524L/R	1014	16-10d	10-10dx1½"
	25	SKH414L/R	1105	22-16d	10-16d
16"	140/150 20/190	SKH2524L/R	1029	16-10d	10-10dx1½"
	25	SKH414L/R	1127	22-16d	10-16d

Field Slope and Skew Joist Hanger




Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	LSSH25	1420	14-16d	12-10dx1½"
	25	LSSH35	1420	14-16d	12-10dx1½"
11⅞"	140/150 20/190	LSSH25	1530	14-16d	12-10dx1½"
	25	LSSH35	1530	14-16d	12-10dx1½"
14"	140/150 20/190	LSSH25	1630	14-16d	12-10dx1½"
	25	LSSH35	1630	14-16d	12-10dx1½"
16"	140/150 20/190	LSSH35	1725	14-16d	12-10dx1½"
	25	LSSH35	1725	14-16d	12-10dx1½"

Adjustable Height Joist Hanger



Joist Depth	AJS®	Hanger	Capacity [lbs]	Nailing	
				Header	Joist
9½"	140/150 20/190	MSH322	1270	16-10d	4-10dx1½"
	25	MSH422IF	1270	22-10d	4-10d
11⅞"	140/150 20/190	MSH322	1367	16-10d	4-10dx1½"
	25	MSH422IF	1367	22-10d	4-10d
14"	140/150 20/190	MSH322	1455	16-10d	4-10dx1½"
	25	MSH422IF	1455	22-10d	4-10d
16"	140/150 20/190	MSH322	1413	16-10d	4-10dx1½"
	25	MSH422IF	1413	22-10d	4-10d

Variable Pitch Joist Connector



Joist Depth	AJS®	Hanger	Capacity [lbs]	Fastener	
				Top Plate	Rafter
9½"	140/150 20/190	TMP25	1175	6-10d	4-10dx1½"
	25	TMP4	1175	6-10d	4-10dx1½"
11⅞"	140/150 20/190	TMP25	1215	6-10d	4-10dx1½"
	25	TMP4	1215	6-10d	4-10dx1½"
14"	140/150 20/190	TMP25	1250	6-10d	4-10dx1½"
	25	TMP4	1250	6-10d	4-10dx1½"
16"	140/150 20/190	TMP25	1285	6-10d	4-10dx1½"
	25	TMP4	1285	6-10d	4-10dx1½"



For more information,
contact USP Structural Connectors®
at 1-800-328-5934 or
www.uspconnectors.com

General Notes

- **Bold Italic hangers required web stiffeners.**
- Capacities will vary with different nailing criteria and/or support conditions: contact supplier or USP Structural Connectors® for further information.
- Capacity values shown are either hanger capacity values (see support requirements below) or AJS® Joist end reaction capacities — whichever is less.
- All capacity values are downward loads at 100% load duration.
- Use sloped seat hangers and beveled web stiffeners when AJS® Joist slope exceeds ¼" per foot.
- Leave ⅛" clearance (⅞" maximum) between the end of the supported joist and the head of the hanger.

- For applications where AJS® is used as a beam to support joist hangers, consult USP Structural Connectors® for capacity reduction.

Support Requirements

- **Support material assumed to be Boise Cascade structural composite lumber or sawn lumber (Douglas fir or southern pine species).**
- Minimum support width for single- and double-joist top mount hangers is 3": (1½" for THO hangers).
- Minimum support width for face mount hangers with 10d and 16d nails is 1¼" and 2", respectively.



Boise Cascade has a proven track record of providing quality wood products and a nationwide building materials distribution network for our customers, helping them to enhance their own businesses.

Boise Cascade Engineered Wood Products build better homes with stronger, stiffer floors using only wood purchased in compliance with a number of green building programs. Take a moment to view our sustainability certification site at <http://www.bc.com/sustainability/certification.html> or view our green brochure at http://www.bc.com/wood/ewp/Boise_EWP_Green.html.

Boise Cascade Engineered Wood Products throughout North America can now be ordered FSC® Chain-of-Custody (COC) certified, enabling homebuilders to achieve LEED® points under U.S. Green Building Council® residential and commercial green building programs including LEED for Homes and LEED for New Construction. Boise Cascade Engineered Wood Products are available as PEFC® Chain-of-Custody certified, SFI® Chain-of-Custody certified and SFI Fiber-Sourcing certified, as well as NAHB Research Center Green Approved, enabling homebuilders to also obtain green building points through the National Green Building Standard.

Lifetime Guaranteed Quality and Performance

Boise Cascade warrants its BCI® Joist, VERSA-LAM®, and ALLJOIST® products to comply with our specifications, to be free from defects in material and workmanship, and to meet or exceed our performance specifications for the normal and expected life of the structure when correctly stored, installed and used according to our Installation Guide.

If in doubt ask! For the closest Boise Cascade EWP distributor/support center, call

★ 1-800-232-0788 ★



BOISE CASCADE, TREE-IN-A-CIRCLE, BCI, BC CALC, BC COLUMN, BC FRAMER, BC RIM BOARD, BOISE GLULAM, SIMPLE FRAMING SYSTEM, VERSA-LAM, VERSA-RIM, VERSA-STRAND, and VERSA-STUD are trademarks of Boise Cascade Company or its affiliates.

The information in this document pertains to use in the UNITED STATES ONLY, Allowable Stress Design. Refer to the ALLJOIST Specifier Guide Canada for use in Canada, Limit States Design.

Your Dealer is:

If no dealer is listed, call 1-800-232-0788

For information about Boise Cascade Engineered Wood Products, including sales terms and conditions, warranties and disclaimers,

visit our website at www.BCewp.com



Boise Cascade
Engineered Wood Products

Great products are only the beginning.®